

PMI 3000




Pramac PMi series inverter: optimal solution to combine silent operation with less fuel consumption and tension stability; the inverters Pramac stabilize the output tension and supply power for all kinds of equipment. They guarantee maximum efficiency: adjusting the speed according to the required load, our inverters reduce the average fuel consumption.

PERFORMANCE

| | | |
|-------------|-------|------|
| Frequency | Hz | 50 |
| Voltage | V | 230 |
| Phase | | 1 |
| Max Power | Watts | 3000 |
| Rated Power | Watts | 2800 |



| Engine | | |
|-------------------------|-----|----------|
| Brand | | Pramac |
| Type | | OHV |
| Exhaust emission level | | Stage V |
| Operating Speed Nominal | rpm | Variable |
| Fuel | | Petrol |
| Starting Systems | | Recoil |
| Oil capacity | l | 0.52 |
| Low Oil Shutdown | | √ |

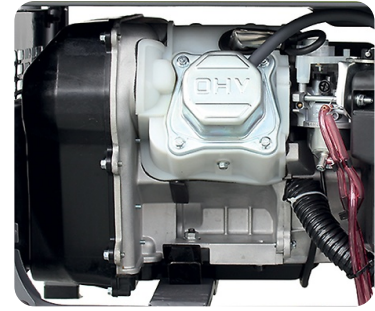

| Alternator | |
|---------------------------|----------|
| Voltage regulation system | Inverter |

| Dimensional data | | |
|----------------------------|--------|-------------|
| Length | (L) mm | 555 |
| Width | (W) mm | 400 |
| Height | (H) mm | 450 |
| Dry weight | Kg | 38 |
| Carton box dimension LxWxH | mm | 585x415x465 |



| Autonomy | | |
|----------------------|-----|-----|
| Fuel tank capacity | | 10 |
| Fuel consumption 50% | l/h | 1.6 |
| Running time 50% | h | 6 |



| Noise level | | |
|------------------------------|-------|----|
| Guaranteed noise level (LWA) | dB(A) | 96 |
| Noise pressure level @ 7 m | dB(A) | 68 |

GENSET CONTROL

COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Voltmeter, Frequency meter and Hourmeter (display)
- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)

PROTECTIONS

- Overload
- Oil Guard

OUTPUT:

- DC12V 6A



SOCKET TYPE

SCHUKO 230V 16A IP44

2

