

DF 7500 - DF 15000 - DF 20000



TECHNICAL SPECIFICATIONS	DF 7500	DF 15000	DF 20000
Electrical engine power (fan)	7,5 kW	15 kW	22 kW
Smallest generator required	20 kW - three-phase	35 kW - three-phase	50 kW - three-phase
Coverage (without wind)	30 - 40 m	40 - 50 m	50 - 60 m
Electrical connection	Inlet plug three-phase - 32 A	Inlet plug three-phase - 32 A	Inlet plug three-phase - 63 A
Water connection	UNI 45 / STORZ / CAMLOCK	UNI 45 / STORZ / CAMLOCK	UNI 45 / STORZ / CAMLOCK
Minimum inlet pressure	1,0 bar	1,0 bar	1,0 bar
Water consumption	52 L/min	60 L/min	70 L/min
Water inlet filter	180 µm	180 µm	180 µm
Working angle	335°	335°	335°
Tilting	0 - 40°	0 - 40°	0 - 40°
Dimensions with tow bar and wheels (L x W x H)	3300 x 1830 x 2180 mm	3300 x 1830 x 2180 mm	3300 x 1830 x 2180 mm
Weight	760 kg	810 kg	850 kg



STANDARD EQUIPMENT

- Integrated control panel
- Phase inverter
- Booster pump with peripheral impeller
- Flowmeter for pump protection
- Pressure gauge for outlet pressure reading
- Stainless steel crown with nozzles
- Water drain system
- Equipped with 2 wheels, tow bar and forklift pockets
- 2 height adjustable stabilizers

OPTIONAL

- Remote control
- Available on homologated road trailer type C (adjustable)
- Documents for road registration CE
- Automatic rotation system
- Electric tilting
- Dosing pump for chemical additives
- 2,2kW water supply pump
- Arctic kit
- Side forklift pockets (for low speed trailer only)
- Dedicated colour (RAL) (for spray cannon only)
- Hitch: 50mm ball or 68mm eyelet

MAXIMUM HORIZONTAL RANGE

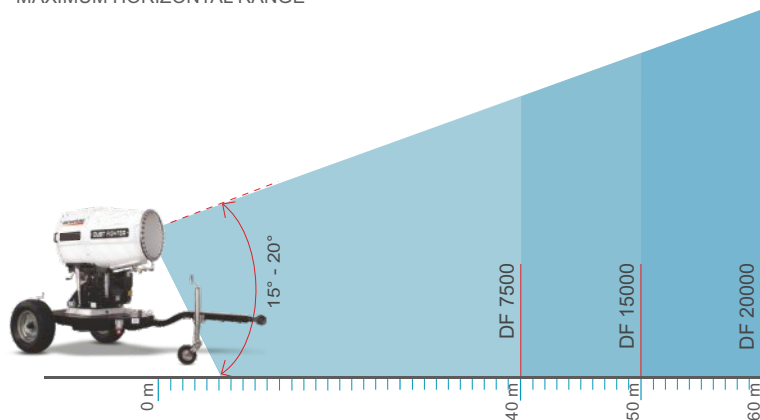

ROTATION ANGLE

