

## DF 3000 MPT



| TECHNICAL SPECIFICATIONS                               | DF 3000 MPT                 |
|--|-----------------------------|
| Electrical engine power (fan)                          | 2,2 kW                      |
| Coverage (without wind)                                | 20 m                        |
| Integrated generating set                              | 3,7 kW - 230 V - Yanmar L70 |
| Fuel tank capacity                                     | 18 L                        |
| Water tank capacity                                    | 1000 L                      |
| Water consumption                                      | 6,25 L/min                  |
| Running time   | 160 min                     |
| Water inlet filter                                     | 170 µm                      |
| Working angle  | 335°                        |
| Manual tilting system                                  | -30° / +10°                 |
| Dimensions on base (L x W x H min/max)                 | 2380 x 1210 x 2230/3920 mm  |
| Dimensions on road trailer Type A* (L x W x H min/max) | 3920 x 2015 x 2780/4470 mm  |
| Dry weight on base / on road trailer*                  | 490 / 800 kg                |

\* option



## STANDARD EQUIPMENT

- Telescopic vertical mast (max. height: 4m)
- 1000 litres plastic water tank
- 3,7 kW - 230 V integrated generating set
- Integrated control panel
- Stainless steel crown with nozzles
- Nebulizer cone foldable for shipment
- Telescopic mast with double crank winch
- Water Supply and Main Electricity network connections
- High pressure washer connection
- Water drain system
- Structure on base version with forklift pockets

## OPTIONAL

- Low speed trailer (without brakes)
- Road trailer type A (straight) with 50mm ball hitch
- Road trailer type CM (adjustable) with 50mm ball hitch
- Documents for road registration CE

MAXIMUM HORIZONTAL RANGE

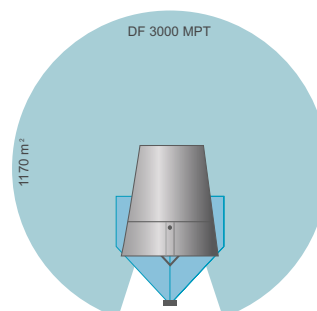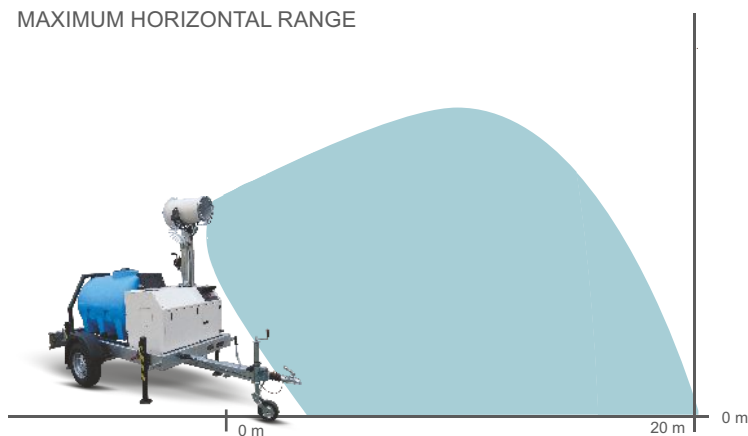

ROTATION ANGLE

