

VOYAGER 6202 H



Control panel





3000 rpm Honda engine



Fuel inlet and outlet



Unit of measure: mm

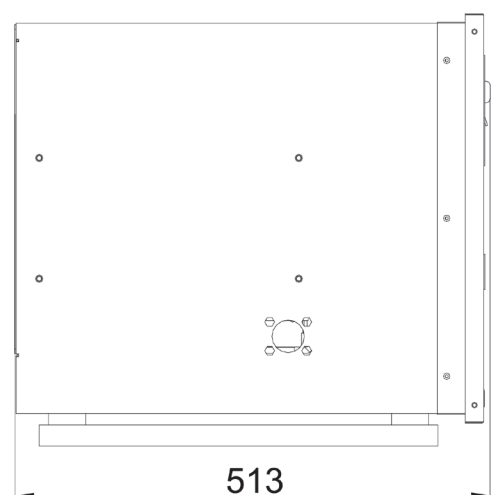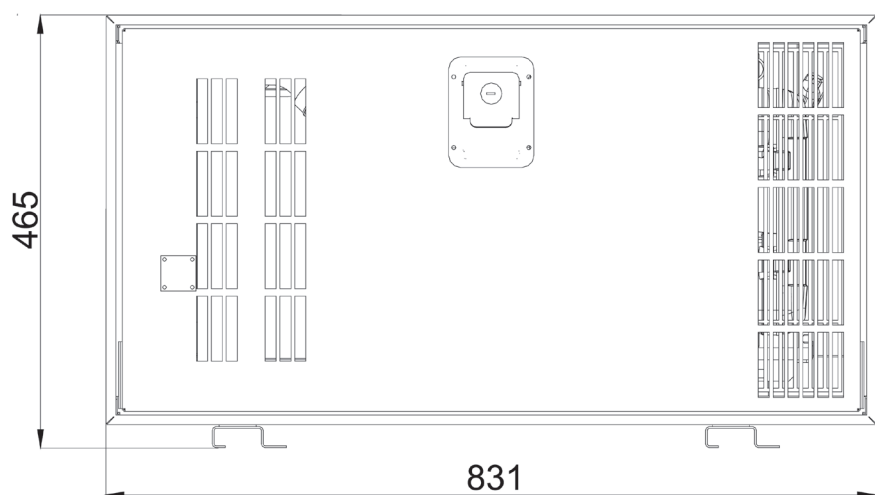

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com





Output power 6,2 kVA single-phase

Description

- Vehicular generator
- Petrol engine 3000 rpm
- Muffler inside
- Super silenced model

Standard Features

- Remote control panel with:
 - Multifunction display showing single-phase generator voltage, battery voltage, frequency, hour meter, rpm
 - Start / Stop button
 - AUTO mode push-button for starting from external contact
- On board:
 - Connection cable to remote panel
 - Safety shutdown in case of low oil level, high water temperature
 - Circuit breaker for the generator protection.
 - General shutdown switch
 - Built-in muffler

Options

- 20 Lt plastic fuel tank with brackets
- 20 Lt steel fuel tank with brackets
- Fuel reserve indicator kit
- Fuel filler with key lock cap
- 1 mt tank connection pipe with fuel filler

Noise level

- Lwa 83 (58 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Single-phase power (max.): 6,2 kVA - 230V
- Power Factor: $\cos \phi$ 0,8

Petrol Engine 3000 rpm

- Type: Honda GX 390 - 1 cyl. - 11 hp (8,2 kWm) - 390 cm³
- Cooling system: air
- Starting system: electric
- Fuel consumption @ 75%: 3,3 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 831 x 513 x 465 mm
- Dry weight: 140 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.