

THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 225 MB 4

4 POLES

CONTINUOUS DUTY

50 Hz-1500 min⁻¹ / 60 Hz-1800 min⁻¹

AMBIENT TEMPERATURE	40°C	WINDING DATA								
TEMPERATURE RISE	H	Winding code		MO						
INSULATION CLASS	H	Number of leads		12						
POWER FACTOR	0,8	Winding pitch		2/3						
FREQUENCY	Hz	50		60						
VOLTAGE	Star series	380	400	415	440	380	416	440	460	480
	Star parallel	190	200	208	220	190	208	220	230	240
RATING	kVA	128	135	135	122	135	146	155	162	169
	kW	102	108	108	98	108	117	124	130	135
EFFICIENCY (%) @ 0,8 p.f.	4/4	91,8	92,0	92,3	92,8	91,5	92,1	92,0	92,2	92,4
	3/4	93,0	93,1	93,3	93,5	92,7	93,1	93,0	93,2	93,3
	2/4	93,9	93,9	93,9	93,7	93,6	93,8	93,7	93,8	93,9
EFFICIENCY (%) @ 1,0 p.f.	4/4	93,8	94,0	94,3	94,9	93,4	93,9	93,9	94,1	94,2
	3/4	94,8	95,0	95,1	95,4	94,4	94,8	94,7	94,9	95,0
	2/4	95,5	95,6	95,7	95,6	95,1	95,4	95,3	95,4	95,5
STAND-BY RATING (163/27)	kVA	141	149	149	134	149	161	171	178	186
STAND-BY EFFICIENCY (%) @ 0,8 p.f.		91,3	91,6	91,8	92,5	91,0	91,6	91,6	91,8	92,0
SHORT CIRCUIT RATIO (referred to class H rating)		0,32	0,34	0,36	0,45	0,25	0,28	0,30	0,31	0,32
REACTANCES (%) (referred to class H rating)										
Direct axis synchronous	x _d	402	382	355	286	509	459	436	416	399
Quadrature axis synchronous	x _q	167	159	148	119	211	191	181	173	166
Direct axis transient	x' _d	24,1	23,0	21,3	17,1	30,5	27,6	26,1	25,0	24,0
Direct axis subtransient	x'' _d	12,5	11,9	11,1	8,9	15,9	14,3	13,6	13,0	12,4
Quadrature axis subtransient	x'' _q	13,8	13,1	12,2	9,8	17,4	15,7	14,9	14,3	13,7
Negative sequence	x ₂	13,2	12,5	11,6	9,4	16,6	15,0	14,3	13,6	13,1
Zero sequence	x ₀	6,3	6,0	5,5	4,5	7,9	7,2	6,8	6,5	6,2

TIME CONSTANTS [s]

Open circuit (T' _{do})	1,183	Subtransient (T'' _d)	0,010
Transient (T' _d)	0,108	Armature (T _a)	0,011

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	Available on double bearing configuration (on request)
N-end bearing/Lubrication	6309 2RS1 C3 WT / Prelubricated
Weight [kg]	407
Inertia (J) [kgm ²]	1,17
Overspeed [min ⁻¹]	2250
Method of cooling	IC 01
Cooling air required [m ³ /s] @ 50/60 Hz	0,2 / 0,233
Degree of protection	IP 23
Type of construction available	B2 (B34 on request)
Direction of rotation	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	0,035
Overloads	10% for 1 hour
3-phase short circuit current	>= 300% (3 I _n) with aux. winding or PMG
Voltage regulation accuracy	+/- 0,5 % (@ rated load, balanced and non-distorting, p.f. 0,8)
Radio interference	EN 55011 Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% (at no load)


STANDARDS

IEC 60034-1; BS 4999-5000; NEMA MG 1.32.
--


Typical efficiency curves

50 Hz - 1500 min⁻¹


380 V

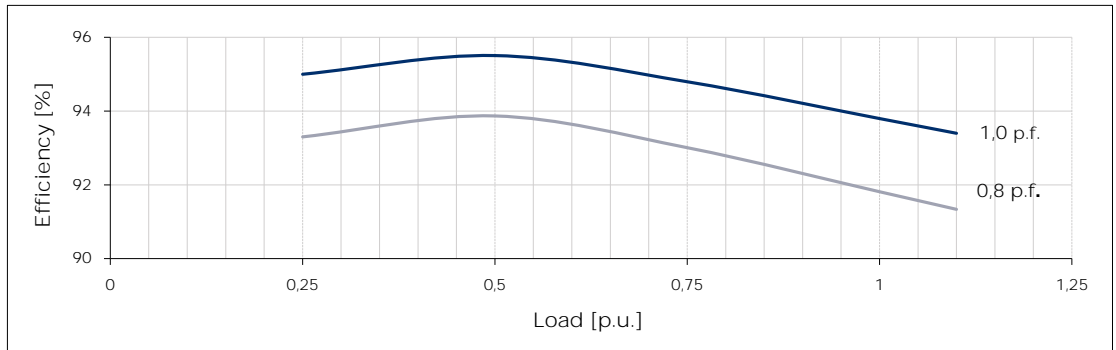


400 V

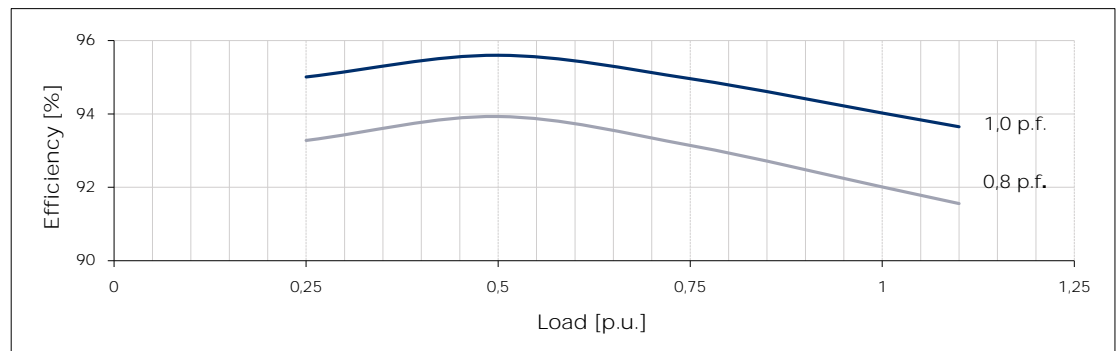

415 V

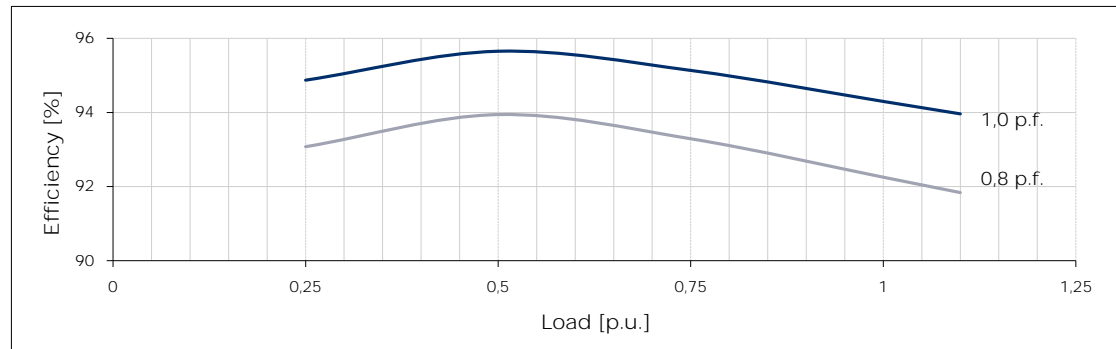


440 V

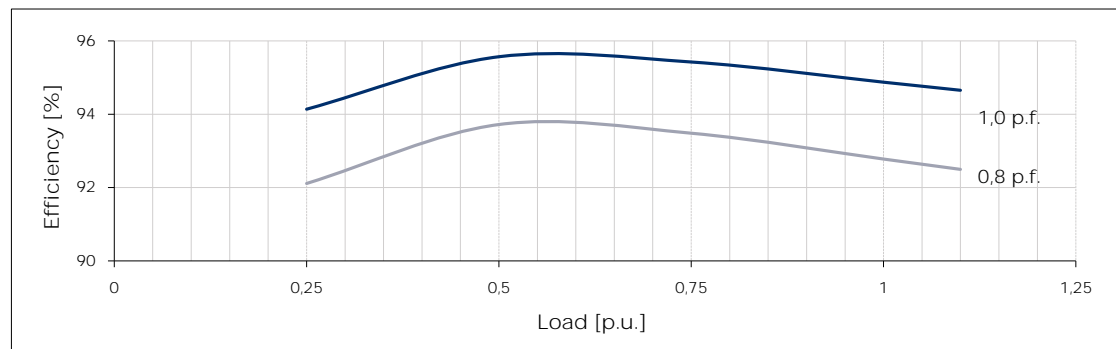


Typical efficiency curves

60 Hz - 1800 min⁻¹


380 V

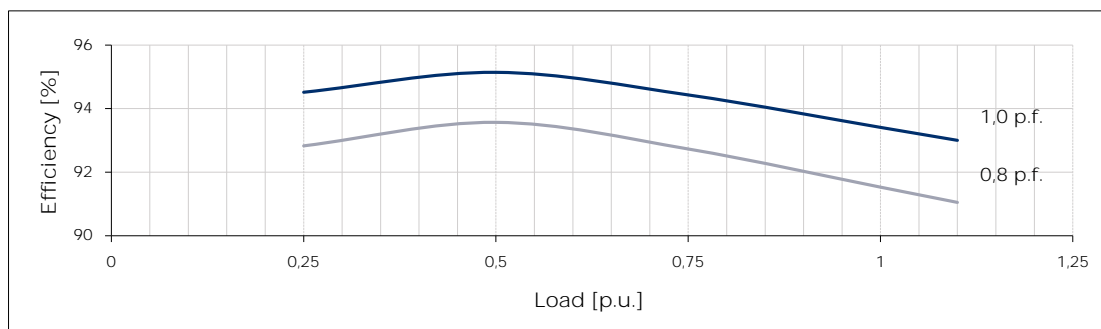


416 V

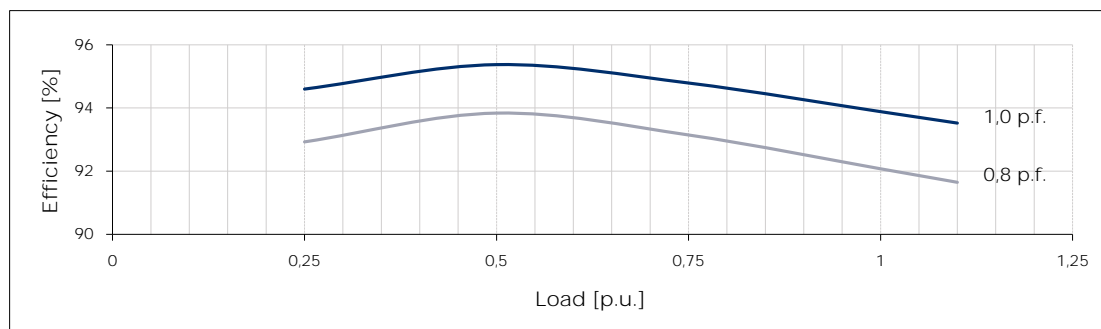


440 V

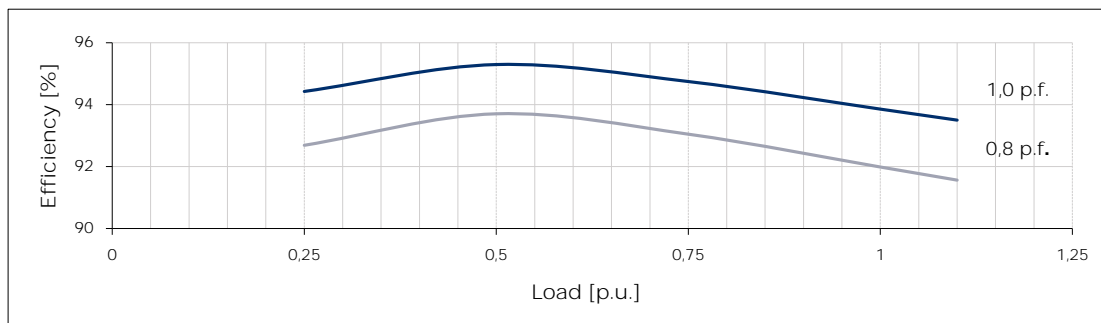

460 V

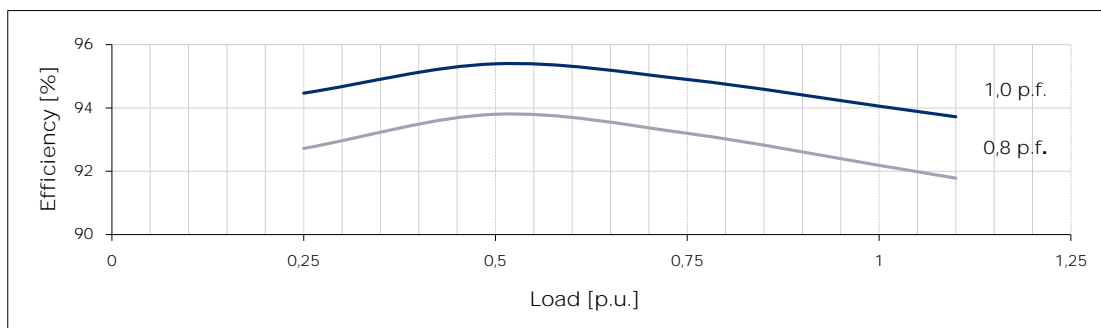

480 V

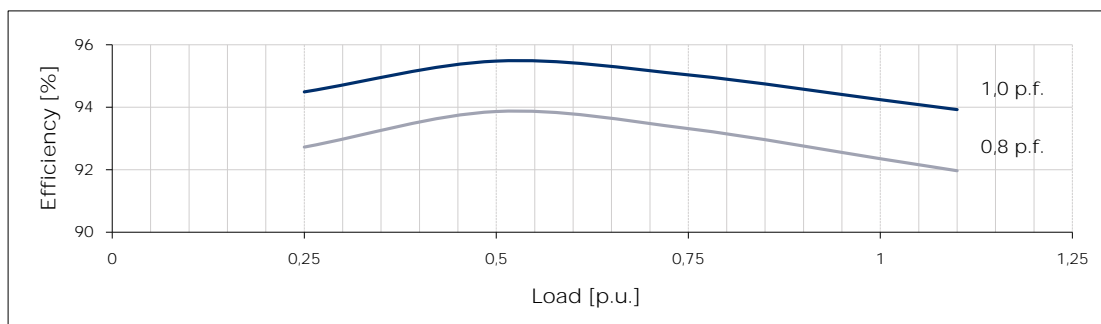




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 225 MB 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

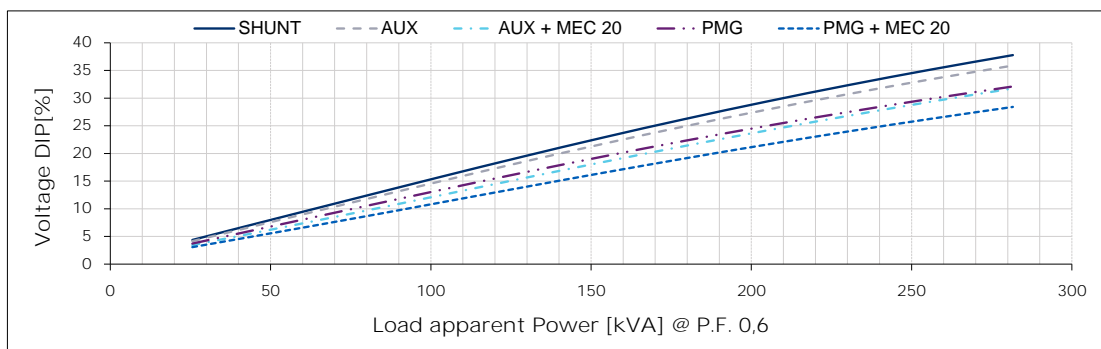


400 V

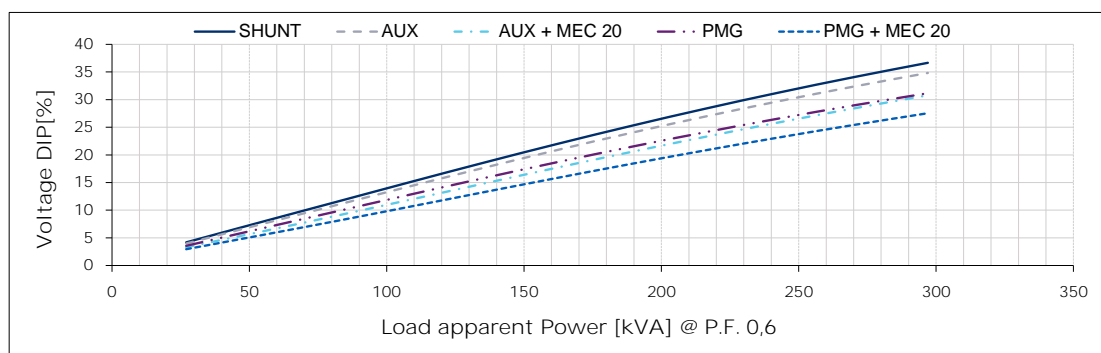

415 V

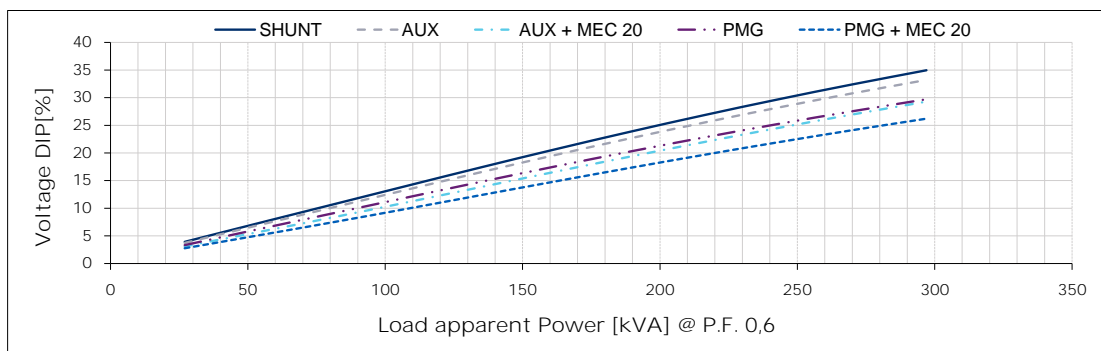

440 V

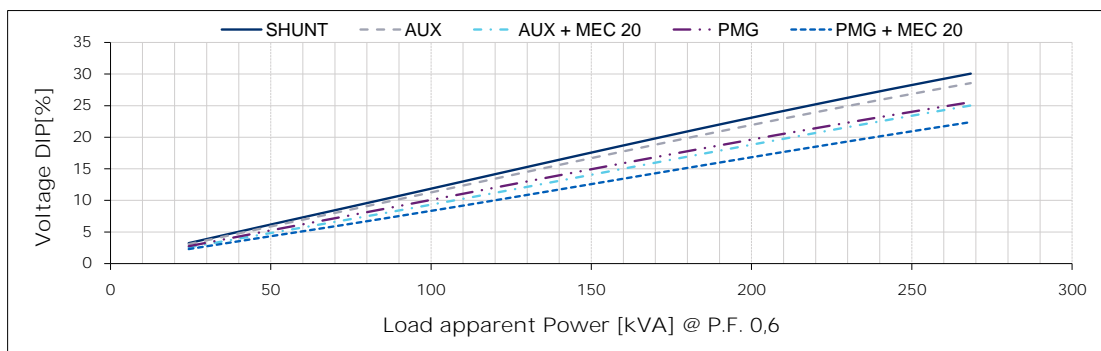




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 225 MB 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

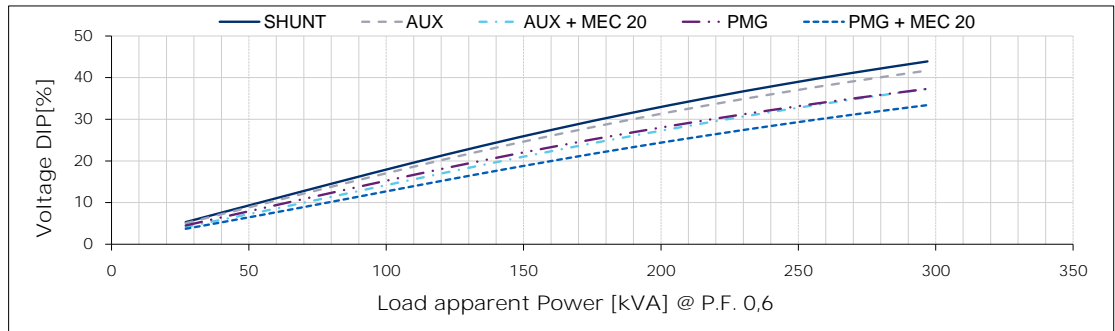


416 V

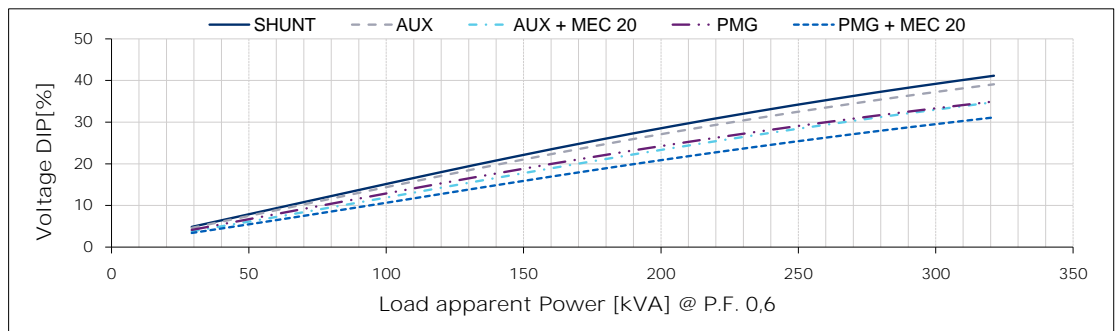


440 V

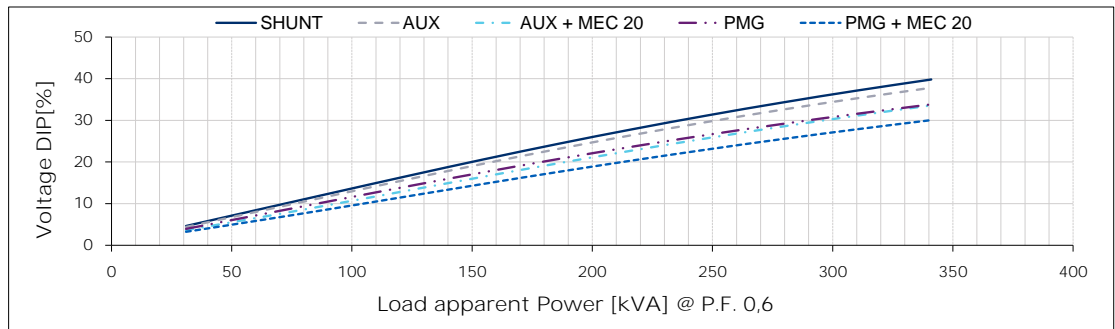

460 V

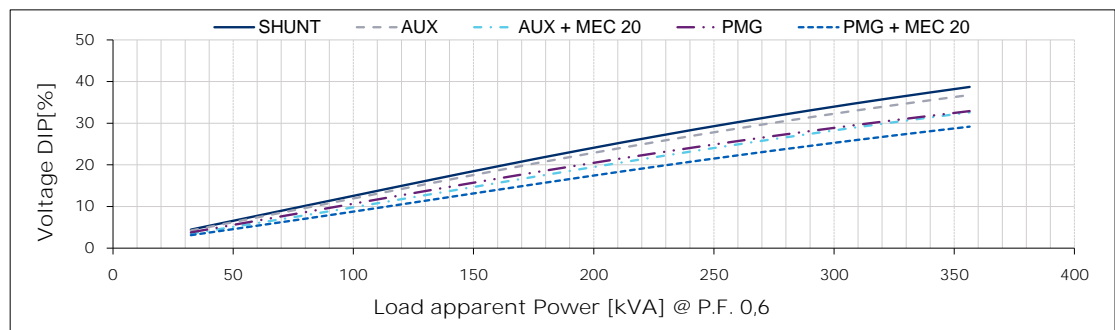

480 V

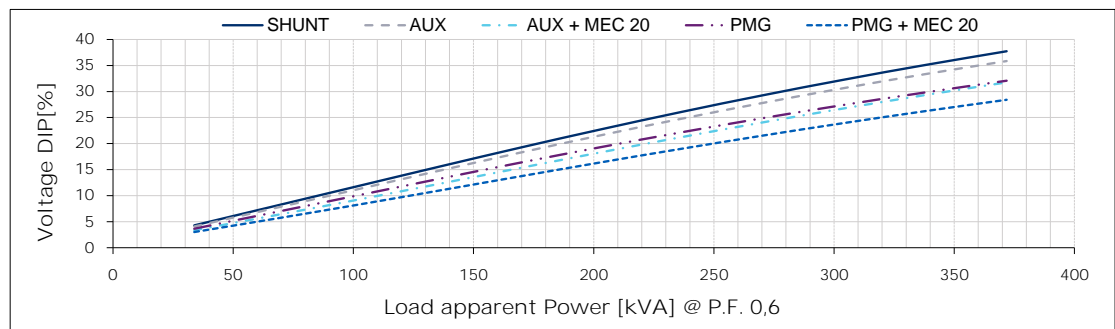

For P.F. different from 0,6 the following simplified formula can be used: $\Delta V @ P.F. = \Delta V @ 0,6 \cdot \sin(\arccos(P.F.)) / 0,8$




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 225 MB 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

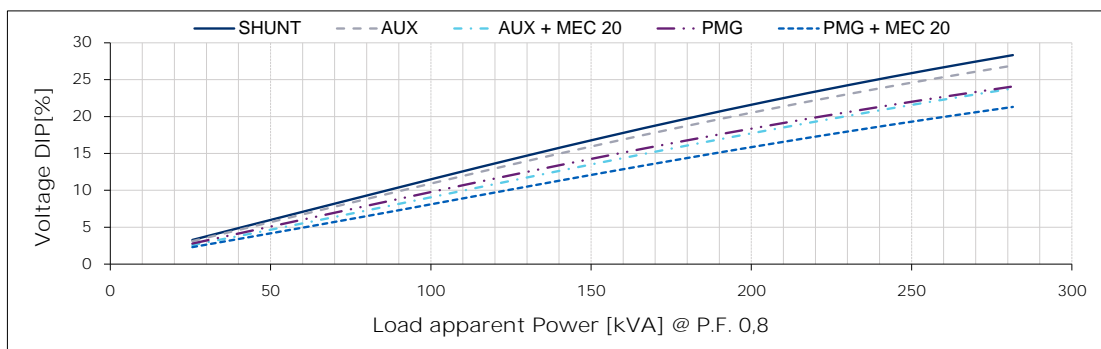


400 V

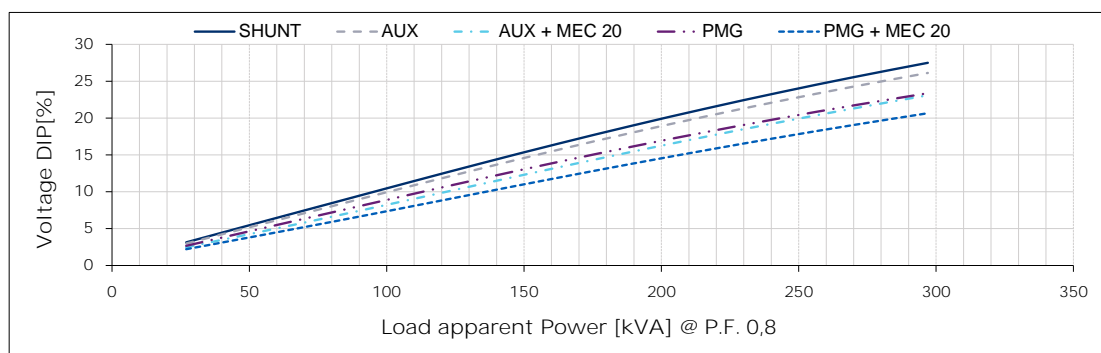

415 V

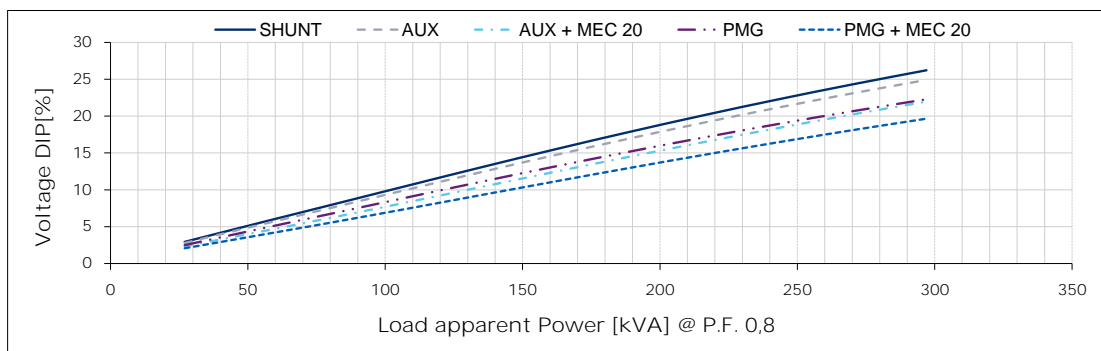

440 V

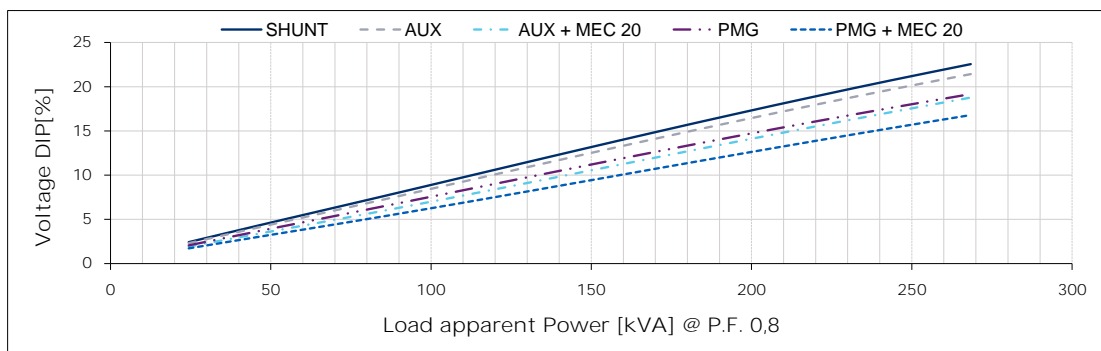




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 225 MB 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

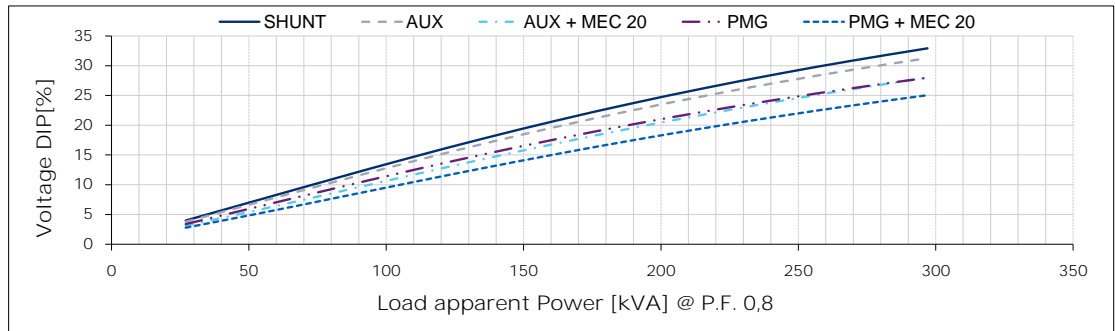


416 V

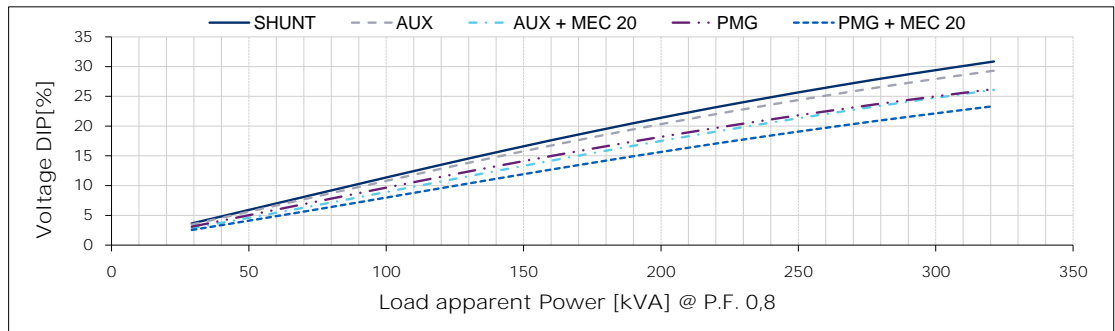


440 V

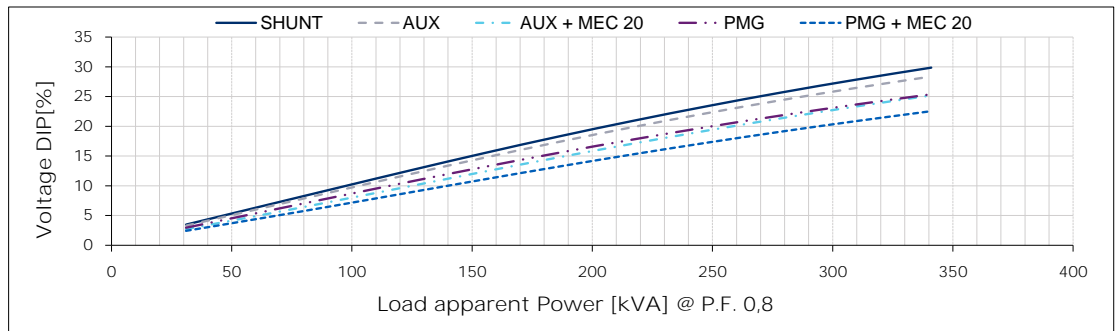

460 V

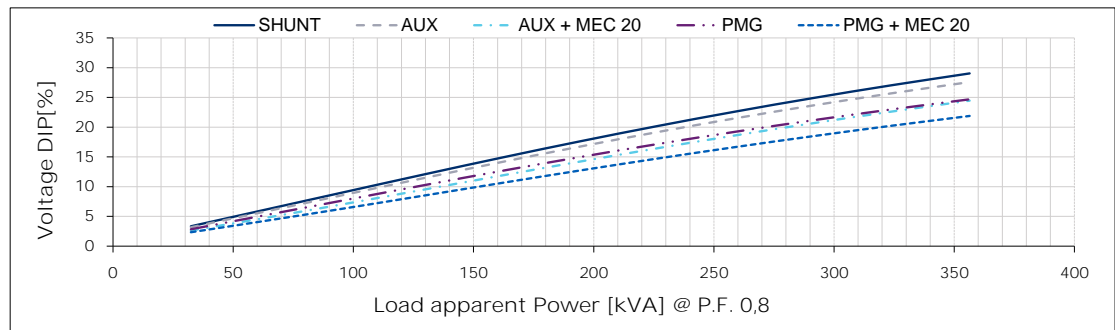

480 V

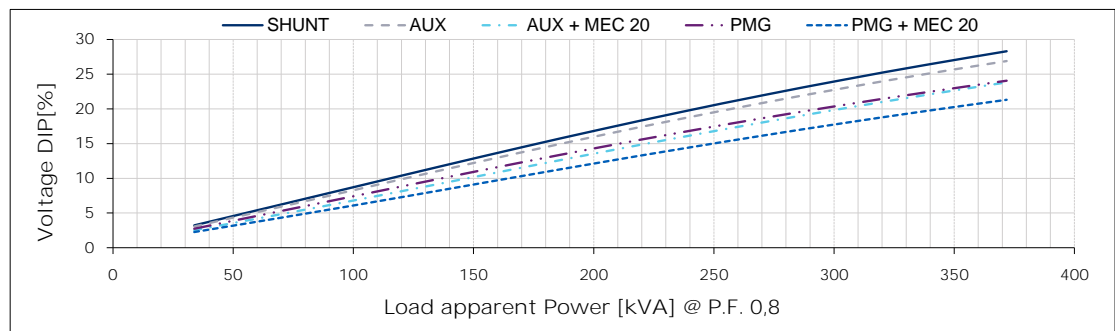


THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 225 MB 4


Typical 3-phase short circuit decrement curves

50 Hz - 1500 min⁻¹


380 V

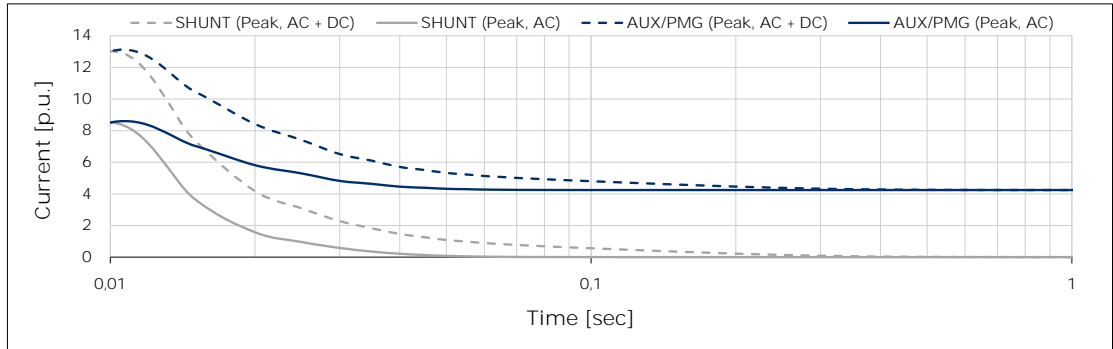


400 V

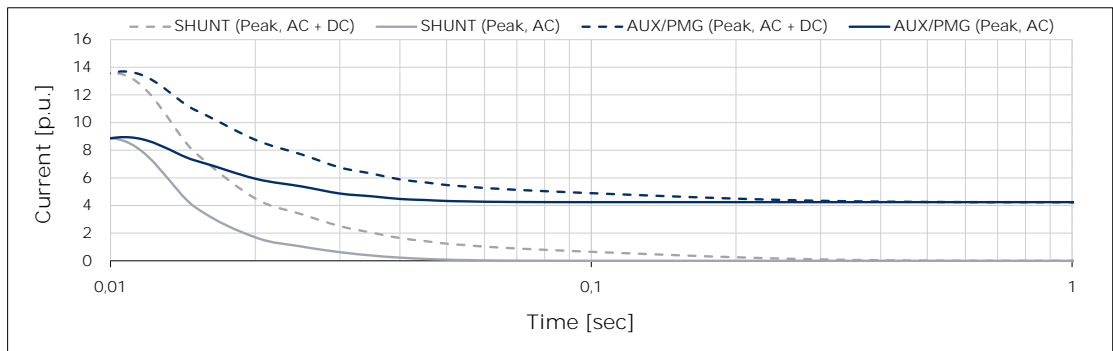

415 V

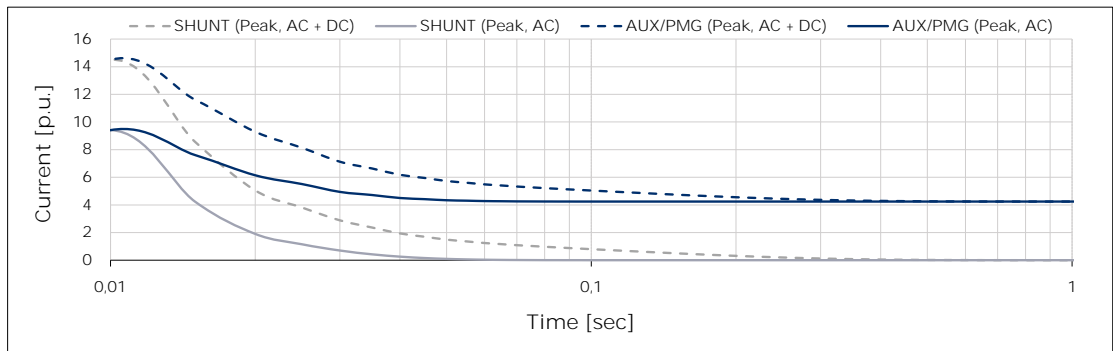


440 V

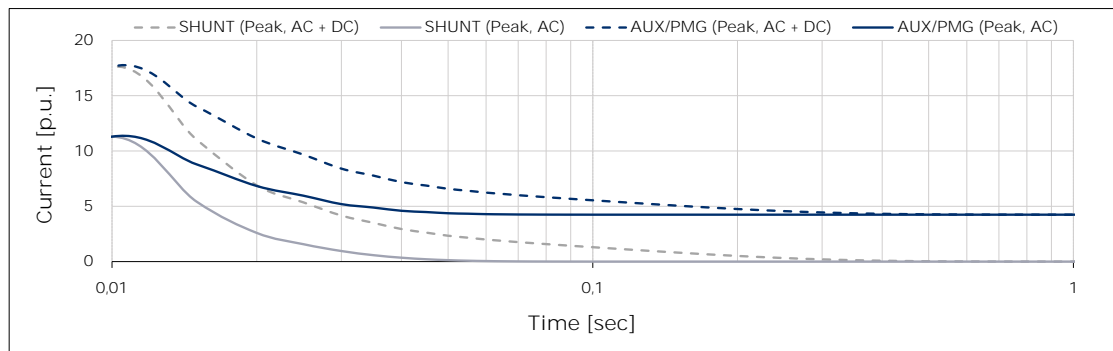


Typical 3-phase short circuit decrement curves

60 Hz - 1800 min⁻¹


380 V

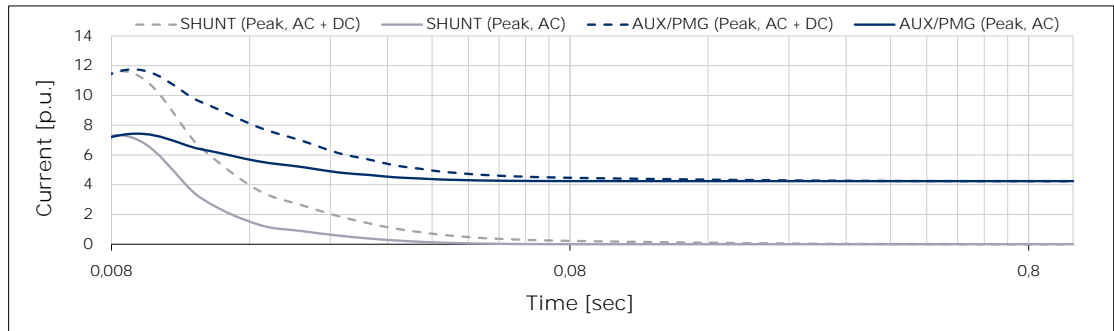


416 V

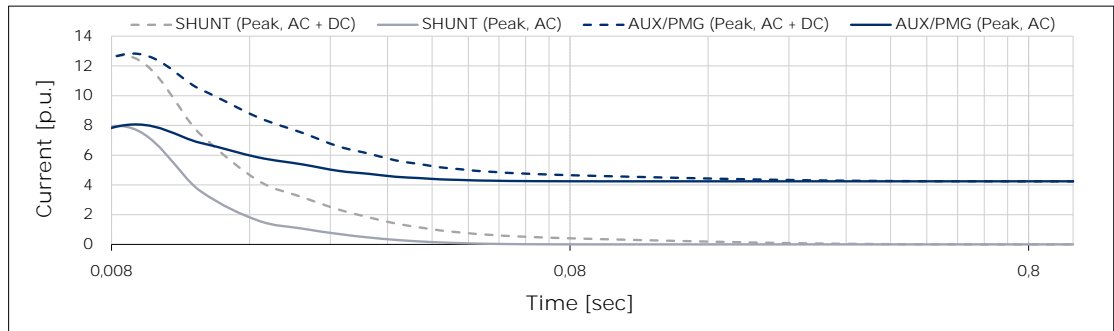


440 V

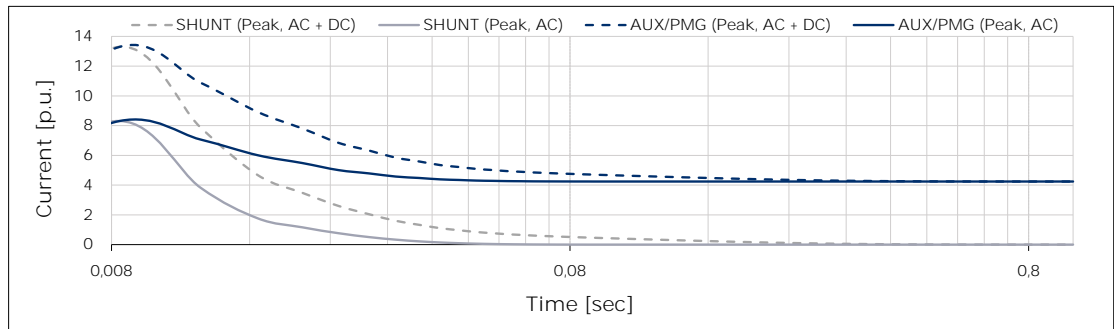

460 V

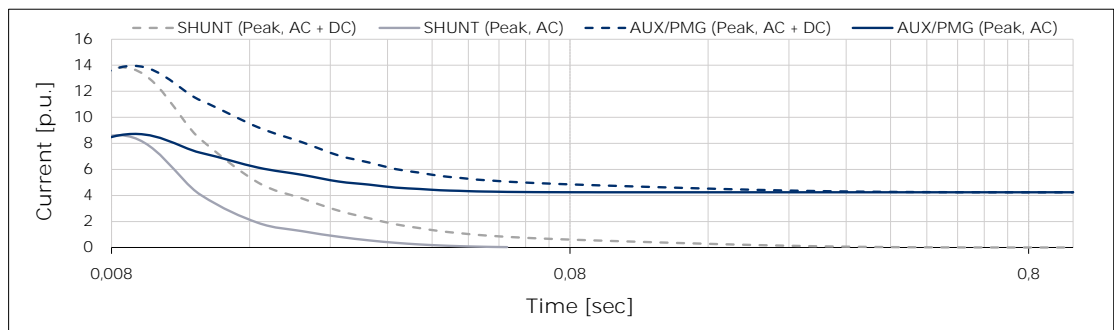

480 V

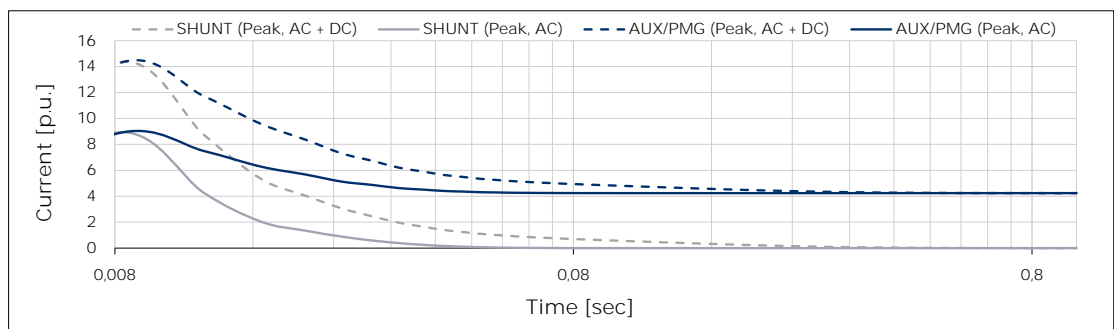


Above curves are based on a three-phase short circuit
For other type of short circuit use the following multiplication factors

	2 phase	1 phase
Instantaneous (max)	0,97	1,22
Continuous	1,50	1,83


SYN.DS.0066_ =

Typical load rejection curves

50 Hz - 1500 min-1

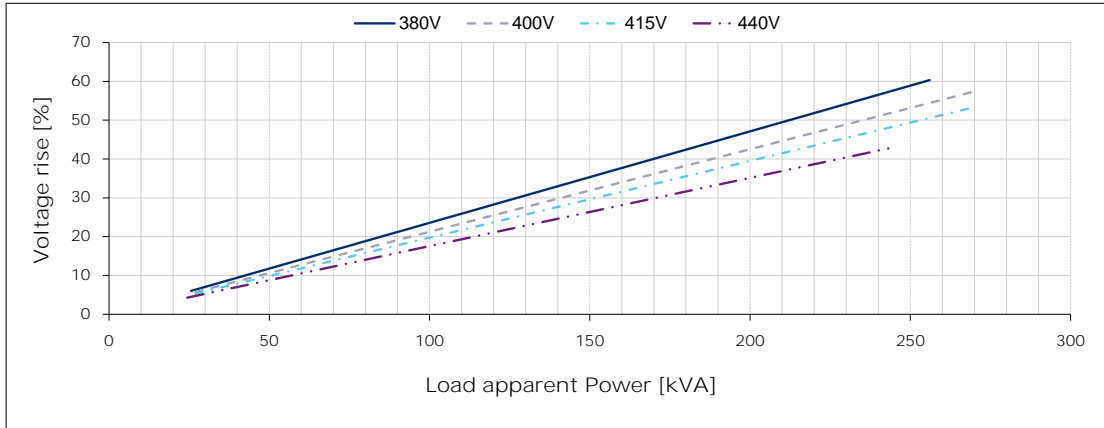

60 Hz - 1800 min-1

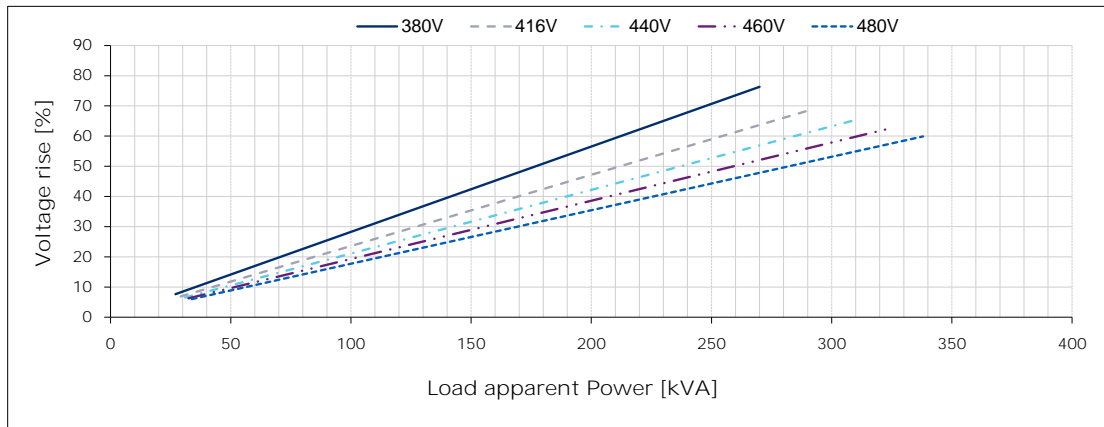

This document is the property of Marelli Motori S.p.A. No part of this document may be copied or reproduced in any way.

The attached information should be considered a guideline for commercial discussion and could be subject to review. Marelli Motori reserves the right to make changes in the data without notice.