

THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 250 MA 4

4 POLES

CONTINUOUS DUTY

50 Hz-1500 min⁻¹ / 60 Hz-1800 min⁻¹

AMBIENT TEMPERATURE	40°C	WINDING DATA									
TEMPERATURE RISE	H	Winding code		MO							
INSULATION CLASS	H	Number of leads		12							
POWER FACTOR	0,8	Winding pitch		2/3							
FREQUENCY	Hz	50			60						
VOLTAGE	Star series	V	380	400	415	440	380	416	440	460	480
	Star parallel		190	200	208	220	190	208	220	230	240
RATING	kVA		230	230	230	207	230	249	264	276	288
	kW		184	184	184	166	184	199	211	221	230
EFFICIENCY (%) @ 0,8 p.f.	4/4		91,9	92,2	92,3	92,7	91,8	92,4	92,6	92,8	92,9
	3/4		93,0	93,2	93,2	93,3	92,9	93,3	93,5	93,6	93,7
	2/4		93,9	93,9	93,7	93,3	93,6	93,9	94,0	94,1	94,1
EFFICIENCY (%) @ 1,0 p.f.	4/4		93,9	94,2	94,4	94,9	93,6	94,1	94,3	94,5	94,6
	3/4		94,8	95,0	95,1	95,3	94,6	94,9	95,1	95,2	95,3
	2/4		95,5	95,5	95,5	95,2	95,2	95,4	95,5	95,6	95,6
STAND-BY RATING (163/27)	kVA		253	253	253	228	253	274	290	304	317
STAND-BY EFFICIENCY (%) @ 0,8 p.f.			91,4	91,8	92,0	92,5	91,4	92,0	92,3	92,4	92,5
SHORT CIRCUIT RATIO (referred to class H rating)			0,36	0,40	0,43	0,54	0,30	0,34	0,35	0,37	0,39
REACTANCES (%) (referred to class H rating)											
Direct axis synchronous	x _d		354	319	297	238	425	384	364	348	333
Quadrature axis synchronous	x _q		146	132	123	98	176	159	150	144	138
Direct axis transient	x' _d		22,0	19,9	18,5	14,8	26,4	23,9	22,6	21,7	20,8
Direct axis subtransient	x'' _d		15,3	13,8	12,8	10,3	18,3	16,6	15,7	15,0	14,4
Quadrature axis subtransient	x'' _q		16,8	15,2	14,1	11,3	20,2	18,2	17,3	16,5	15,8
Negative sequence	x ₂		16,0	14,5	13,4	10,8	19,2	17,4	16,5	15,8	15,1
Zero sequence	x ₀		6,4	5,8	5,4	4,3	7,7	6,9	6,6	6,3	6,0

TIME CONSTANTS [s]

Open circuit (T' _{do})	1,124	Subtransient (T'' _d)	0,008
Transient (T' _d)	0,111	Armature (T _a)	0,012

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	Available on double bearing configuration (on request)
N-end bearing/Lubrication	6313 2Z C3 / Prelubricated
Weight [kg]	599
Inertia (J) [kgm ²]	1,89
Overspeed [min ⁻¹]	2250
Method of cooling	IC 01
Cooling air required [m ³ /s] @ 50/60 Hz	1,7 / 2,1
Degree of protection	IP 23
Type of construction available	B2 (B34 on request)
Direction of rotation	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	0,018
Overloads	10% for 1 hour
3-phase short circuit current	>= 300% (3 I _n) with aux. winding or PMG
Voltage regulation accuracy	+/- 0,5 % (@ rated load, balanced and non-distorting, p.f. 0,8)
Radio interference	EN 55011 Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% (at no load)


STANDARDS

IEC 60034-1; BS 4999-5000; NEMA MG 1.32.
--


Typical efficiency curves

50 Hz - 1500 min⁻¹


380 V

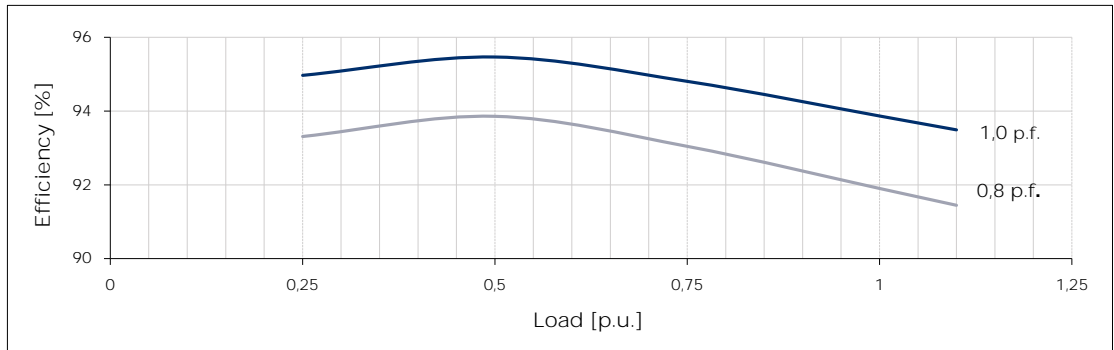


400 V

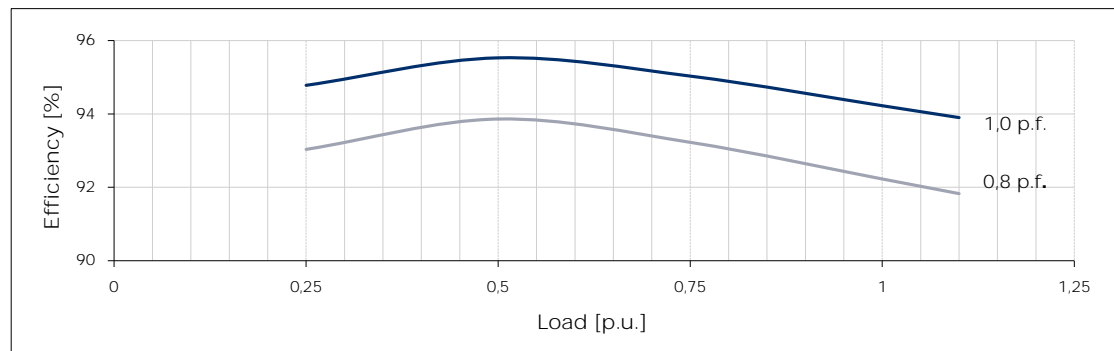

415 V

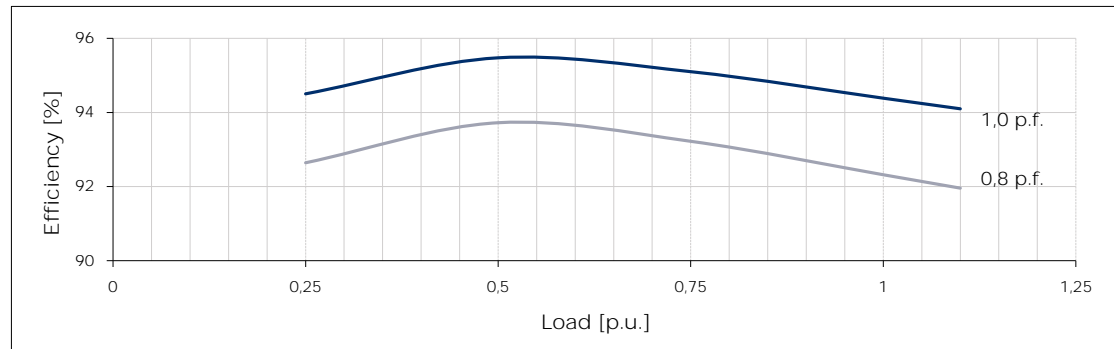

440 V

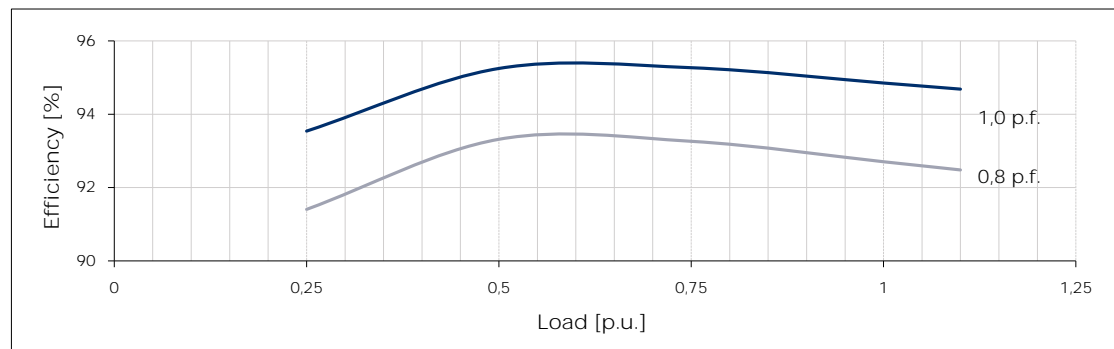


THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 250 MA 4


Typical efficiency curves

60 Hz - 1800 min⁻¹


380 V

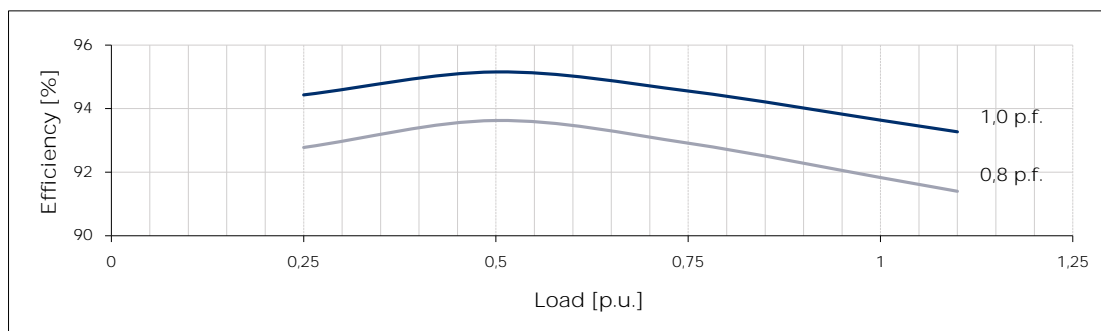


416 V

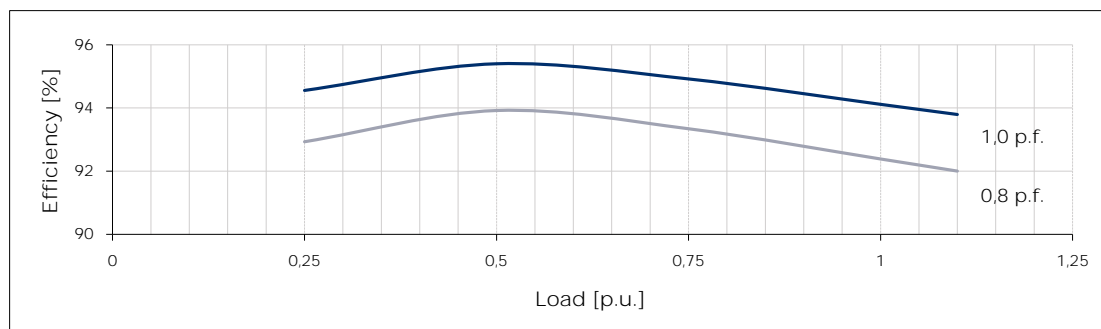


440 V

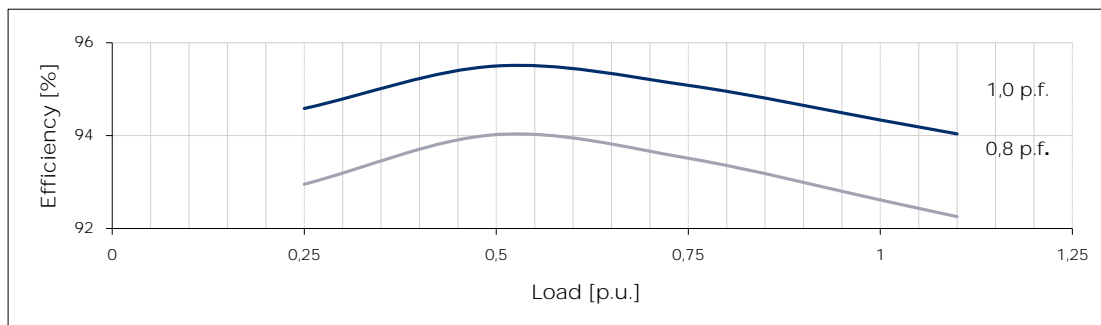

460 V

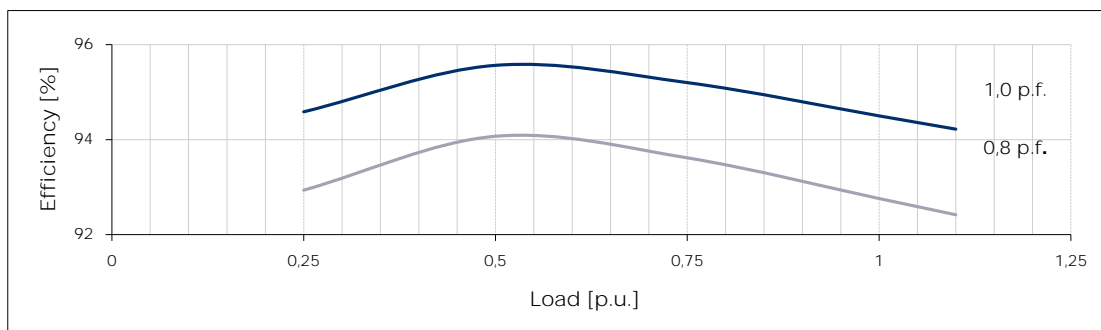

480 V

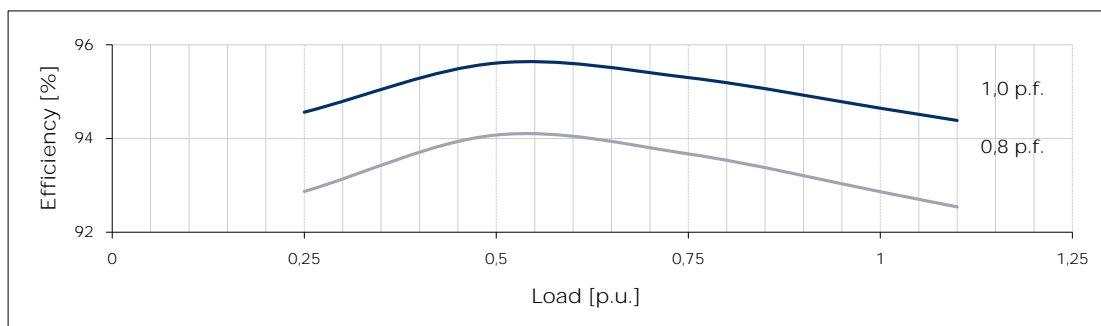




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 MA 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

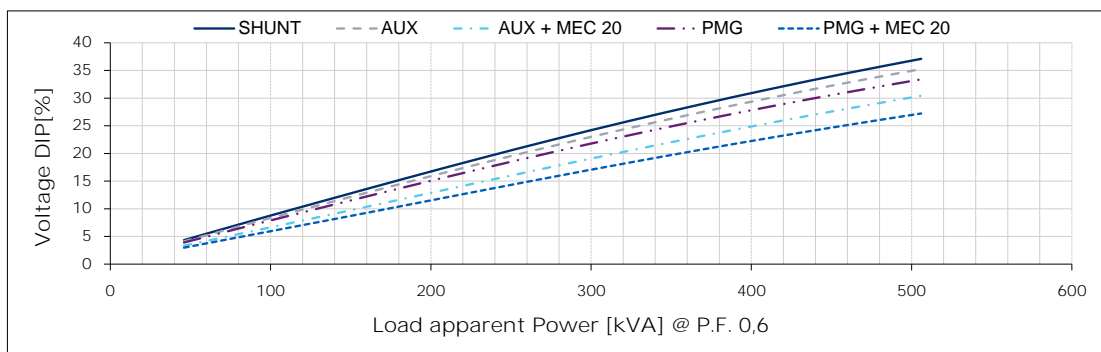


400 V

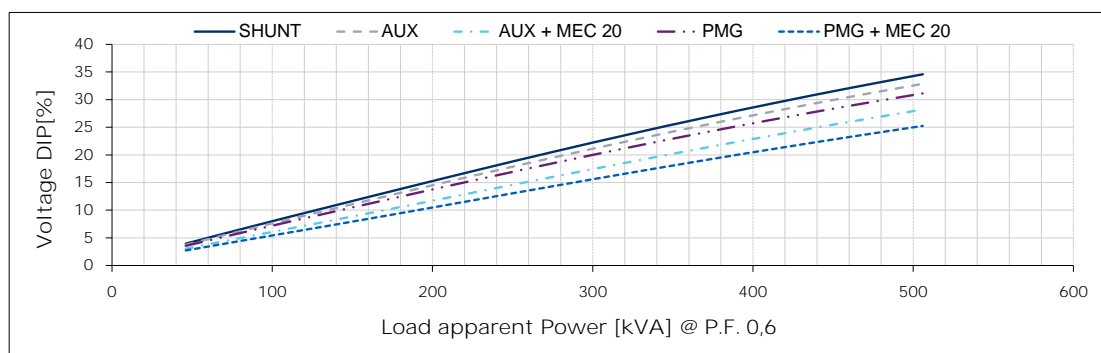

415 V

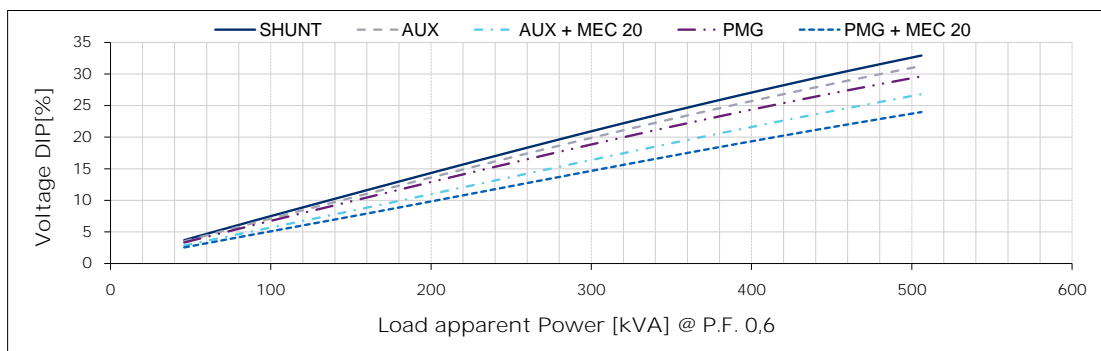

440 V

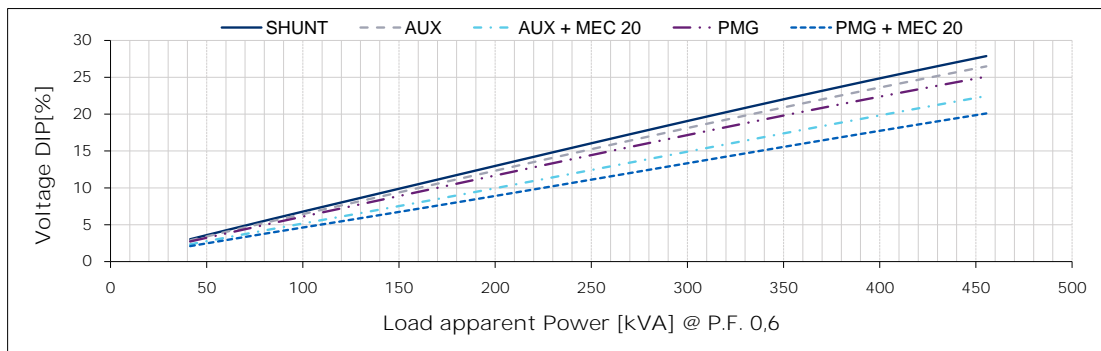




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 MA 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

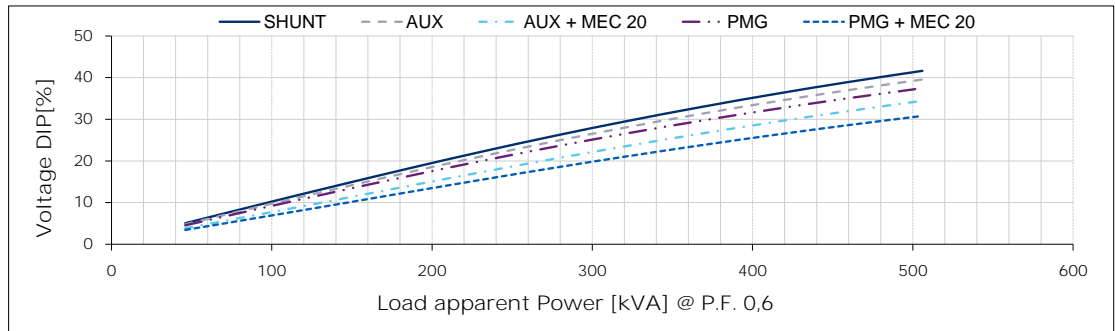


416 V

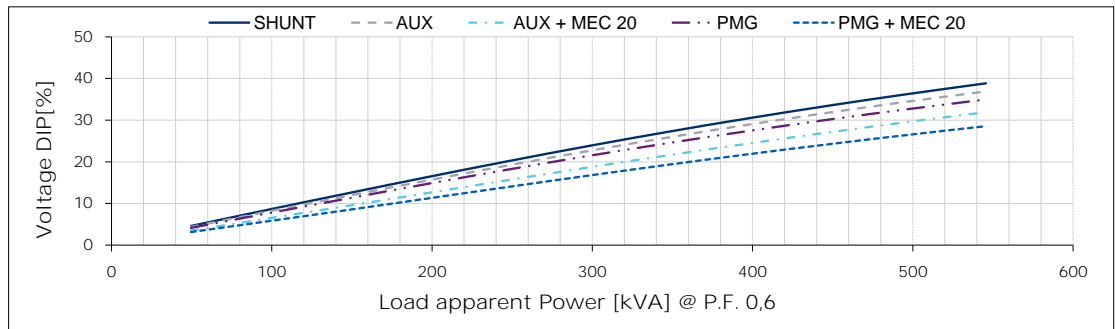


440 V

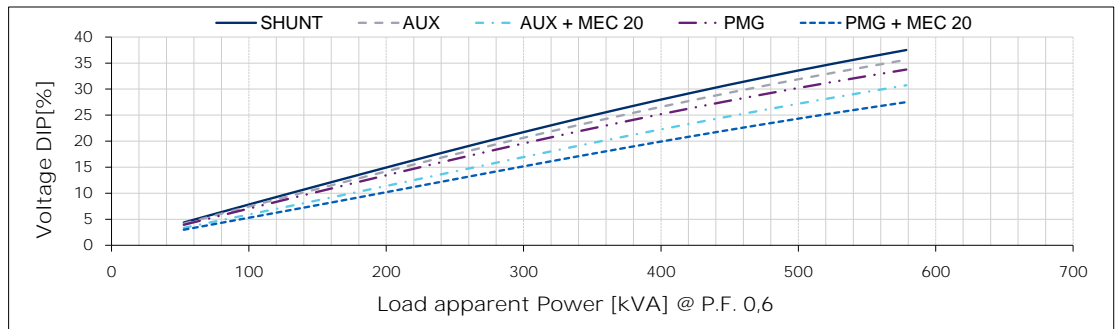

460 V

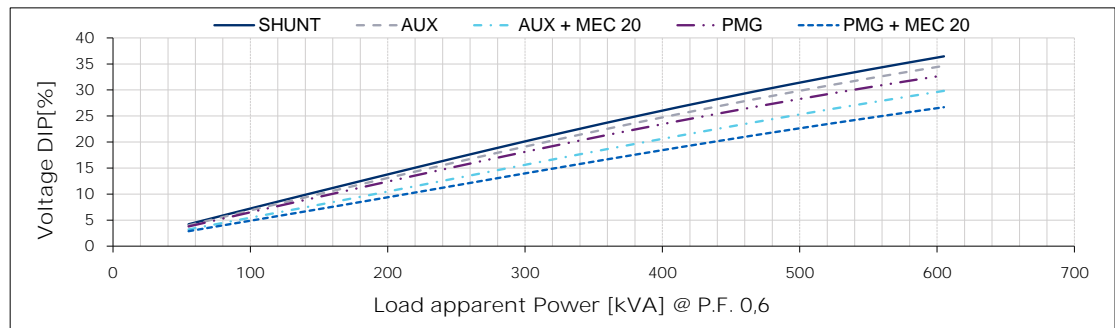

480 V

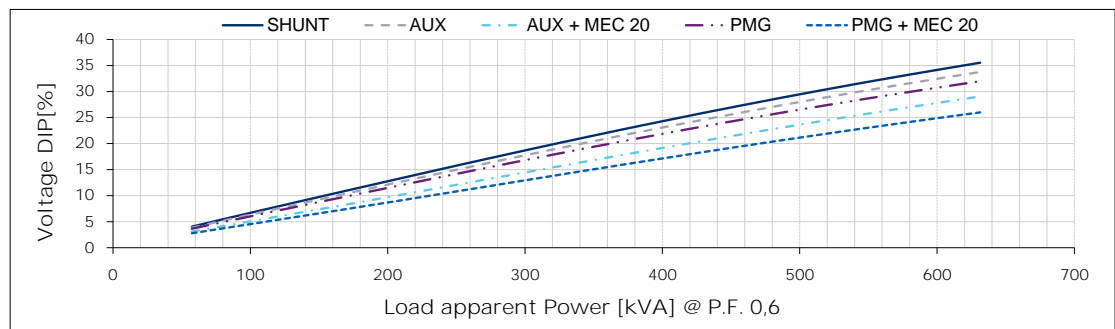

For P.F. different from 0,6 the following simplified formula can be used: $\Delta V @ P.F. = \Delta V @ 0,6 \cdot \sin(\arccos(P.F.)) / 0,8$

SYN.DS.0071_ =




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 MA 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

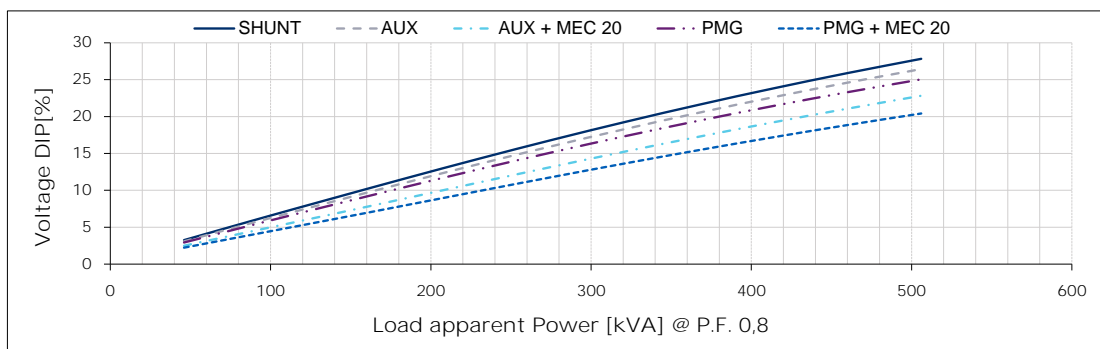


400 V

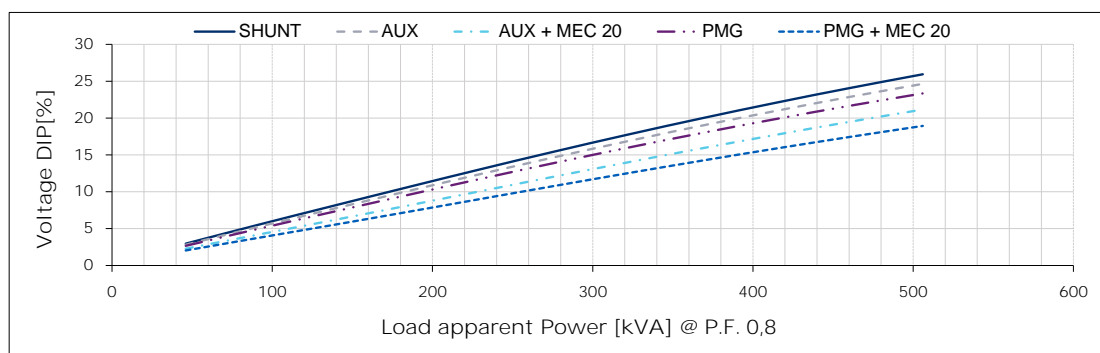

415 V

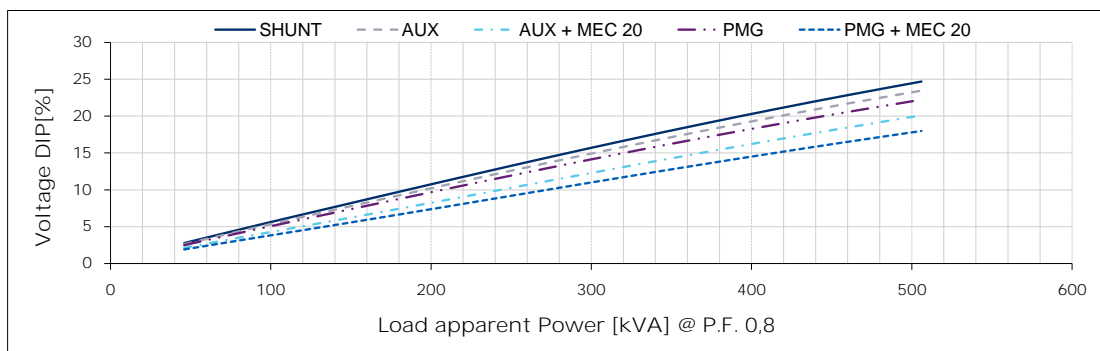

440 V

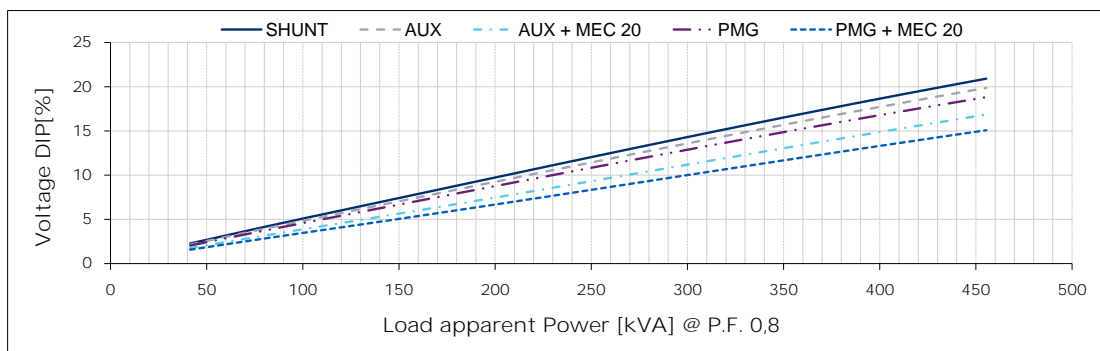




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 MA 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

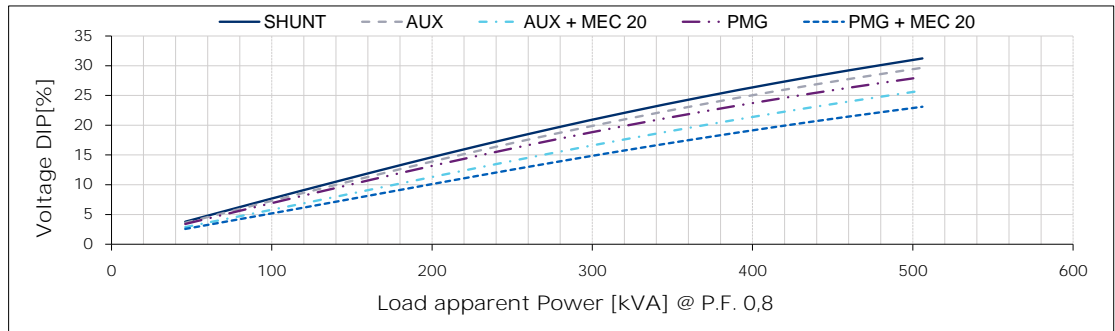


416 V

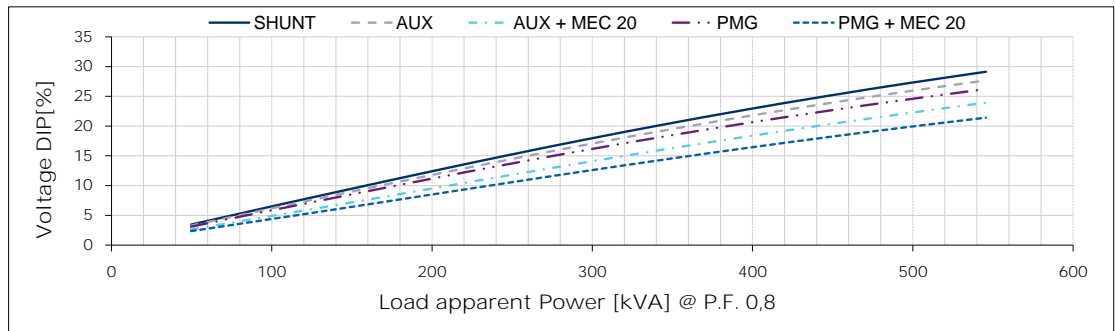


440 V

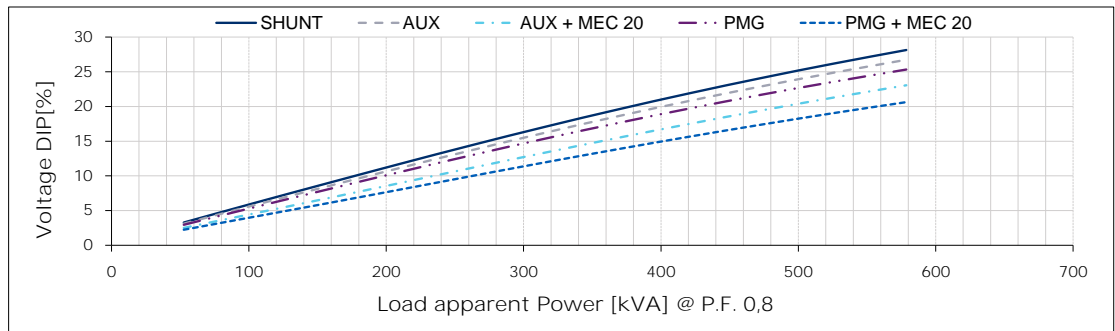

460 V

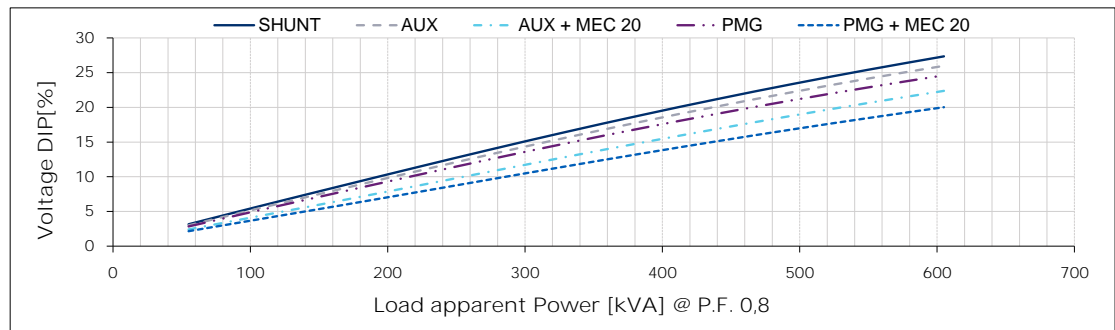

480 V

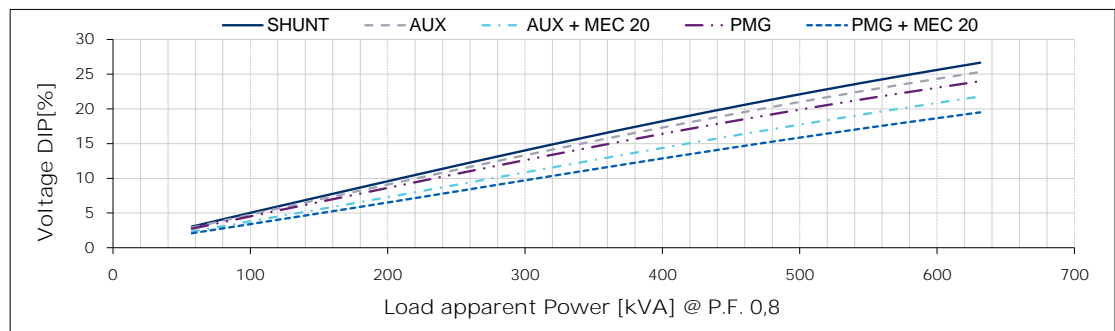


THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 250 MA 4


Typical 3-phase short circuit decrement curves

50 Hz - 1500 min⁻¹


380 V

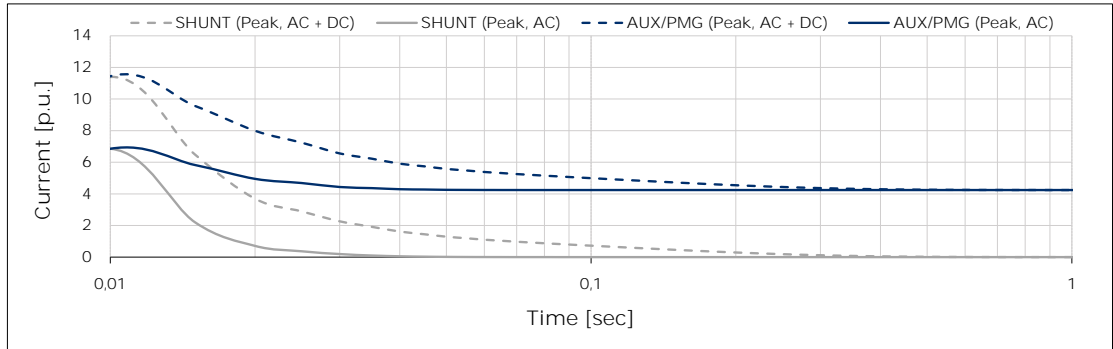


400 V

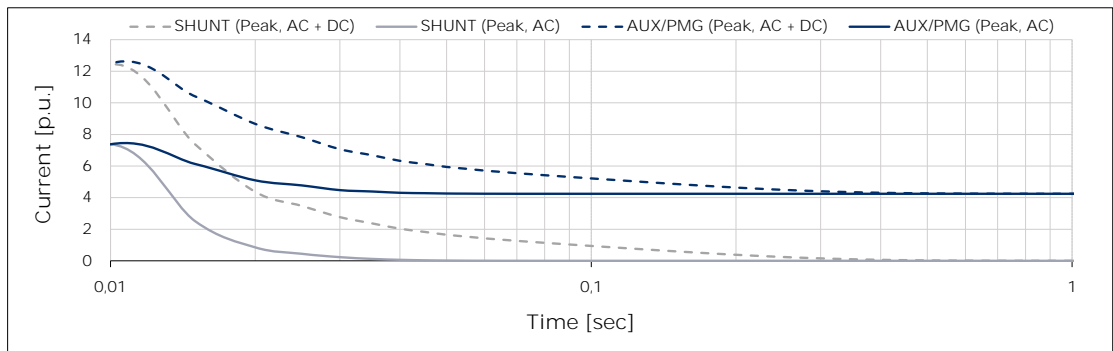

415 V

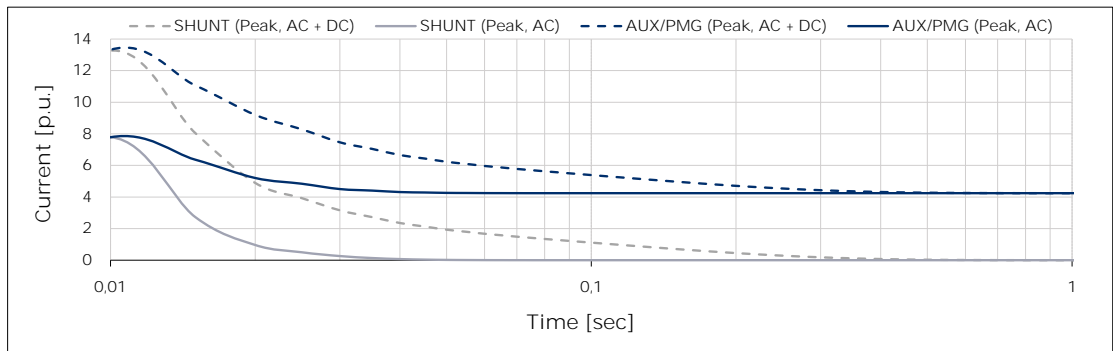

440 V

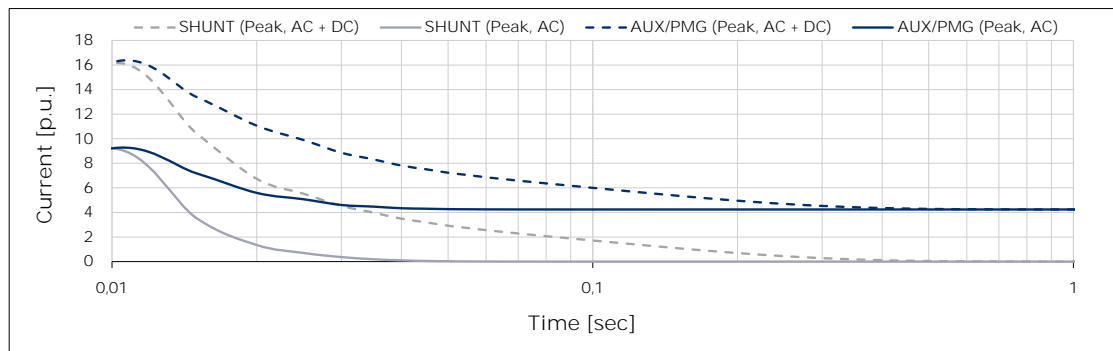


THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 250 MA 4


Typical 3-phase short circuit decrement curves

60 Hz - 1800 min⁻¹


380 V

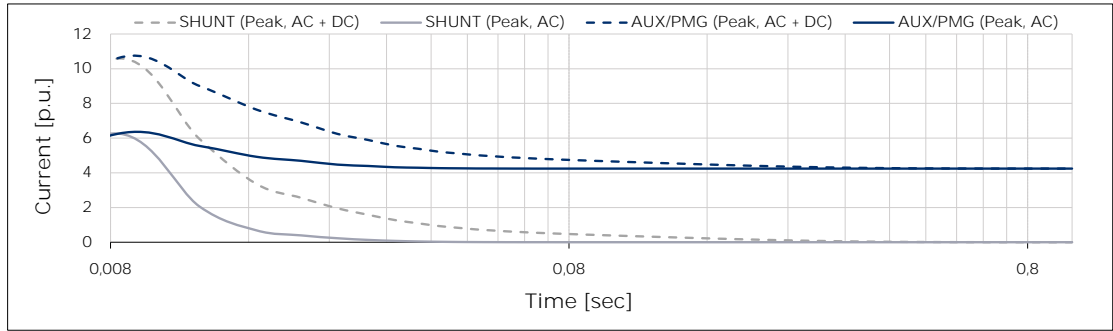


416 V

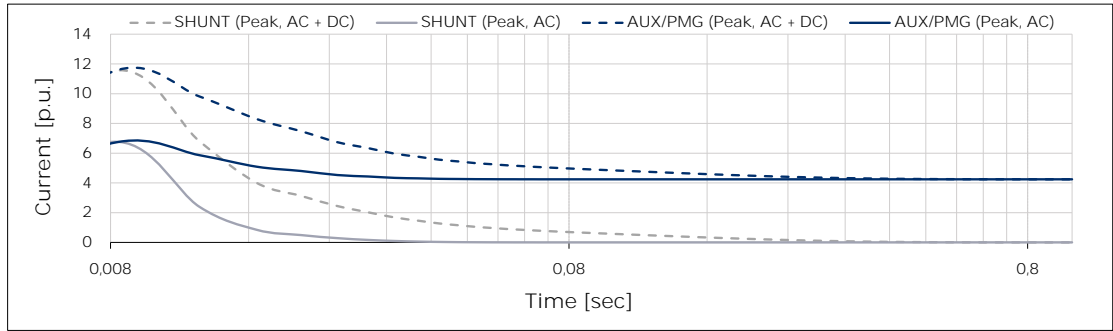


440 V

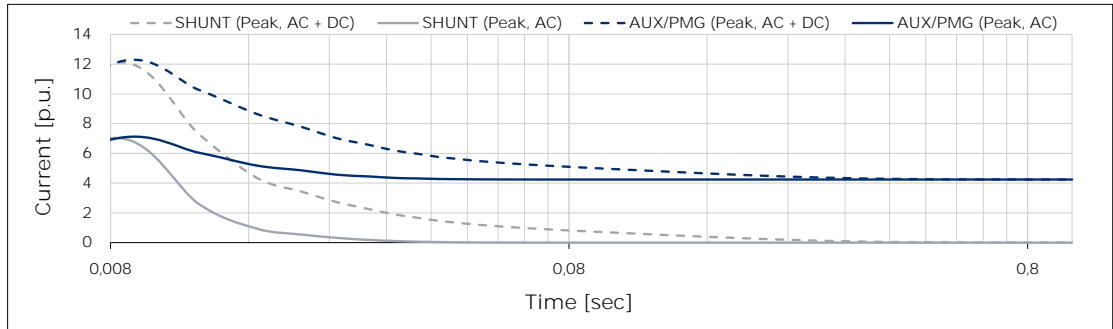

460 V

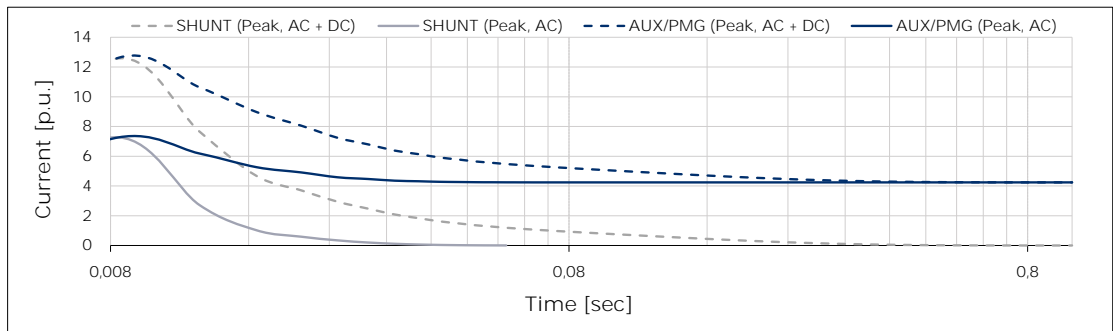

480 V

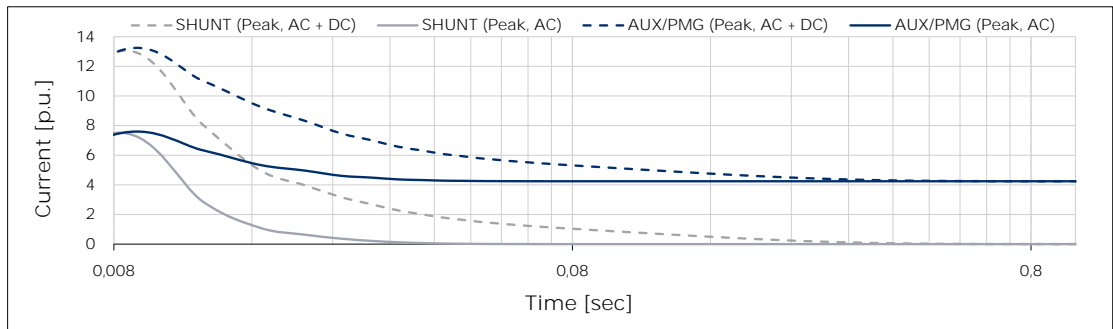


Above curves are based on a three-phase short circuit
For other type of short circuit use the following multiplication factors


	2 phase	1 phase
Instantaneous (max)	0,94	1,18
Continuous	1,50	1,83

Typical load rejection curves

50 Hz - 1500 min-1

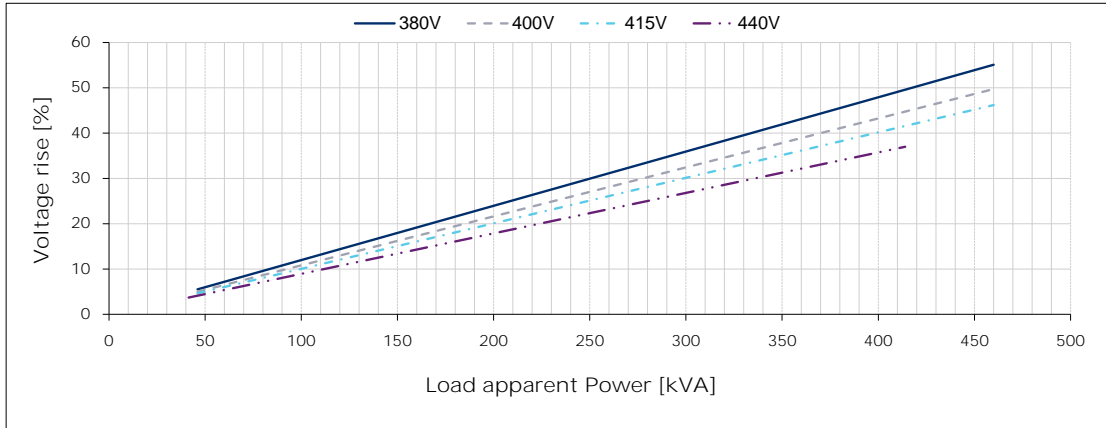

60 Hz - 1800 min-1

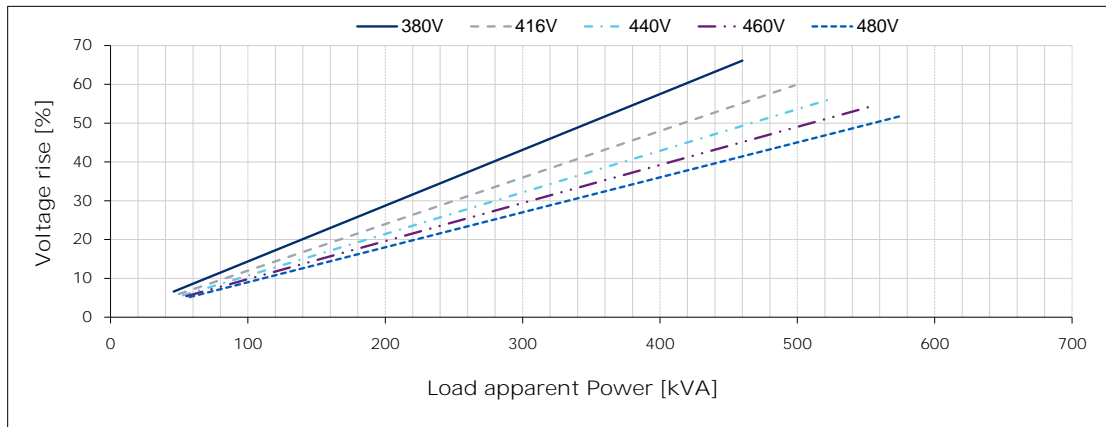

This document is the property of Marelli Motori S.p.A. No part of this document may be copied or reproduced in any way.

The attached information should be considered a guideline for commercial discussion and could be subject to review. Marelli Motori reserves the right to make changes in the data without notice.