

AMBIENT TEMPERATURE	40°C	WINDING DATA									
TEMPERATURE RISE	H	Winding code		MO							
INSULATION CLASS	H	Number of leads		12							
POWER FACTOR	0,8	Winding pitch		2/3							
FREQUENCY	Hz	50				60					
VOLTAGE	Star series	V	380	400	415	440	380	416	440	460	480
	Star parallel		190	200	208	220	190	208	220	230	240
RATING	kVA		300	300	288	270	300	325	344	359	375
	kW		240	240	230	216	240	260	275	287	300
EFFICIENCY (%) @ 0,8 p.f.	4/4		93,4	93,4	93,3	92,5	93,5	93,9	94,0	94,0	93,9
	3/4		94,0	93,9	93,6	92,5	94,1	94,4	94,4	94,4	94,3
	2/4		94,3	93,9	93,4	91,7	94,3	94,4	94,4	94,3	94,1
EFFICIENCY (%) @ 1,0 p.f.	4/4		95,2	95,4	95,4	95,0	95,1	95,4	95,5	95,6	95,7
	3/4		95,7	95,7	95,6	95,0	95,6	95,8	95,9	95,9	95,9
	2/4		95,9	95,7	95,3	94,2	95,7	95,9	95,9	95,8	95,8
STAND-BY RATING (163/27)	kVA		330	330	317	297	330	358	378	395	413
STAND-BY EFFICIENCY (%) @ 0,8 p.f.			93,1	93,2	93,1	92,5	93,3	93,7	93,8	93,8	93,8
SHORT CIRCUIT RATIO (referred to class H rating)			0,65	0,72	0,80	0,96	0,54	0,59	0,63	0,66	0,69
REACTANCES (%) (referred to class H rating)											
Direct axis synchronous	x <sub>d</sub>		264	238	212	177	317	286	271	259	248
Quadrature axis synchronous	x <sub>q</sub>		109	98	88	73	131	118	112	107	103
Direct axis transient	x' <sub>d</sub>		12,8	11,6	10,3	8,6	15,4	13,9	13,1	12,6	12,0
Direct axis subtransient	x'' <sub>d</sub>		9,5	8,6	7,6	6,4	11,4	10,3	9,7	9,3	8,9
Quadrature axis subtransient	x'' <sub>q</sub>		10,4	9,4	8,4	7,0	12,5	11,3	10,7	10,2	9,8
Negative sequence	x <sub>2</sub>		10,0	9,0	8,0	6,7	11,9	10,8	10,2	9,8	9,4
Zero sequence	x <sub>0</sub>		4,5	4,1	3,6	3,0	5,4	4,9	4,6	4,4	4,2

TIME CONSTANTS [s]

Open circuit (T' <sub>do</sub> )	0,939	Subtransient (T'' <sub>d</sub> )	0,008
Transient (T' <sub>d</sub> )	0,096	Armature (T <sub>a</sub> )	0,012

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	Available on double bearing configuration (on request)
N-end bearing/Lubrication	6313 2Z C3 / Prelubricated
Weight [kg]	783
Inertia (J) [kgm <sup>2</sup> ]	2,56
Overspeed [min <sup>-1</sup> ]	2250
Method of cooling	IC 01
Cooling air required [m <sup>3</sup> /s] @ 50/60 Hz	1,7 / 2,1
Degree of protection	IP 23
Type of construction available	B2 (B34 on request)
Direction of rotation	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	0,009
Overloads	10% for 1 hour
3-phase short circuit current	>= 300% (3 I <sub>n</sub> ) with aux. winding or PMG
Voltage regulation accuracy	+/- 0,5 % (@ rated load, balanced and non-distorting, p.f. 0,8)
Radio interference	EN 55011 Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% (at no load)

STANDARDS


IEC 60034-1; BS 4999-5000; NEMA MG 1.32.
--

THREE-PHASE SYNCHRONOUS GENERATOR  
**MXB-E 250 LB 4**


Typical efficiency curves

50 Hz - 1500 min<sup>-1</sup>


380 V

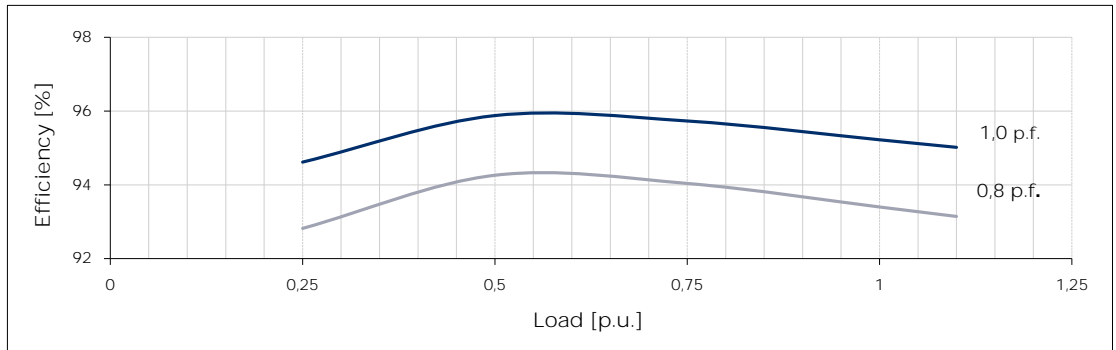


400 V

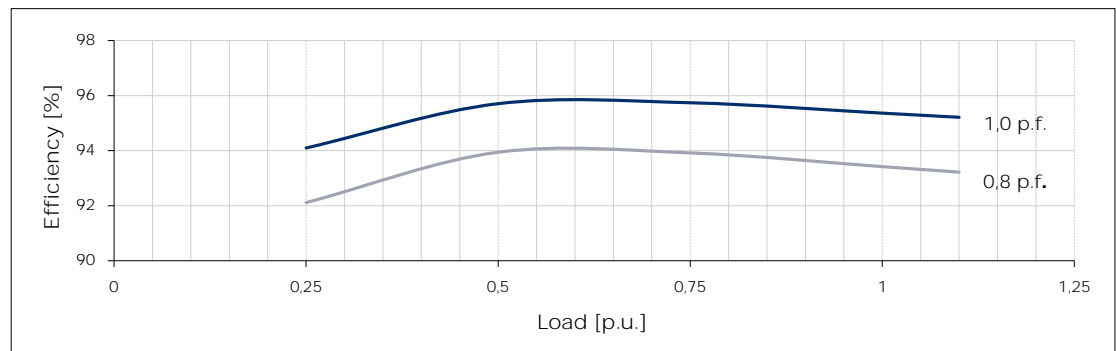

415 V

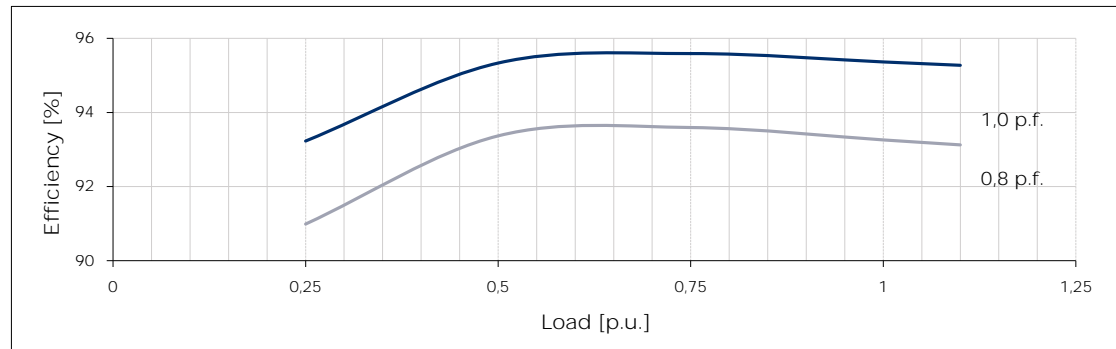


440 V

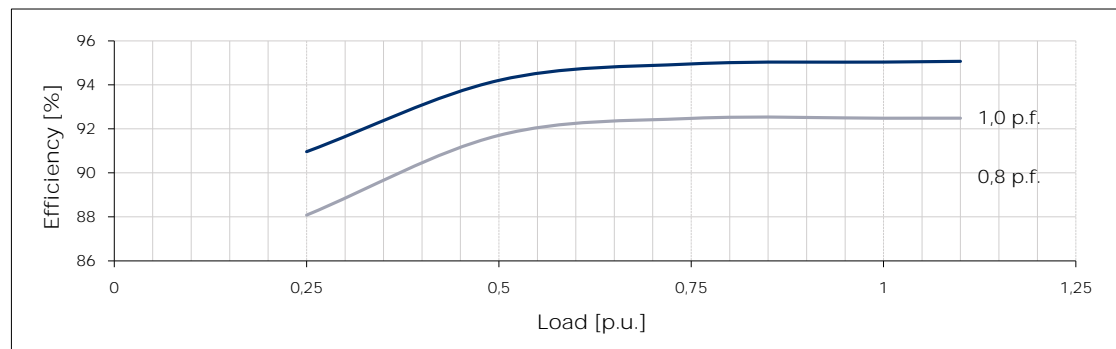


Typical efficiency curves

60 Hz - 1800 min<sup>-1</sup>


380 V

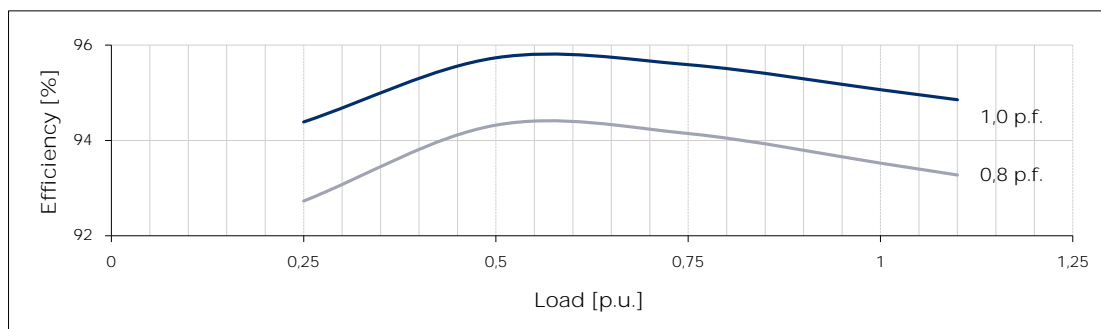


416 V

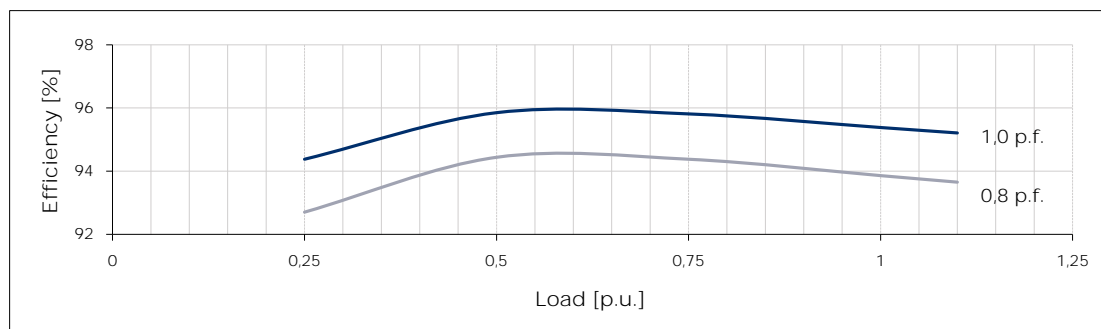


440 V

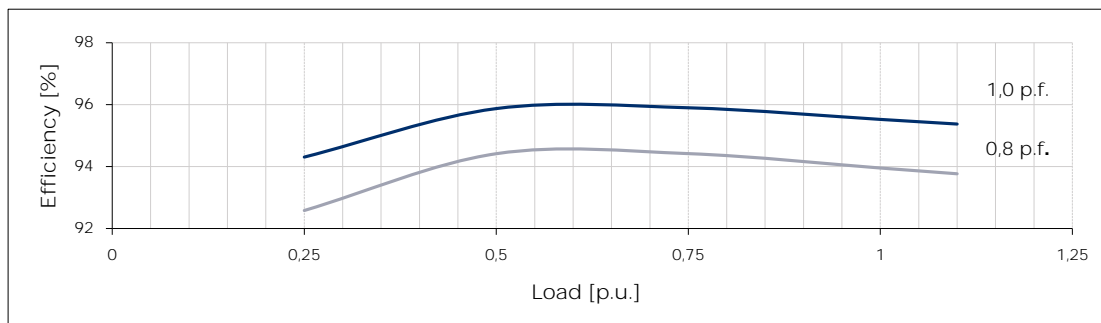

460 V

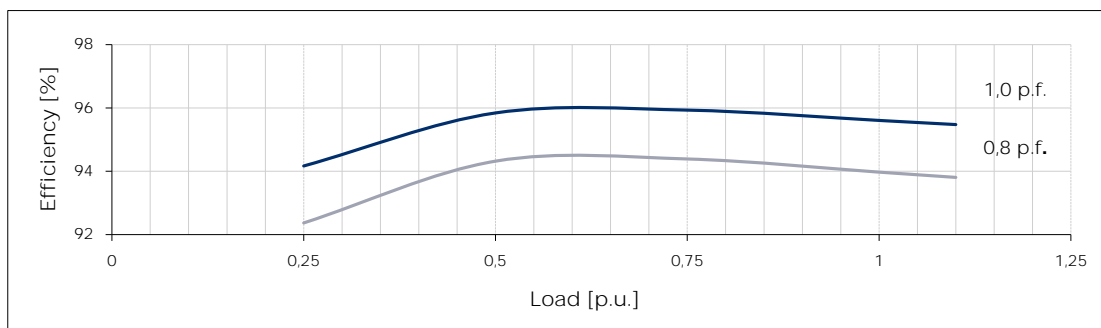

480 V

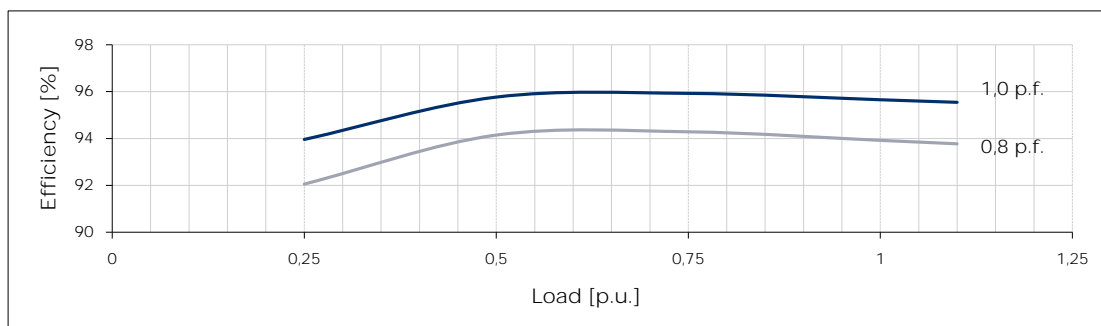




MarelliMotori  
Inspired solutions

# THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 LB 4


Typical voltage DIP curves

50 Hz - 1500 min<sup>-1</sup>


380 V

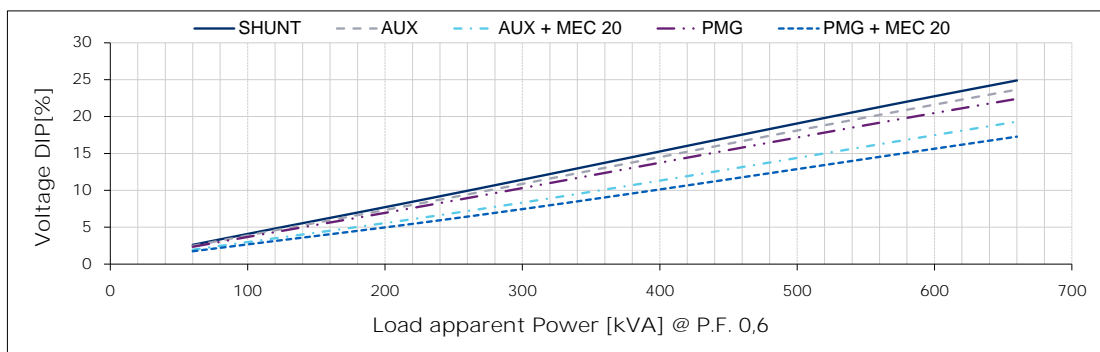


400 V

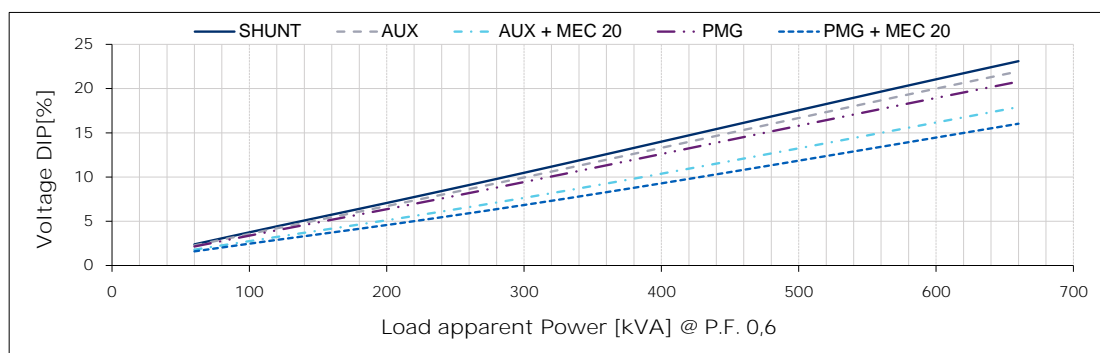

415 V

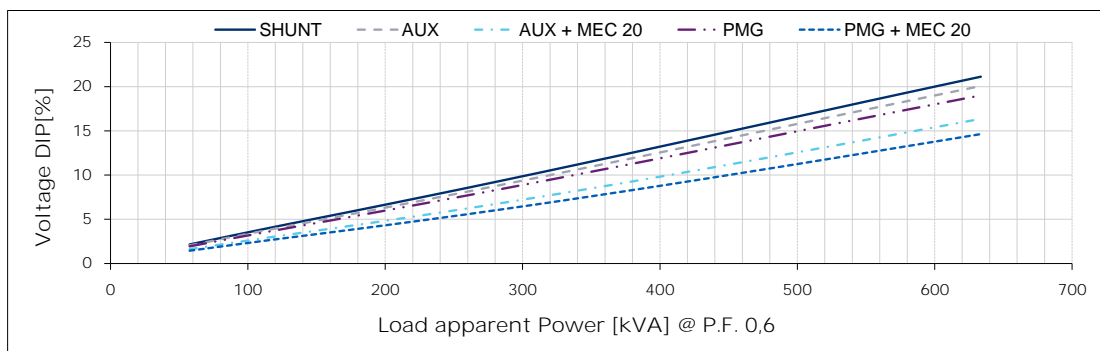

440 V

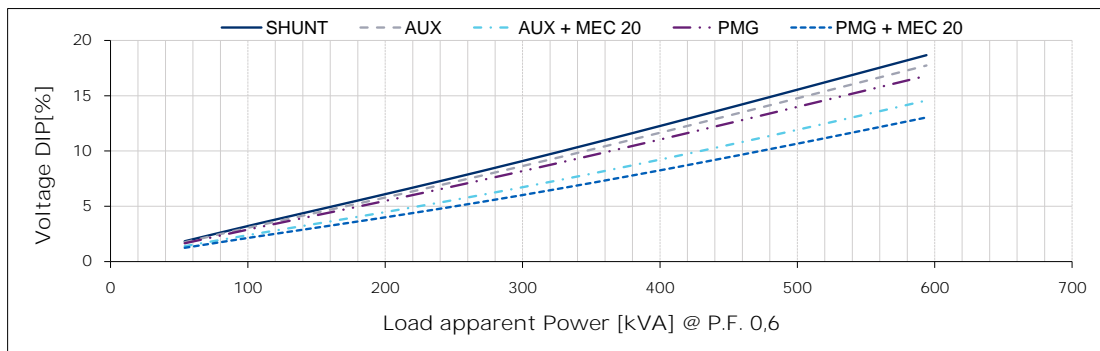




MarelliMotori  
Inspired solutions

# THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 LB 4


Typical voltage DIP curves

60 Hz - 1800 min<sup>-1</sup>


380 V

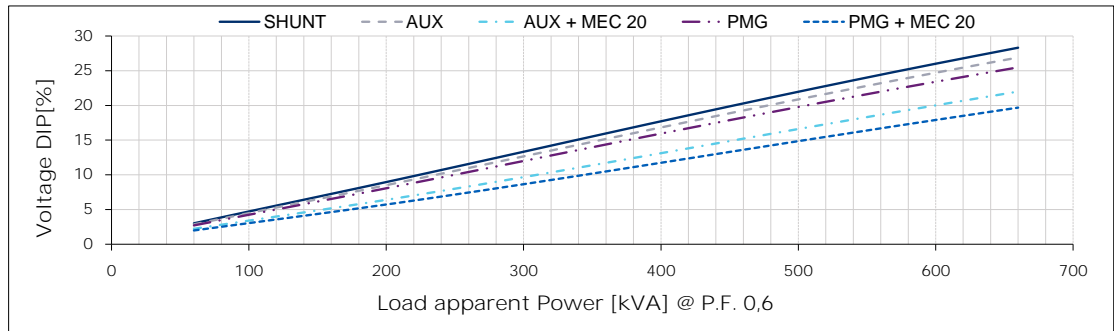


416 V

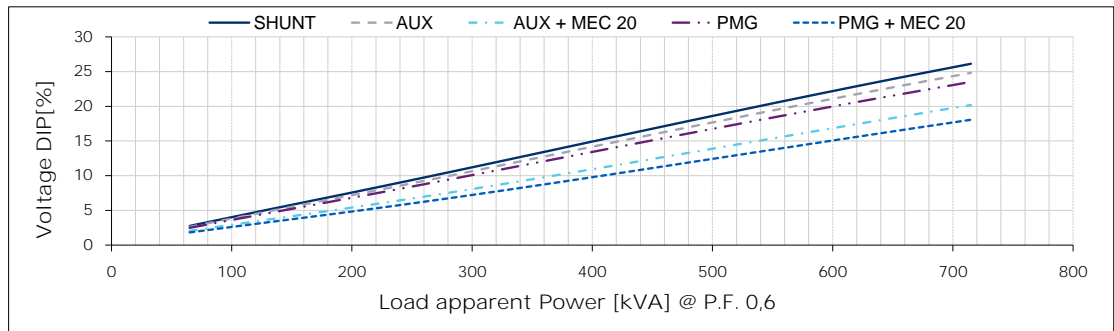


440 V

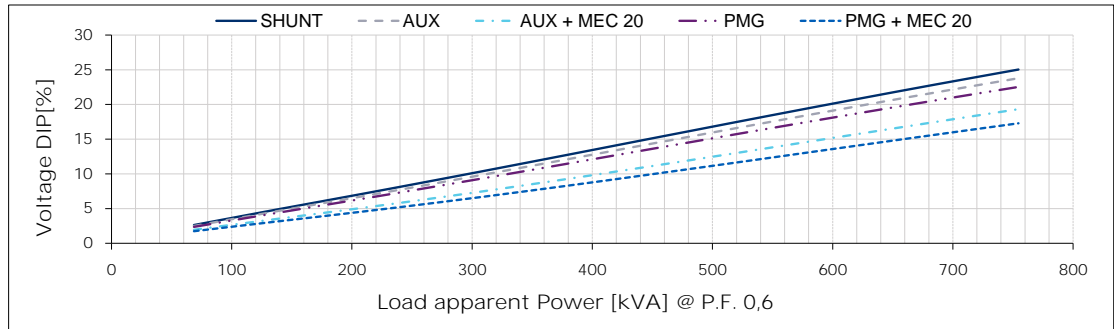

460 V

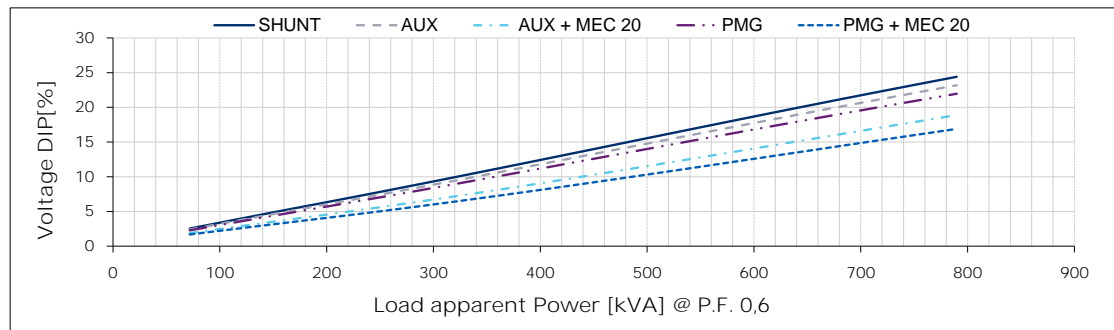

480 V

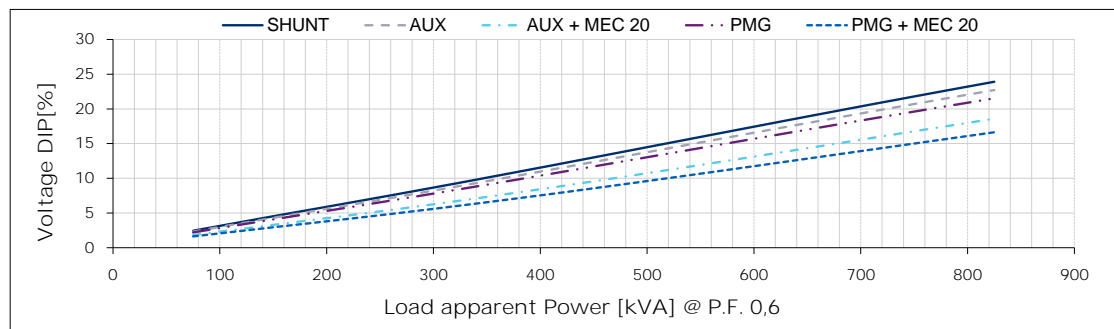

For P.F. different from 0,6 the following simplified formula can be used:  $\Delta V @ P.F. = \Delta V @ 0,6 \cdot \sin(\arccos(P.F.)) / 0,8$

SYN.DS.0074\_ =




MarelliMotori  
Inspired solutions

# THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 LB 4


Typical voltage DIP curves

50 Hz - 1500 min<sup>-1</sup>


380 V

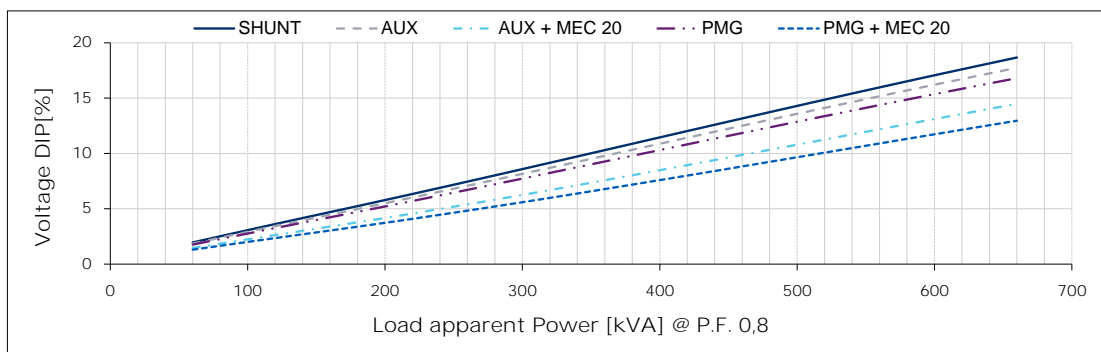


400 V

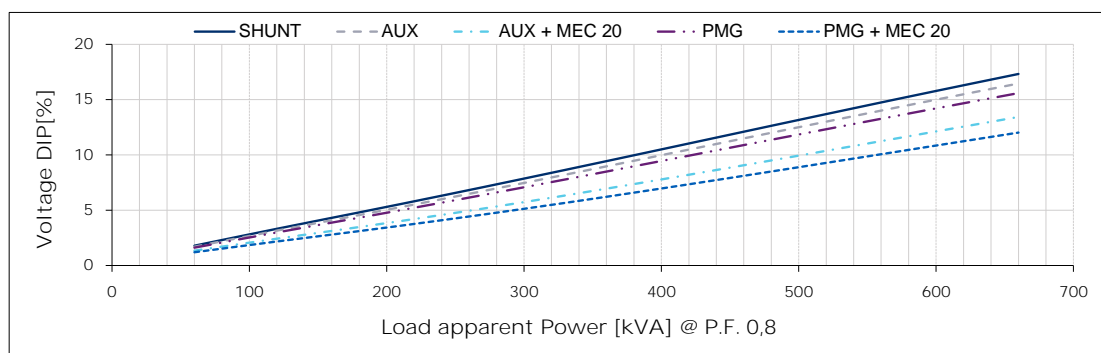

415 V

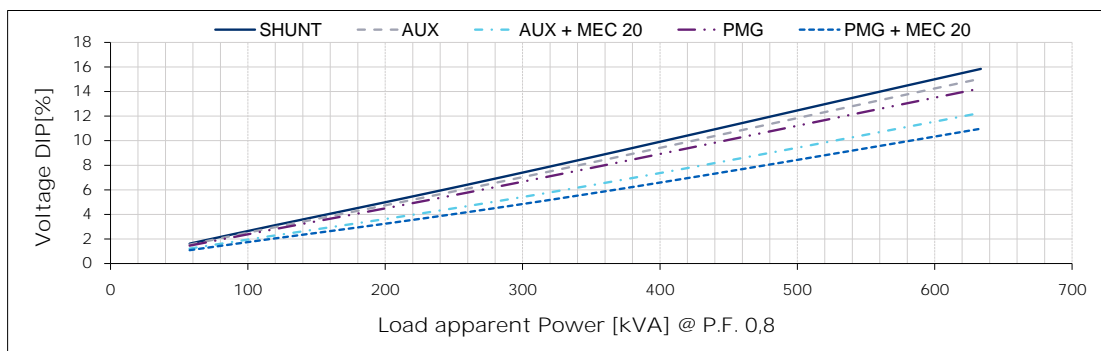

440 V

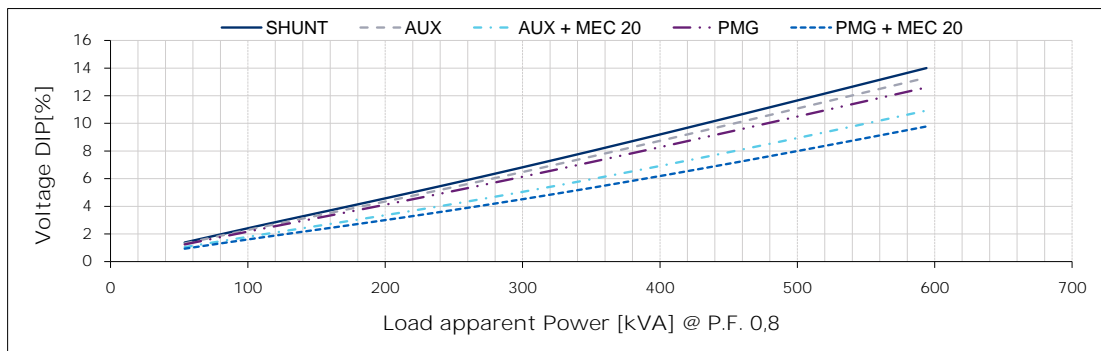




MarelliMotori  
Inspired solutions

# THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 250 LB 4


Typical voltage DIP curves

60 Hz - 1800 min<sup>-1</sup>


380 V

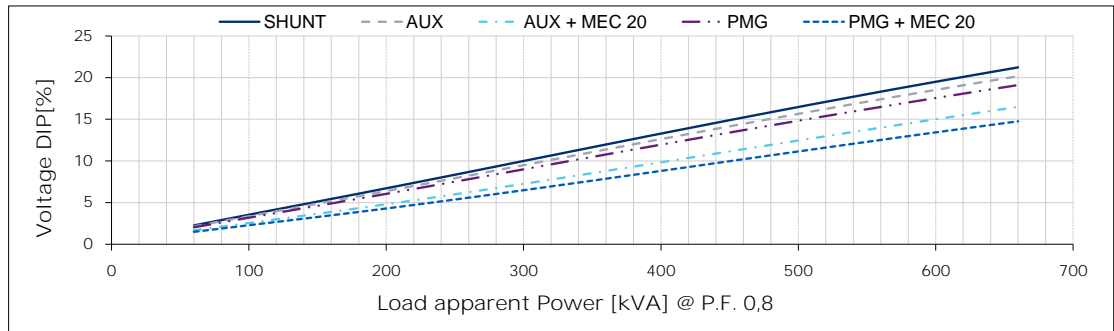


416 V

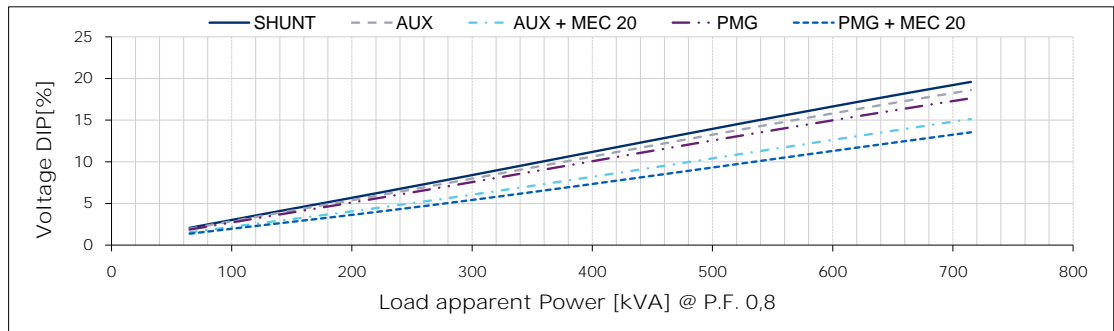


440 V

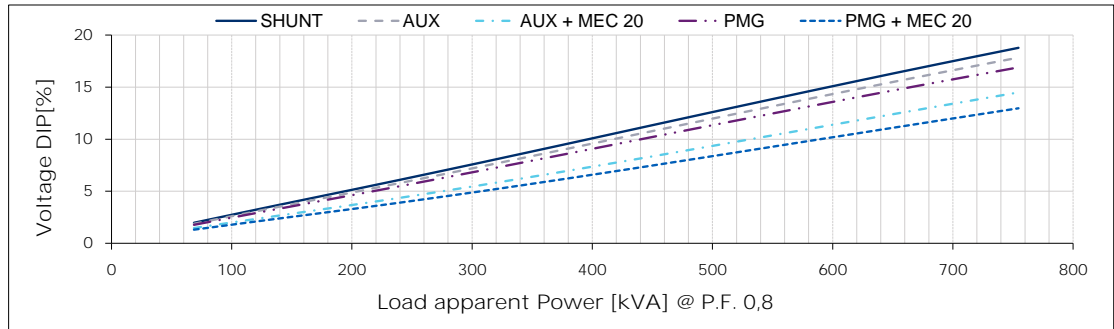

460 V

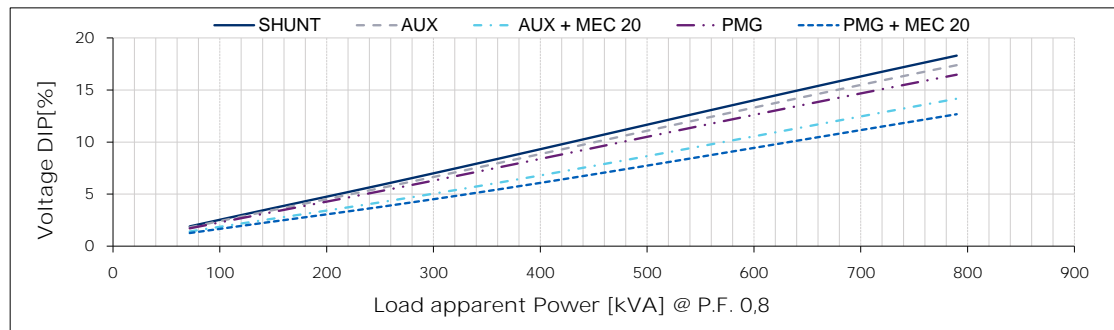

480 V

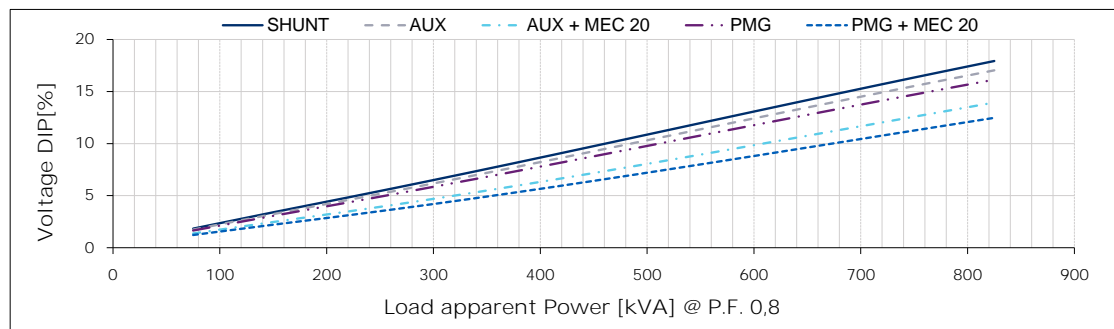


THREE-PHASE SYNCHRONOUS GENERATOR  
**MXB-E 250 LB 4**


Typical 3-phase short circuit decrement curves

50 Hz - 1500 min<sup>-1</sup>


380 V

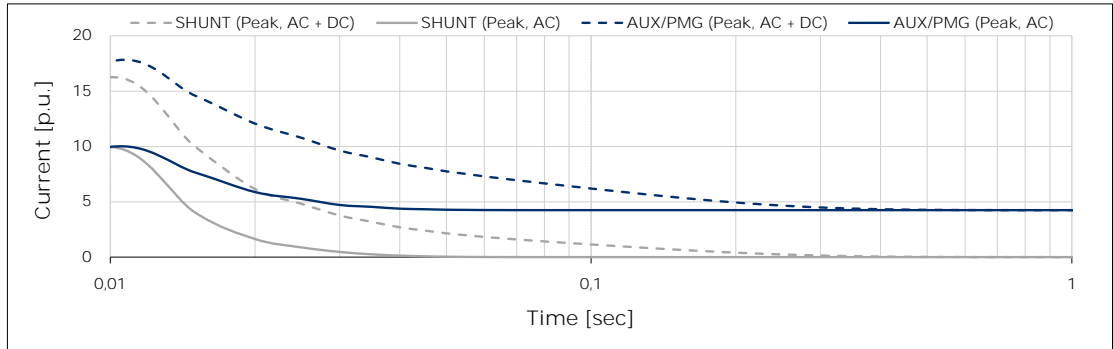


400 V

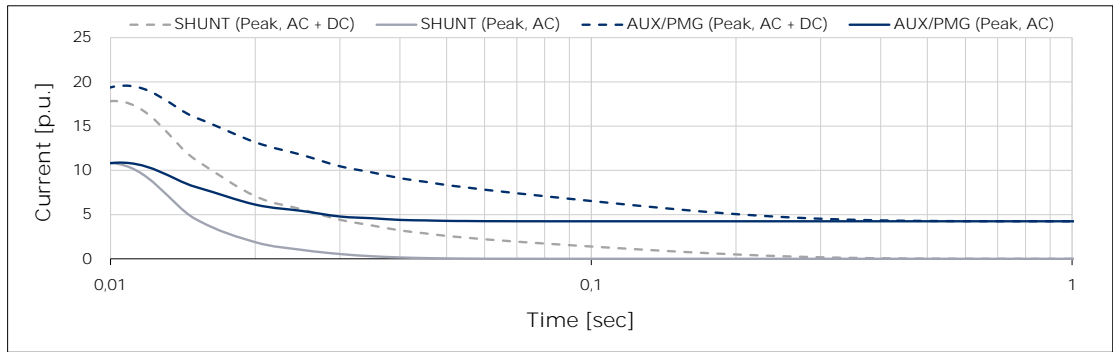

415 V

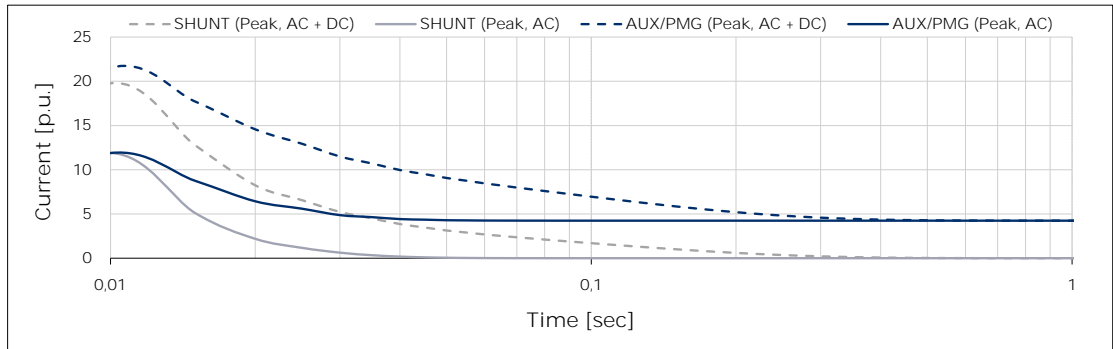

440 V

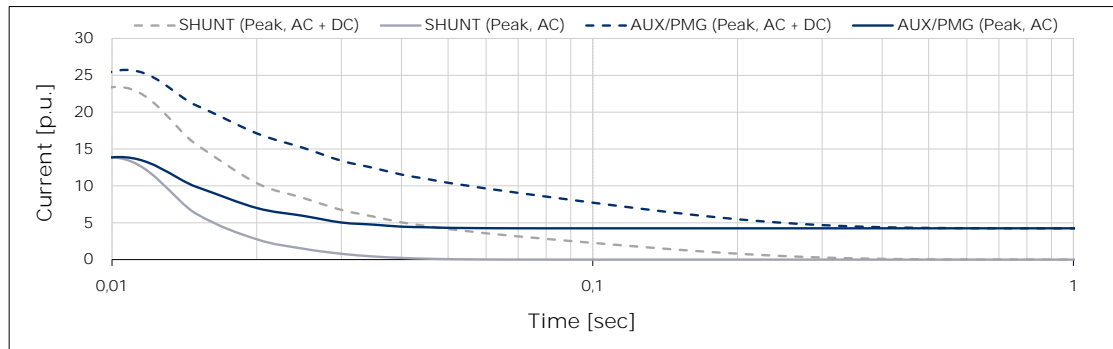




THREE-PHASE SYNCHRONOUS GENERATOR  
**MXB-E 250 LB 4**


Typical 3-phase short circuit decrement curves

60 Hz - 1800 min<sup>-1</sup>


380 V

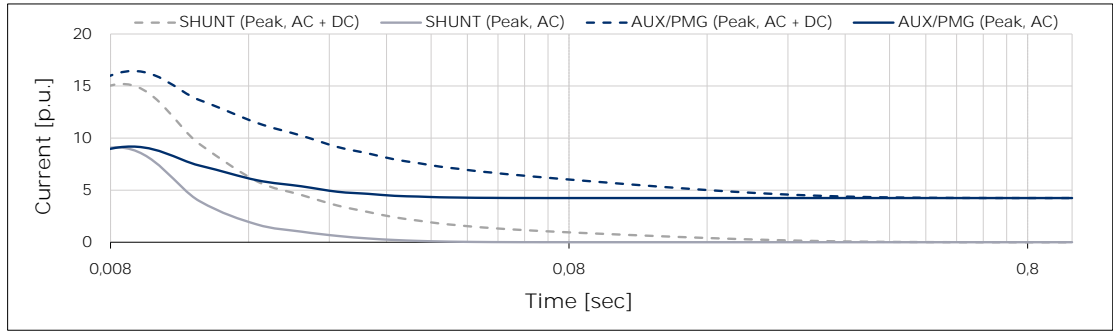


416 V

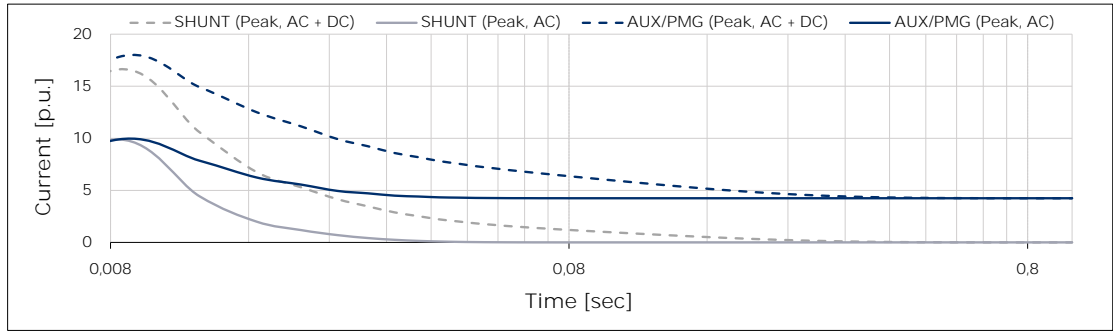


440 V

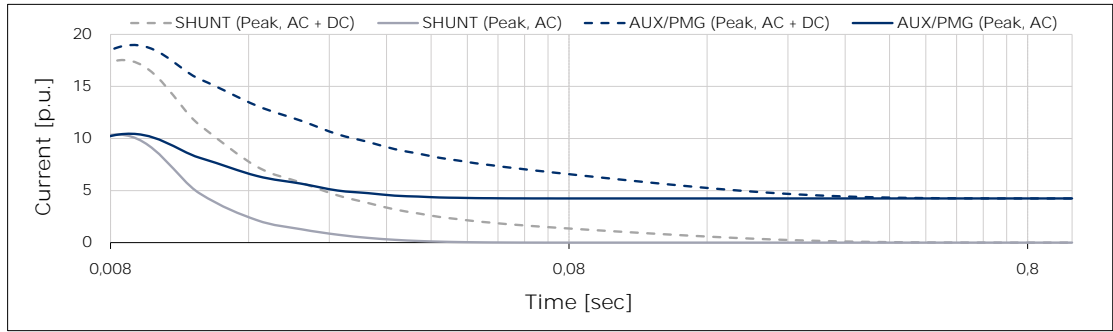

460 V

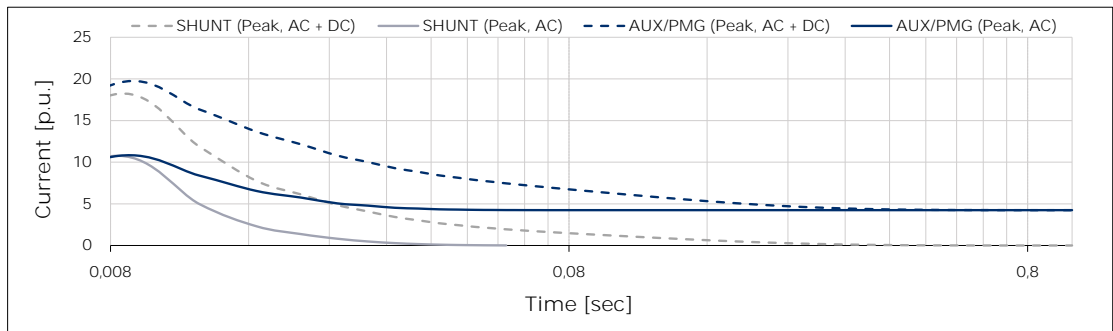

480 V

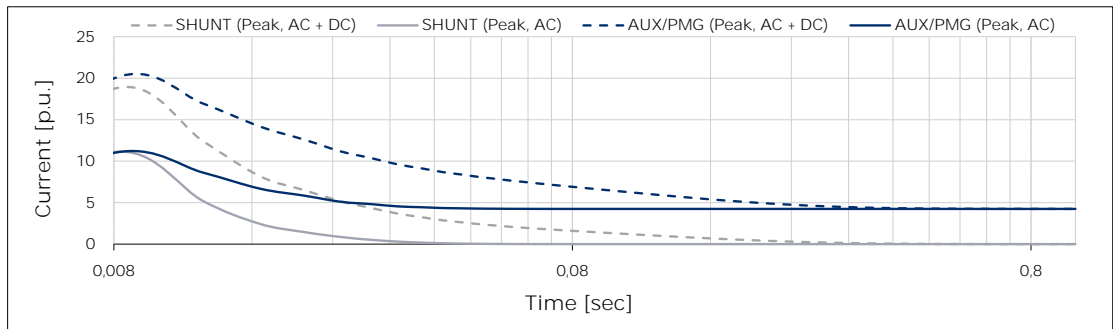


Above curves are based on a three-phase short circuit  
For other type of short circuit use the following multiplication factors

	2 phase	1 phase
Instantaneous (max)	0,83	1,05
Continuous	1,50	1,83


SYN.DS.0074\_ =

Typical load rejection curves

50 Hz - 1500 min-1

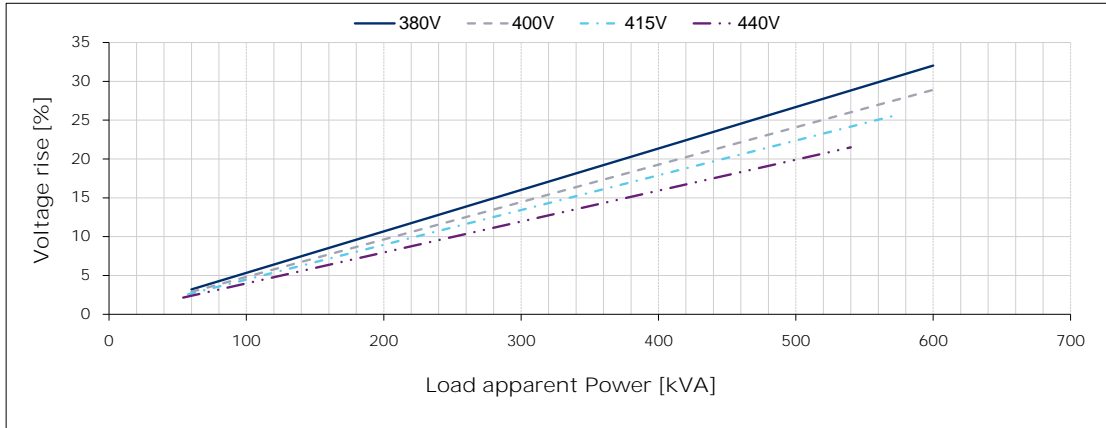

60 Hz - 1800 min-1

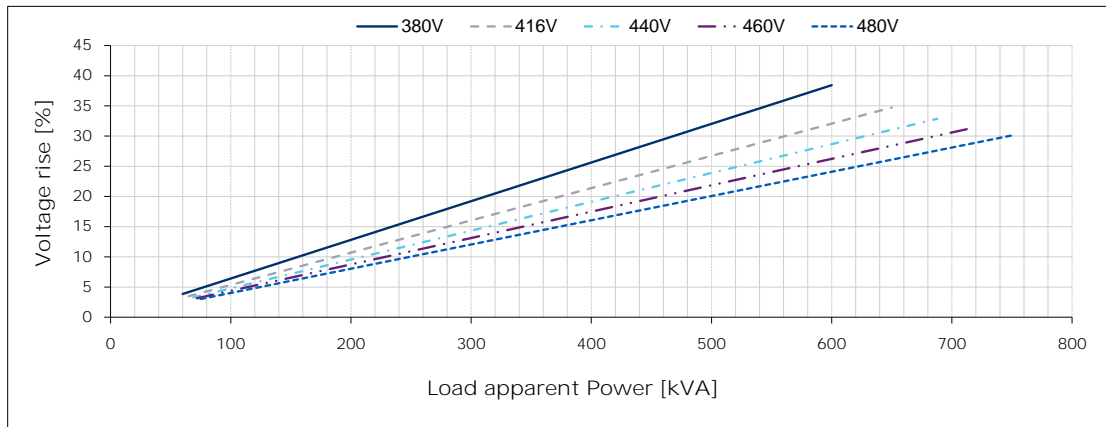

This document is the property of Marelli Motori S.p.A. No part of this document may be copied or reproduced in any way.

The attached information should be considered a guideline for commercial discussion and could be subject to review. Marelli Motori reserves the right to make changes in the data without notice.