

AMBIENT TEMPERATURE	40°C	WINDING DATA									
TEMPERATURE RISE	H	Winding code		MO							
INSULATION CLASS	H	Number of leads		12							
POWER FACTOR	0,8	Winding pitch		2/3							
FREQUENCY	Hz	50				60					
VOLTAGE	Star series	V	380	400	415	440	380	416	440	460	480
	Star parallel		190	200	208	220	190	208	220	230	240
RATING	kVA		19,0	20,0	20,0	19,0	20,0	21,7	22,9	24,0	25,0
	kW		15,2	16,0	16,0	15,2	16,0	17,3	18,3	19,2	20,0
EFFICIENCY (%) @ 0,8 p.f.	4/4		85,3	85,4	85,6	85,5	85,2	86,1	86,4	86,6	86,8
	3/4		87,1	87,1	87,1	86,7	87,0	87,7	88,0	88,1	88,1
	2/4		88,3	88,2	88,0	87,0	88,2	88,6	88,8	88,9	88,8
EFFICIENCY (%) @ 1,0 p.f.	4/4		89,1	89,4	89,7	90,1	88,6	89,3	89,7	90,0	90,3
	3/4		90,6	90,8	90,9	90,9	90,1	90,7	91,1	91,3	91,4
	2/4		91,6	91,6	91,5	90,9	91,2	91,6	91,8	91,9	91,9
STAND-BY RATING (163/27)	kVA		20,9	22,0	22,0	20,9	22,0	23,8	25,2	26,4	27,5
STAND-BY EFFICIENCY (%) @ 0,8 p.f.			84,6	84,7	84,9	85,0	84,5	85,4	85,8	86,0	86,2
SHORT CIRCUIT RATIO (referred to class H rating)			0,49	0,52	0,56	0,66	0,39	0,43	0,46	0,48	0,50
REACTANCES (%) (referred to class H rating)											
Direct axis synchronous	x _d		283	268	249	211	357	323	305	292	280
Quadrature axis synchronous	x _q		122	116	108	91	154	139	132	126	121
Direct axis transient	x' _d		19,5	18,5	17,2	14,5	24,6	22,3	21,0	20,1	19,3
Direct axis subtransient	x'' _d		9,7	9,3	8,6	7,3	12,3	11,1	10,5	10,1	9,6
Quadrature axis subtransient	x'' _q		10,7	10,2	9,5	8,0	13,5	12,2	11,6	11,1	10,6
Negative sequence	x ₂		10,2	9,7	9,0	7,6	12,9	11,7	11,0	10,6	10,1
Zero sequence	x ₀		8,5	8,1	7,5	6,4	10,8	9,7	9,2	8,8	8,4

TIME CONSTANTS [s]

Open circuit (T' _{do})	0,476	Subtransient (T'' _d)	0,008
Transient (T' _d)	0,050	Armature (T _a)	0,008

MECHANICAL CHARACTERISTICS

D-end bearing/Lubrication	-
N-end bearing/Lubrication	6207 2RS C3 / Prelubricated
Weight [kg]	116
Inertia (J) [kgm ²]	0,14
Overspeed [min ⁻¹]	2250
Method of cooling	IC 01
Cooling air required [m ³ /s] @ 50/60 Hz	0,11 / 0,13
Degree of protection	IP 23
Type of construction available	B2
Direction of rotation	CW

OTHER DATA

Phase resistance [Ω] @ 20 °C - Star series	0,414
Overloads	10% for 1 hour
3-phase short circuit current	>= 300% (3 I _n) with aux. winding or PMG
Voltage regulation accuracy	+/- 0,5 % (@ rated load, balanced and non-distorting, p.f. 0,8)
Radio interference	EN 55011 Class B Group 1
Wave form THF	< 2%
Total harmonic content	< 2% (at no load)

STANDARDS


IEC 60034-1; BS 4999-5000; NEMA MG 1.32.
--

THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 160 LA 4


Typical efficiency curves

50 Hz - 1500 min⁻¹


380 V

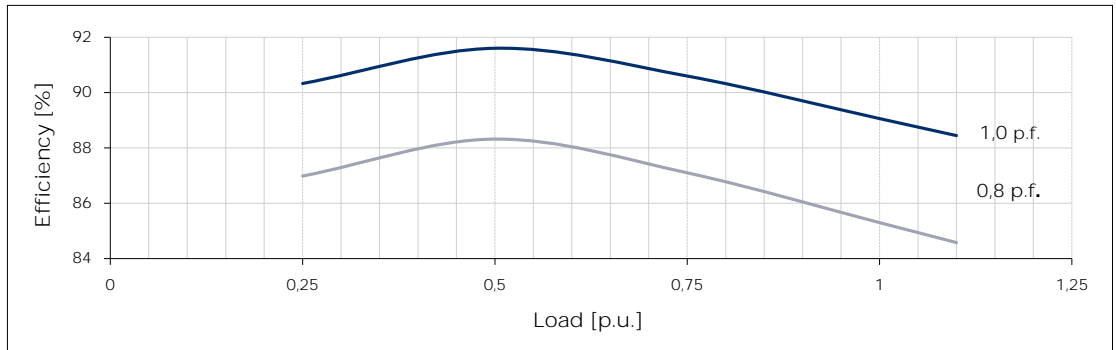


400 V

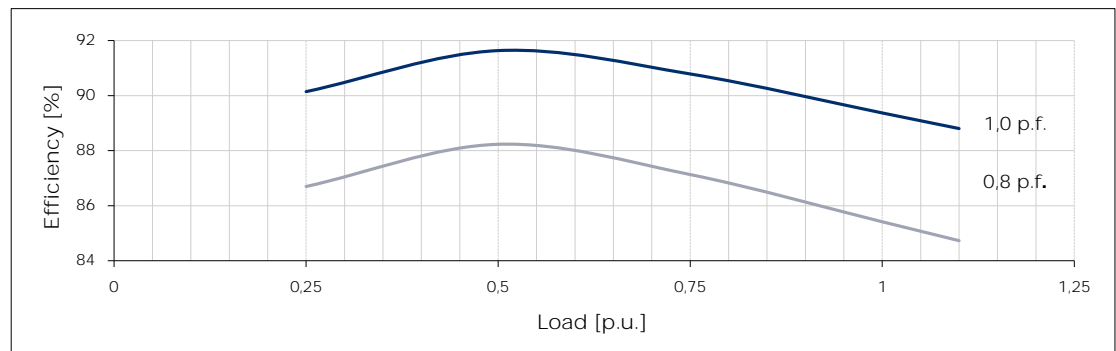

415 V

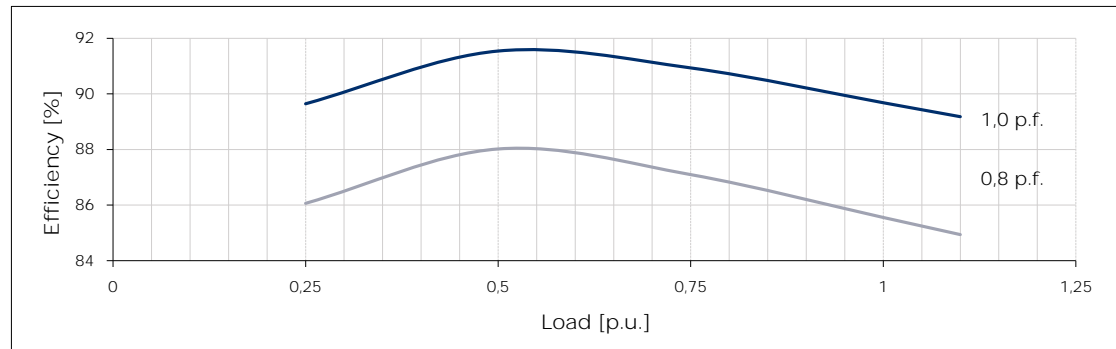


440 V

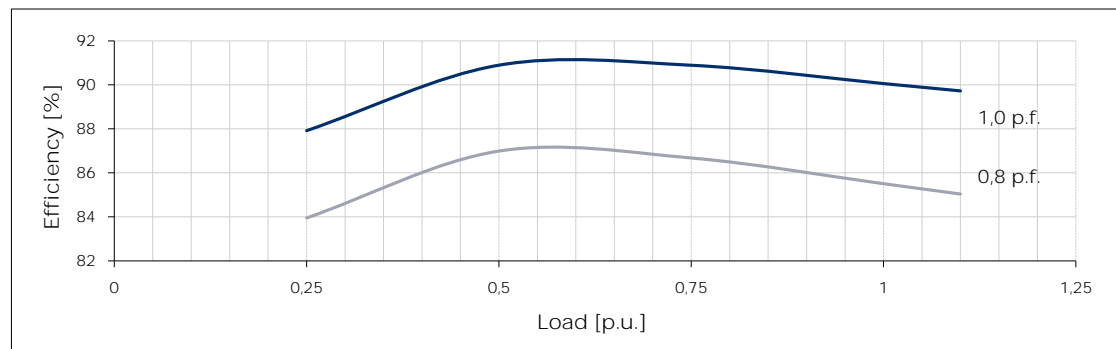

THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 160 LA 4

Typical efficiency curves

60 Hz - 1800 min⁻¹

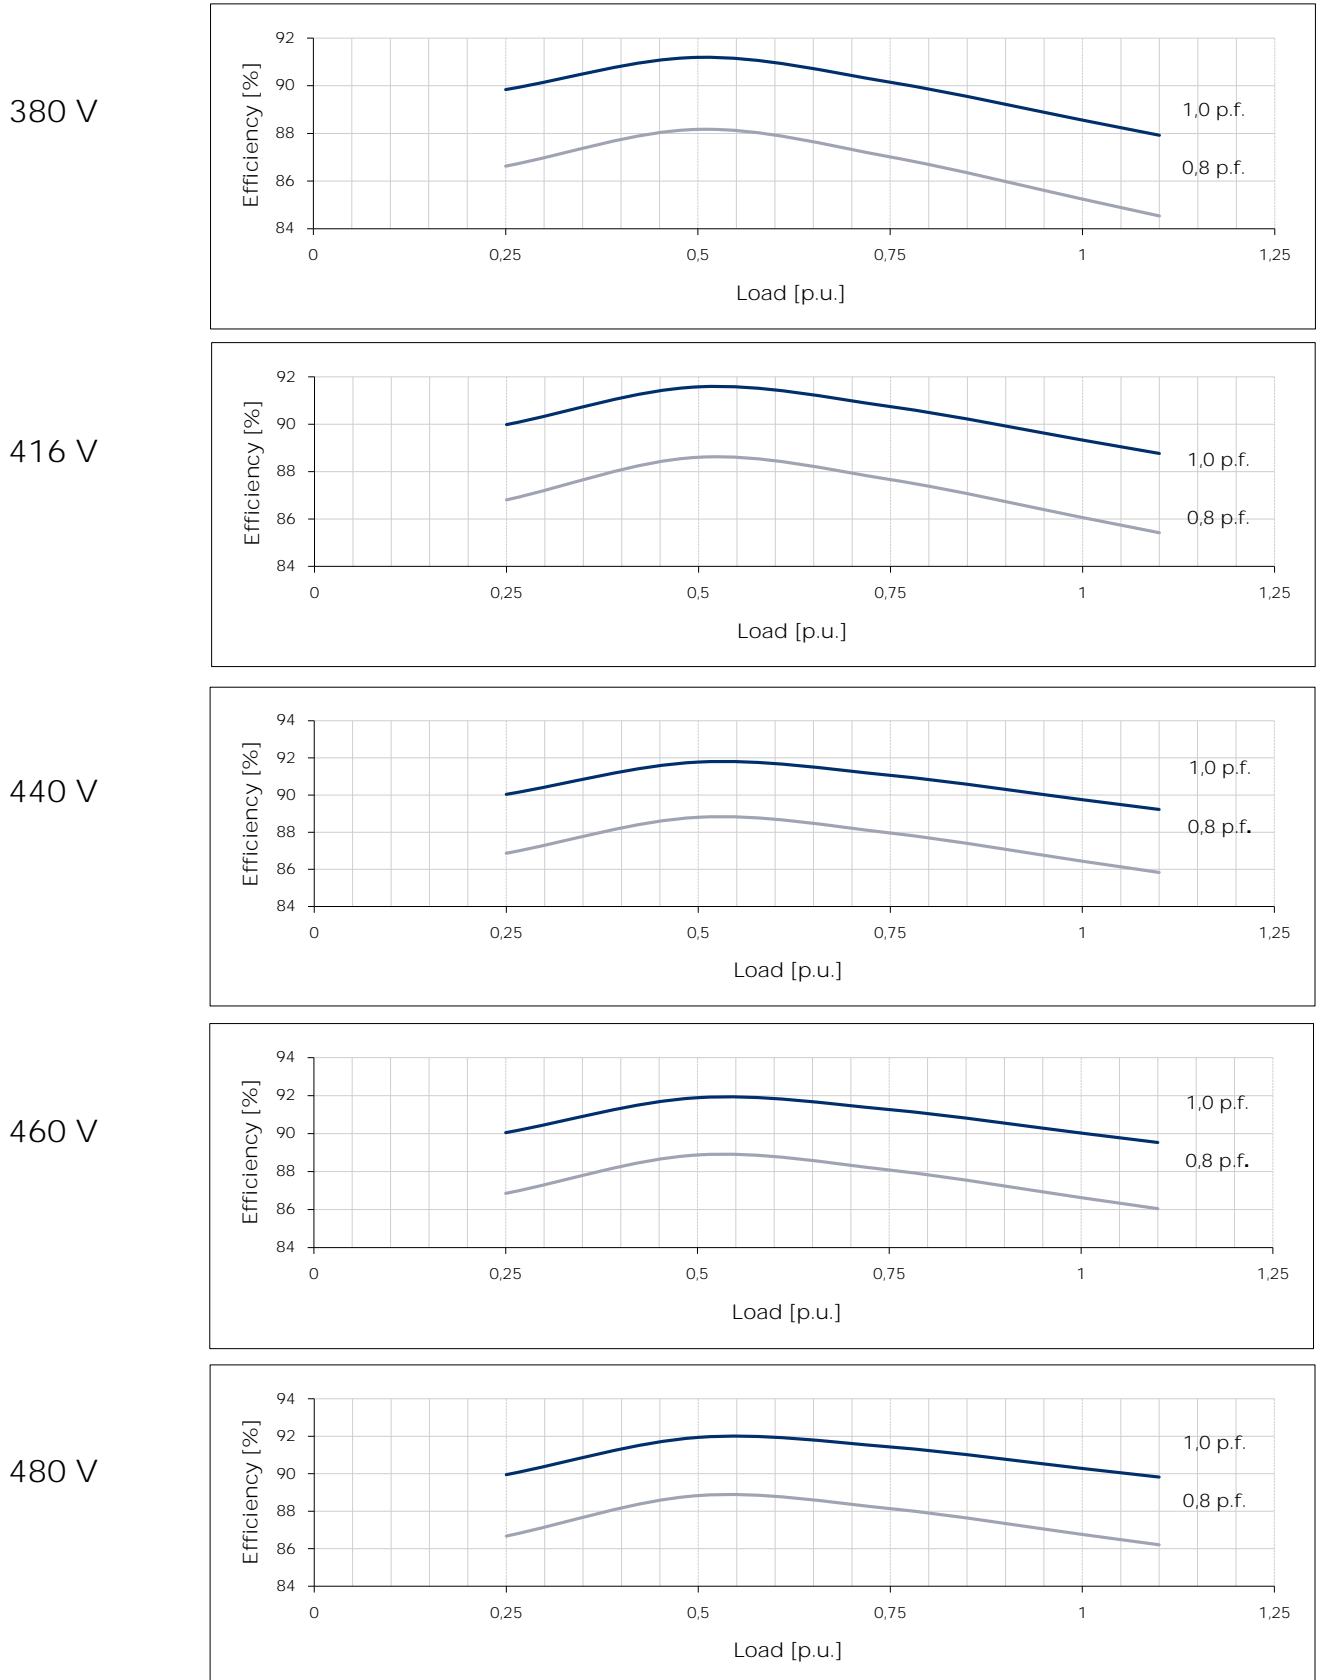




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 160 LA 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

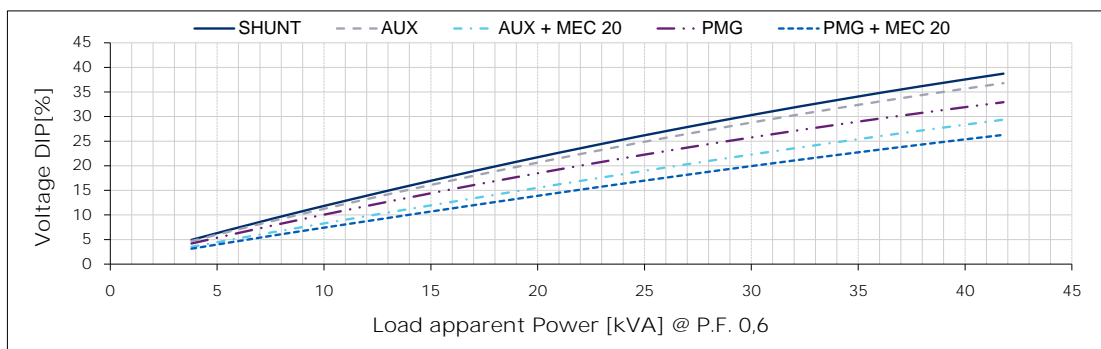


400 V

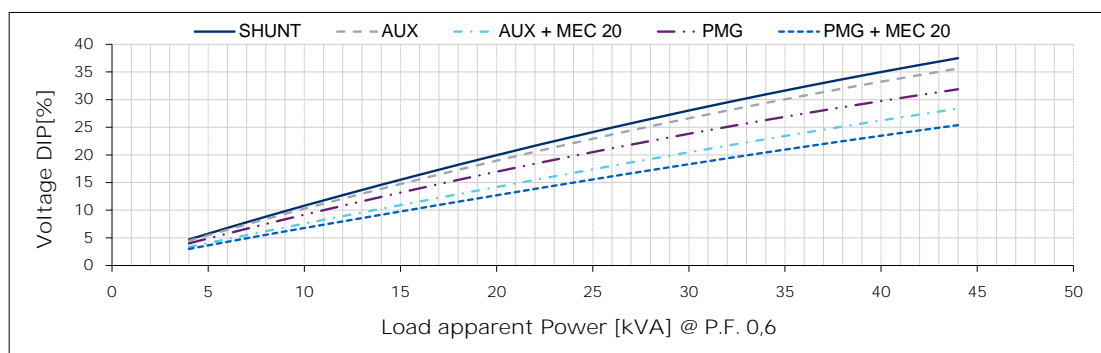

415 V

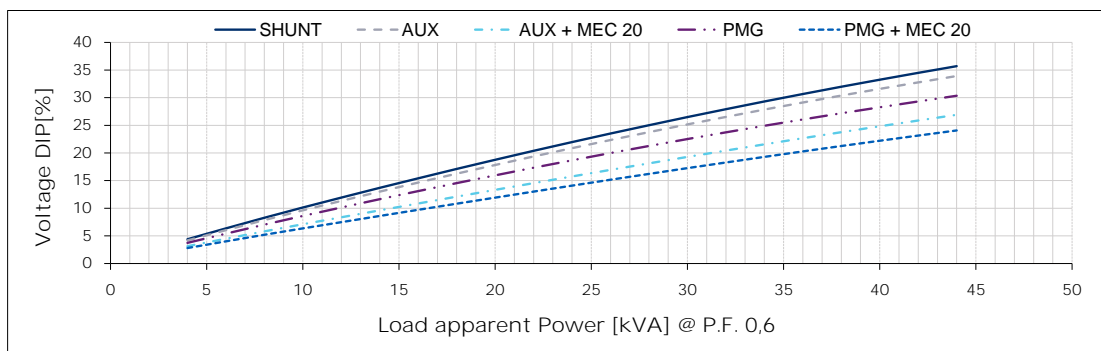

440 V

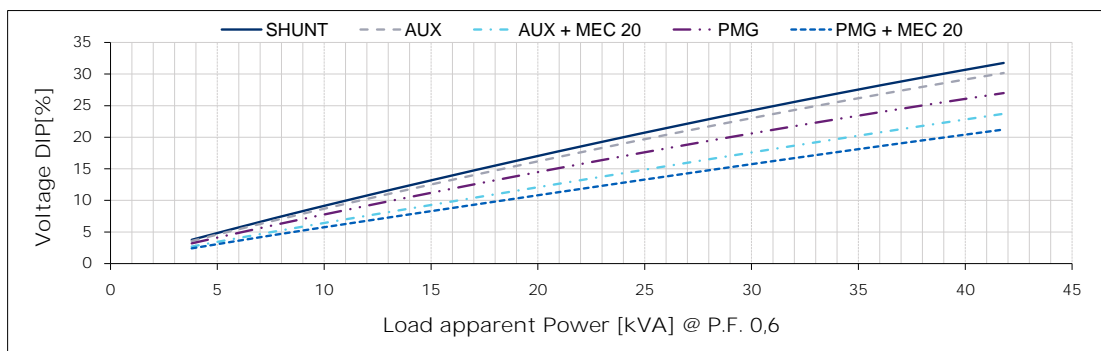




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 160 LA 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

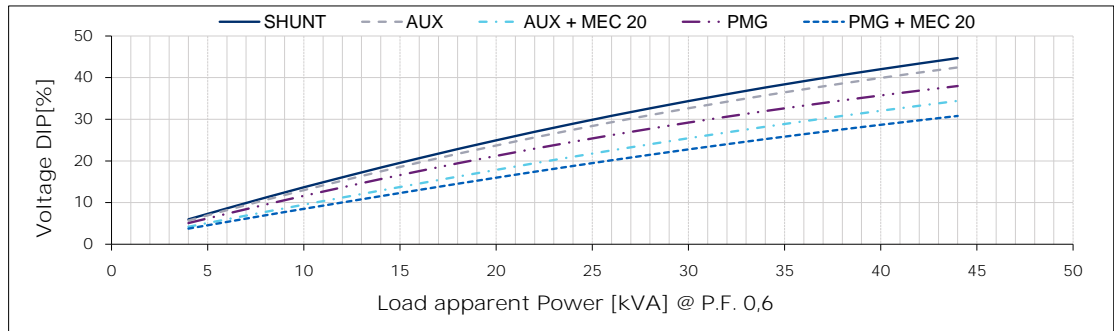


416 V

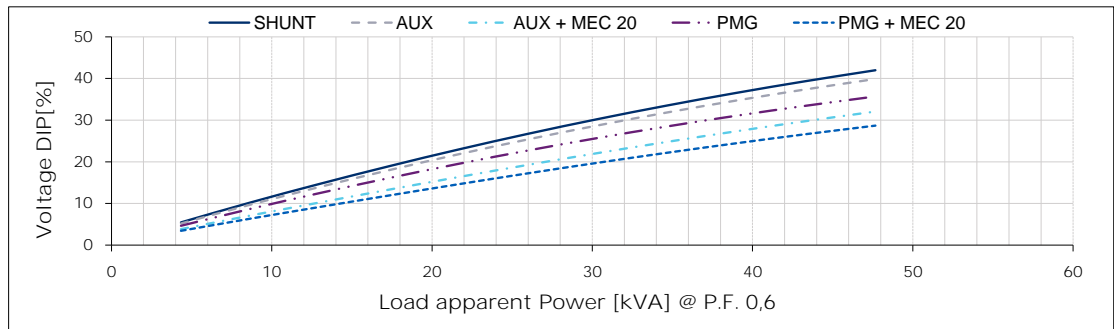


440 V

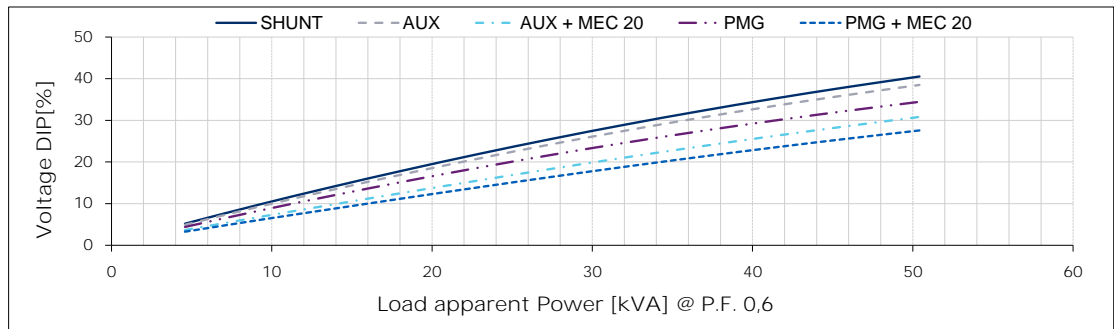

460 V

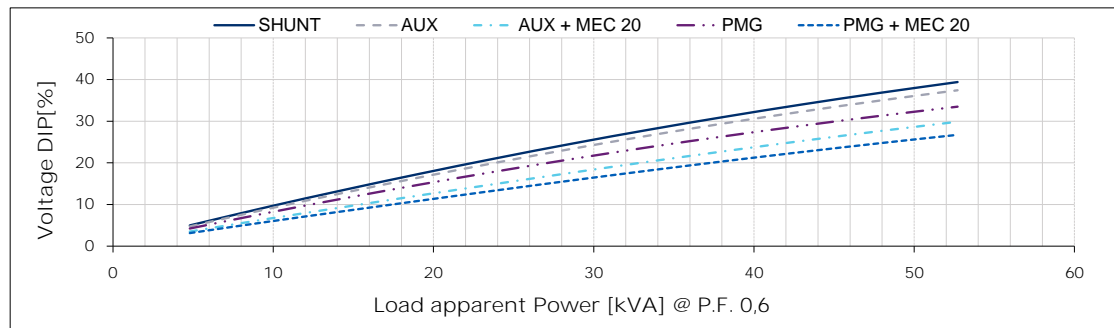

480 V

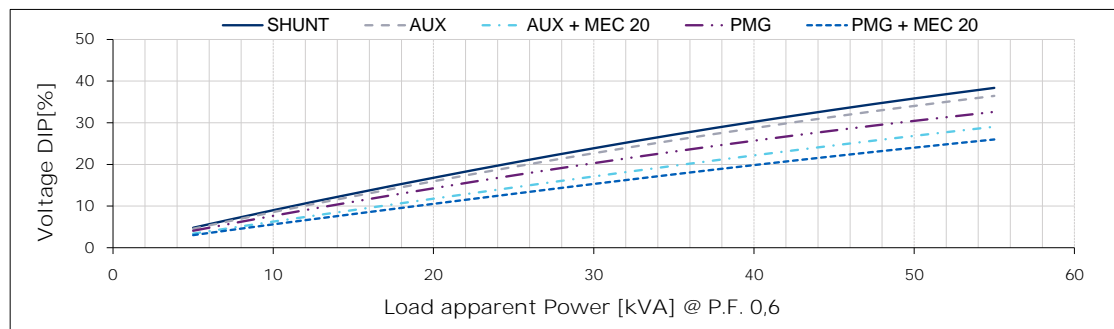

For P.F. different from 0,6 the following simplified formula can be used: $\Delta V @ P.F. = \Delta V @ 0,6 \cdot \sin(\arccos(P.F.))/0,8$




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 160 LA 4


Typical voltage DIP curves

50 Hz - 1500 min⁻¹


380 V

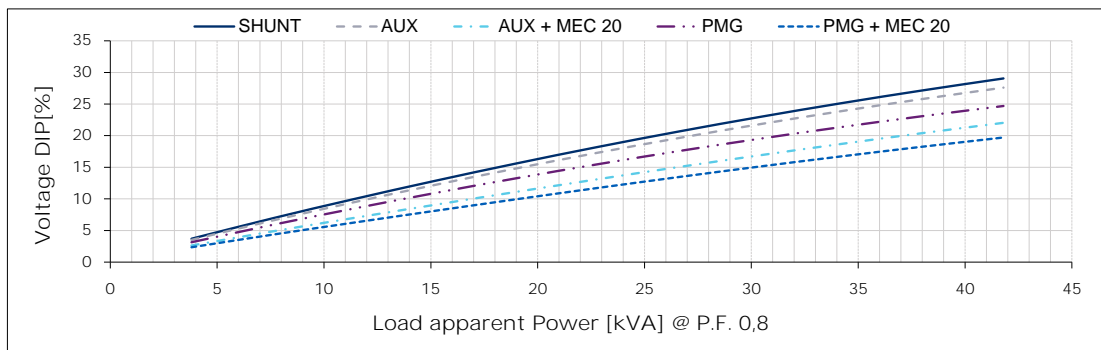


400 V

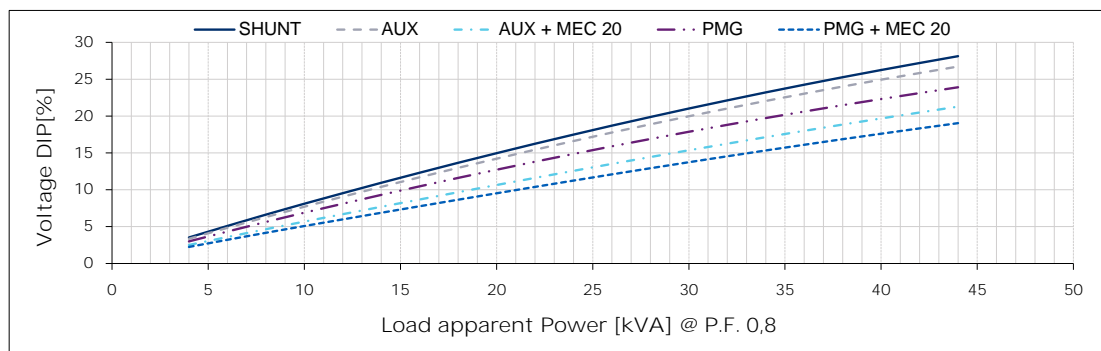

415 V

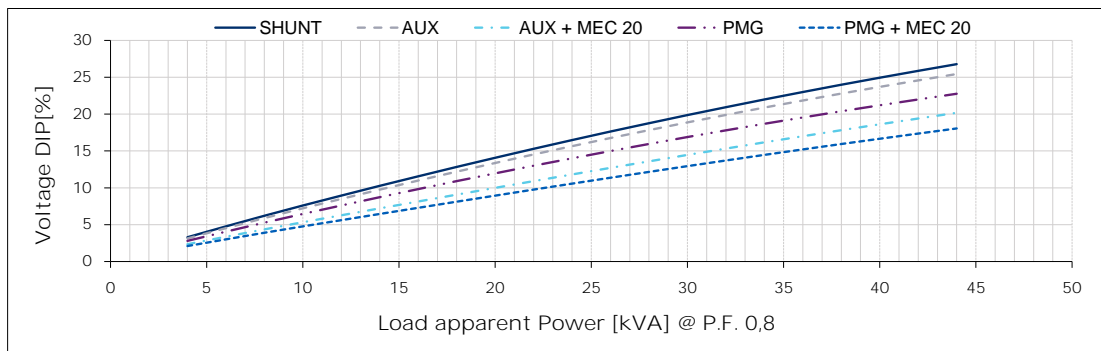

440 V

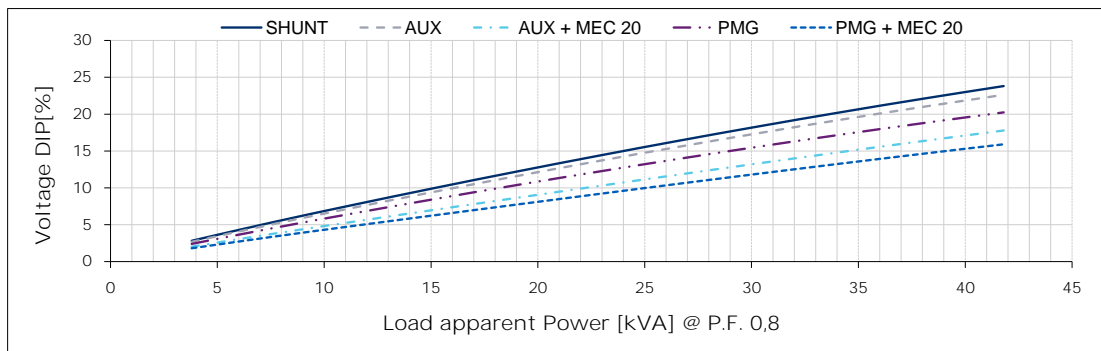




MarelliMotori
Inspired solutions

THREE-PHASE SYNCHRONOUS GENERATOR MXB-E 160 LA 4


Typical voltage DIP curves

60 Hz - 1800 min⁻¹


380 V

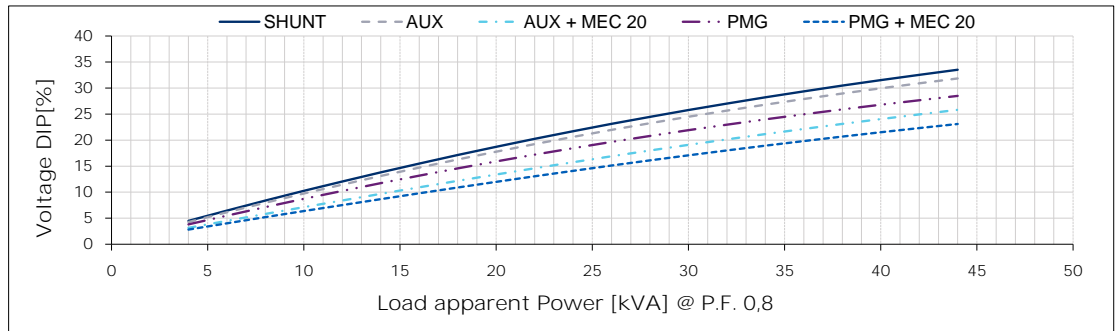


416 V

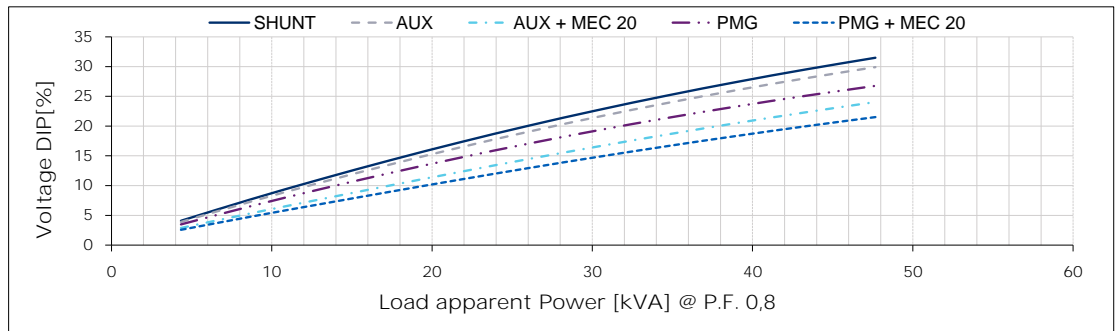


440 V

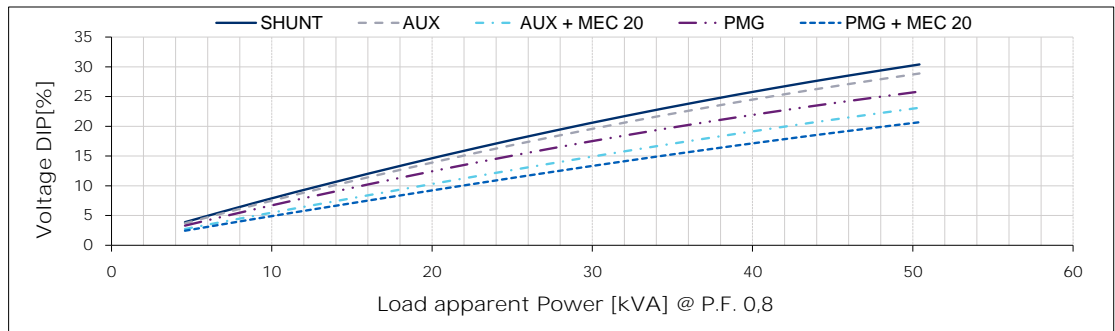

460 V

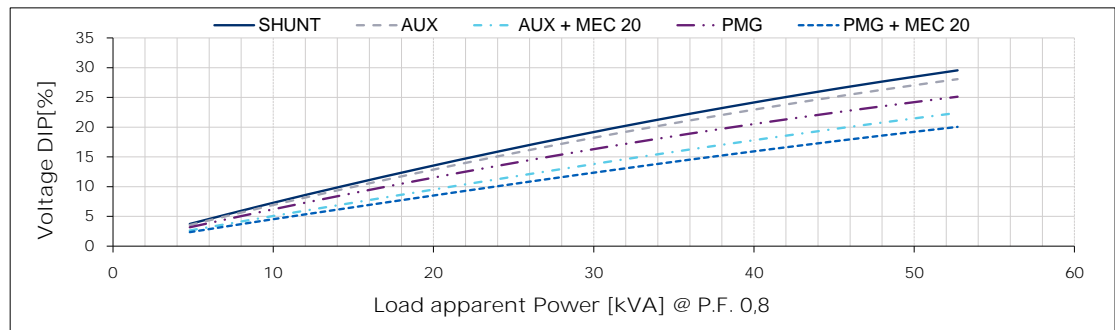

480 V

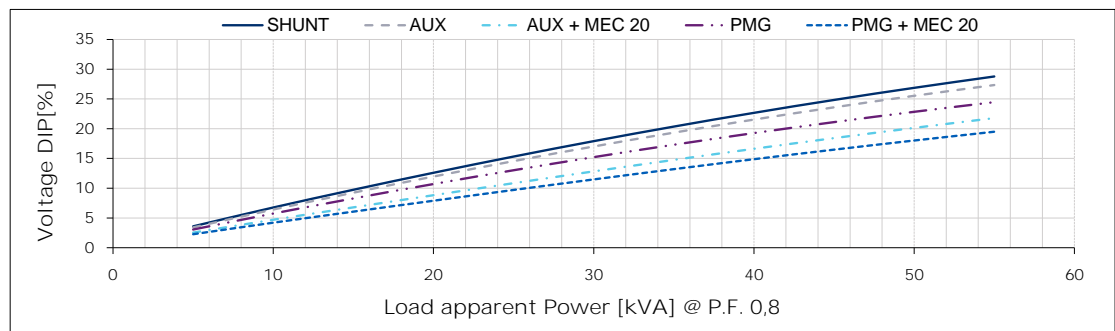


THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 160 LA 4


Typical 3-phase short circuit decrement curves

50 Hz - 1500 min⁻¹


380 V

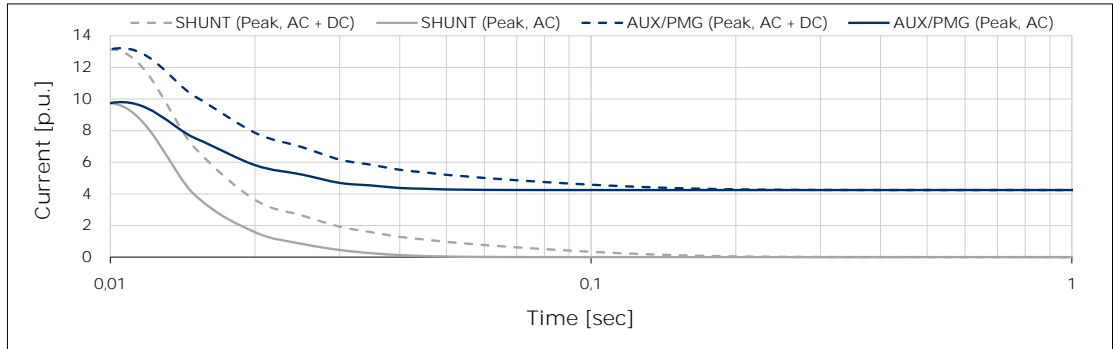


400 V

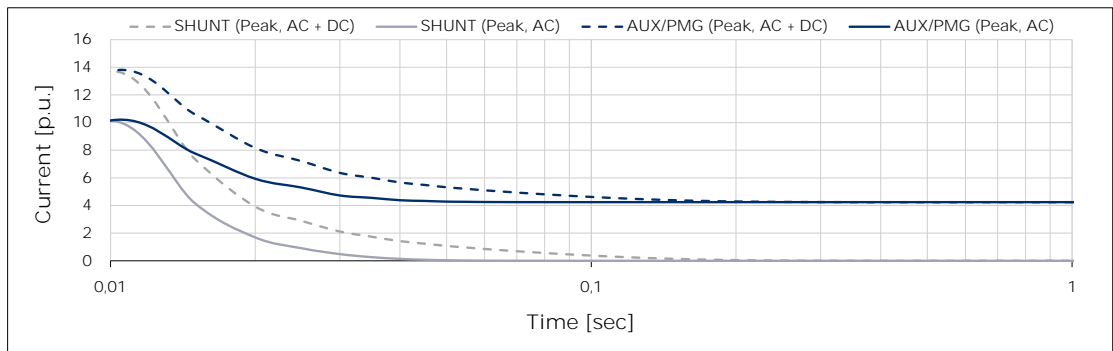

415 V

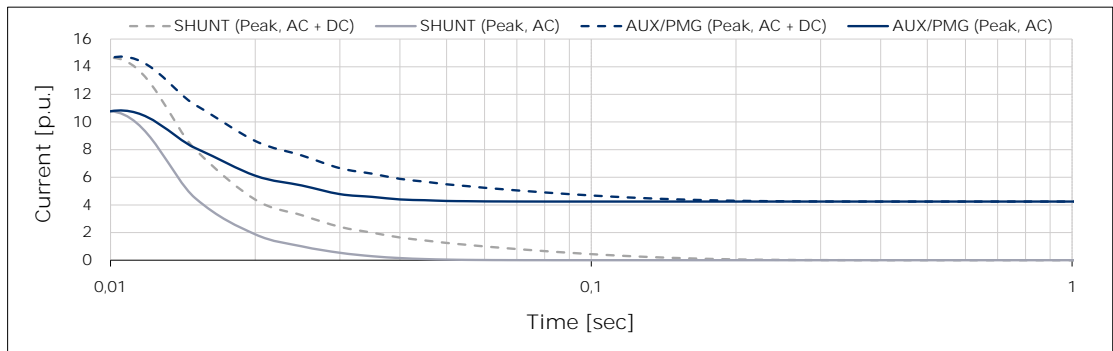

440 V

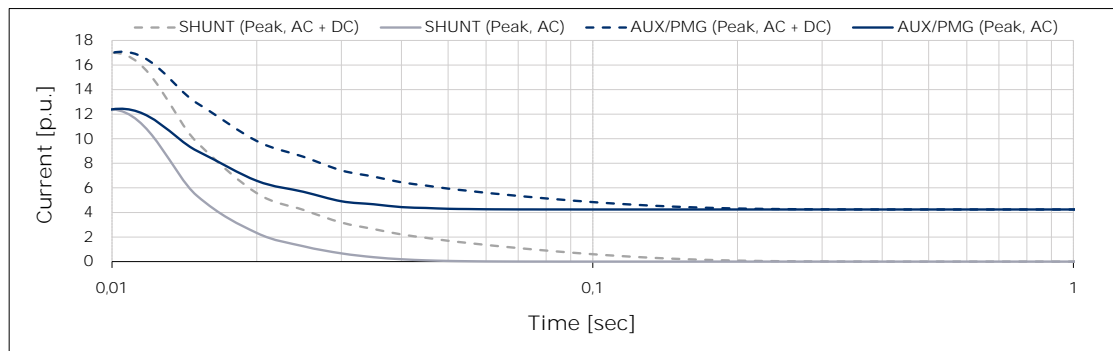


THREE-PHASE SYNCHRONOUS GENERATOR
MXB-E 160 LA 4


Typical 3-phase short circuit decrement curves

60 Hz - 1800 min⁻¹


380 V

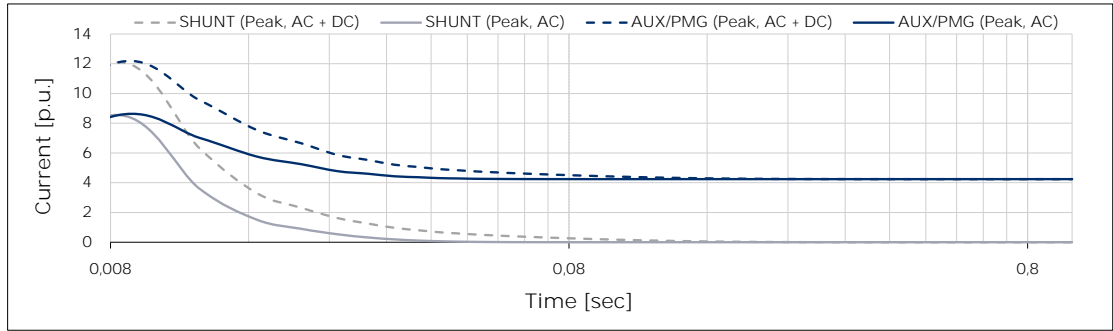


416 V

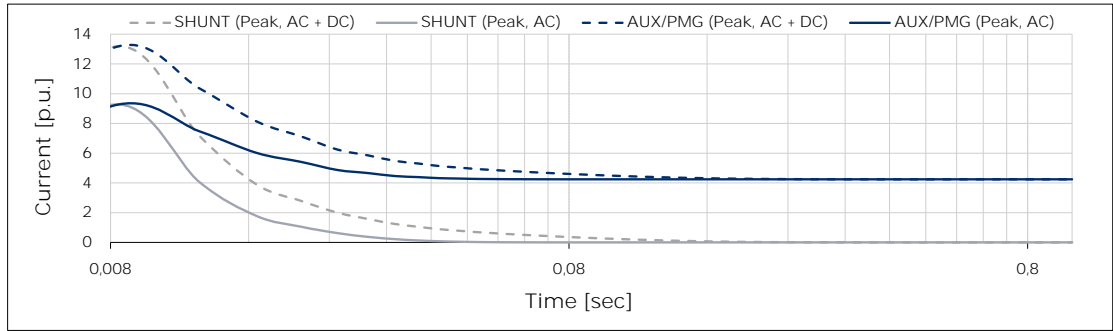


440 V

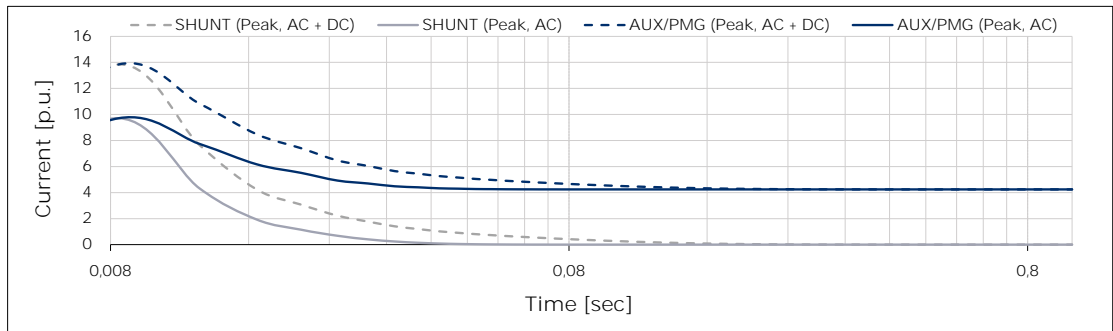

460 V

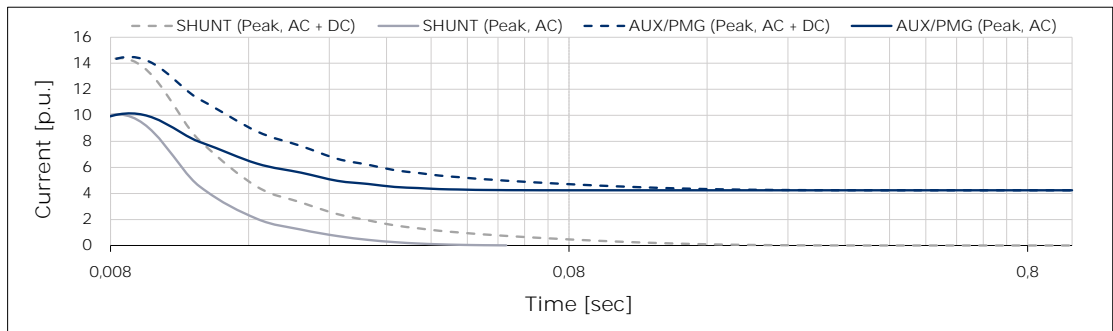

480 V

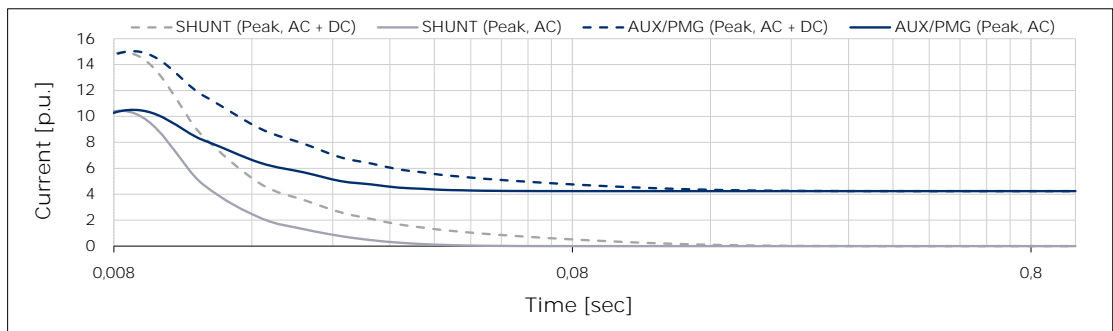


Above curves are based on a three-phase short circuit
For other type of short circuit use the following multiplication factors

	2 phase	1 phase
Instantaneous (max)	0,97	1,18
Continuous	1,50	1,83


SYN.DS.0054_ =

Typical load rejection curves

50 Hz - 1500 min-1

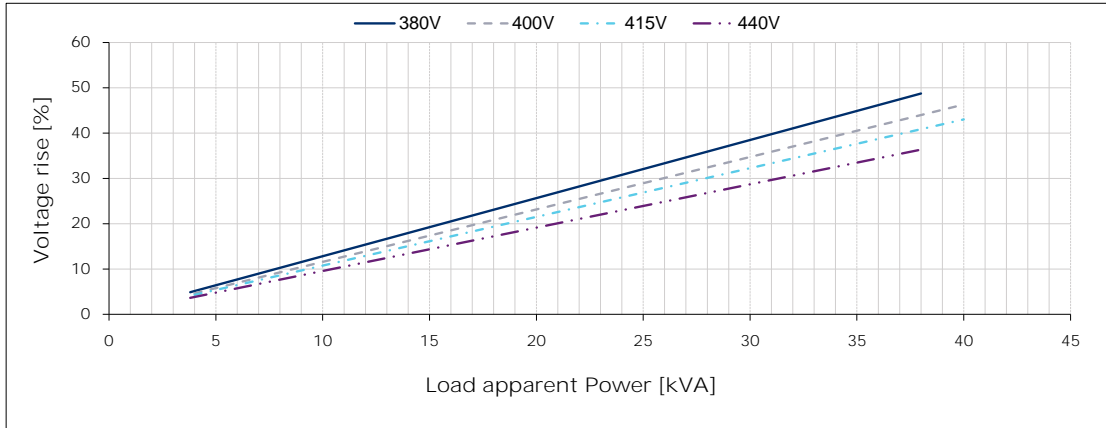

60 Hz - 1800 min-1

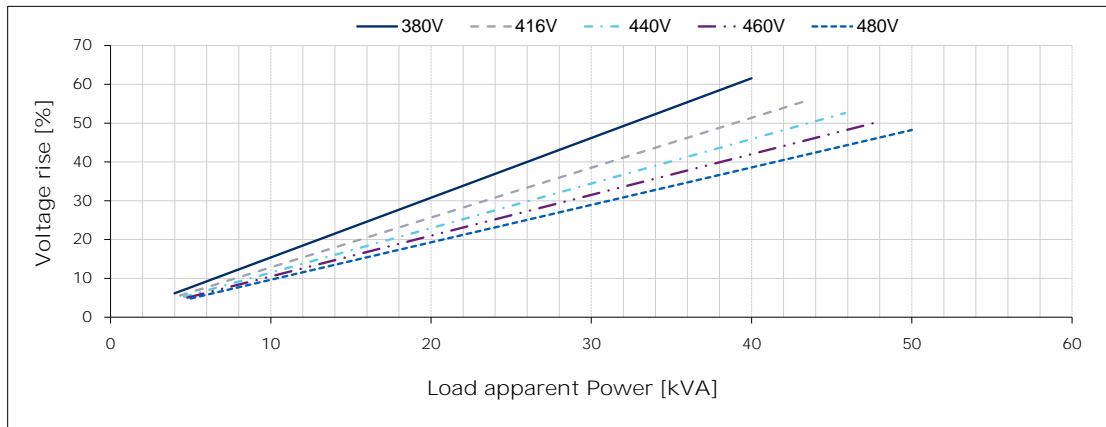

This document is the property of Marelli Motori S.p.A. No part of this document may be copied or reproduced in any way.

The attached information should be considered a guideline for commercial discussion and could be subject to review. Marelli Motori reserves the right to make changes in the data without notice.