




# ELETTROPOMPE SOMMERSE

## *SUBMERSIBLE PUMPS*

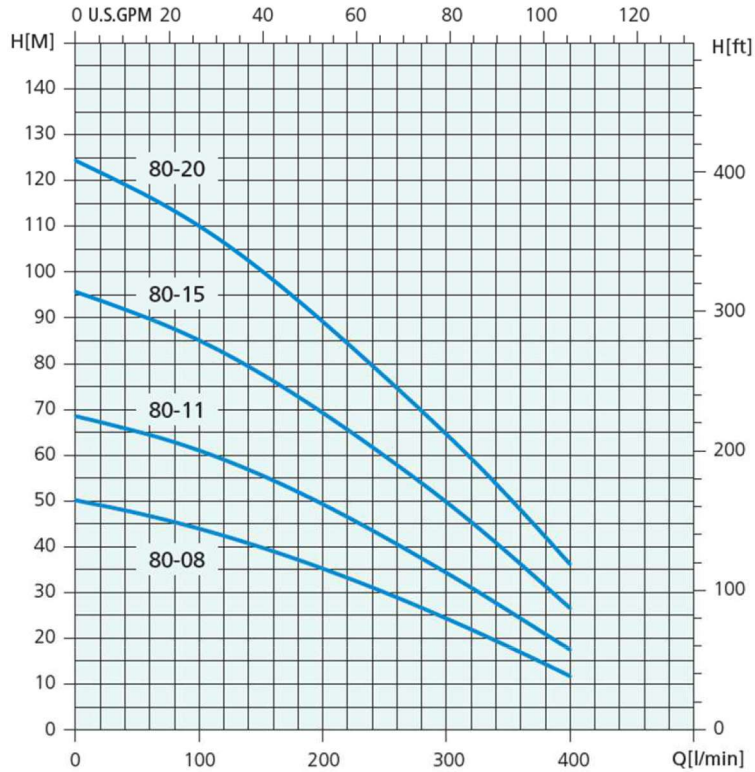

TIPO TYPE	POTENZA NOMINALE NOMINAL POWER		STADI STAGES	Q = PORTATA - CAPACITY																	DNM	DIMENSIONI DIMENSIONS	
	P2			m <sup>3</sup> /h	0	8,4	9,6	10,8	12	13	14,4	16	17	18	19	20	22	23	24	Lunghezza Lenght A (mm)		Peso Weight (Kg)	
	HP	kW		lt/1'	0	140	160	180	200	220	240	260	280	300	320	340	360	380	400				
ST 80-11	4	3	11	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.																	2"	880	8,1



# ELETTROPOMPE PER POZZI

## *SUBMERSIBLE PUMPS FOR WELLS*



Isolamento classe F  
Protezione IP68  
Partenza/ora 40 max.  
Camicia esterna Acciaio Inox  
Tenute meccanica Ceramica/Carbone

*Insulation Class F  
Protection IP 68  
Start/hour 40 max.  
External casing Stainless Steel  
Mechanical seal Ceramic/Graphite*

### DATI TECNICI - TECHNICAL DATA

MOTORI TRIFASE 50Hz  
THREE-PHASE MOTORS 50 Hz

TIPO TYPE	P2		Voltage V	In A	Istart A	Efficiency	COSφ	RPM	Thrust Load		Cavo - Cable	
	kW	HP							N	mm <sup>2</sup>	m	
<b>4-MWt 4</b>	3	4	400	7.4	43	0.73	0.80	2850	5000	1.5	2.5	