


# MG 3000 I-HE 3,1 LT



Honda GX 160 Engine

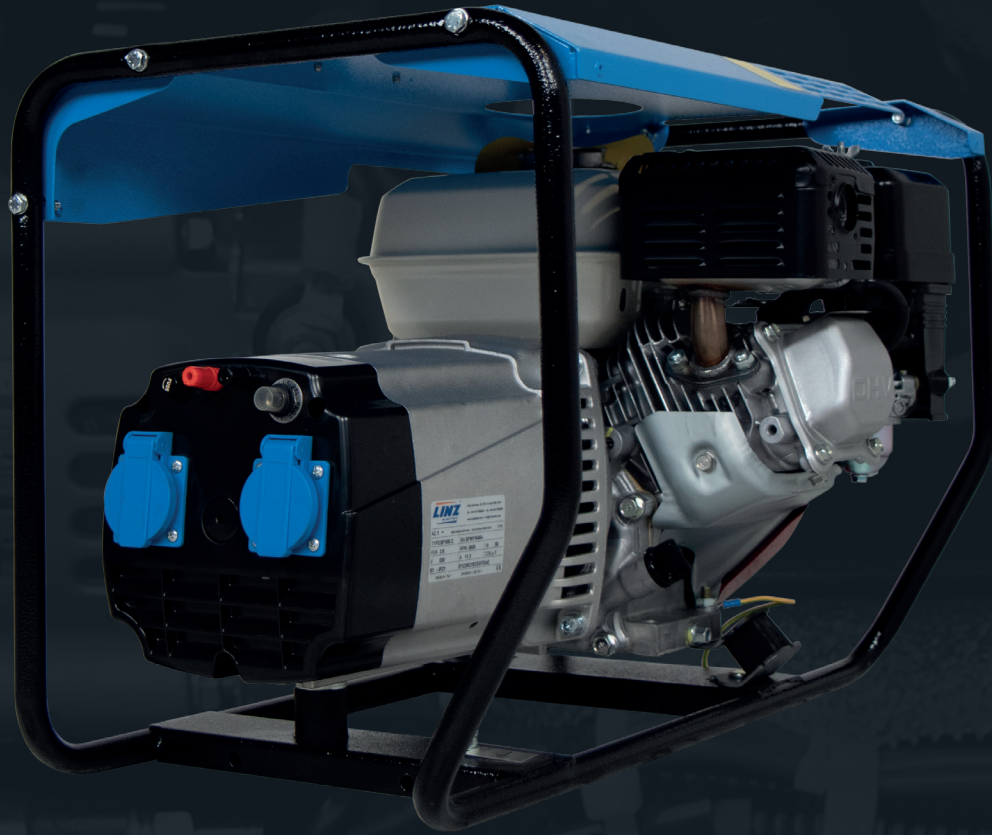

Frontal panel



3,1 Lt Fuel Tank



Stage V

We offer now what others will do tomorrow.



**GenSet s.p.a.**

Via Stazione 5 - 27030  
Villanova d'Ardenghi (PV) - Italy  
Phone: +39-0382-5091

[commerciale@genset.it](mailto:commerciale@genset.it)  
[www.genset.it](http://www.genset.it)

 **GenSet**  
Next Gen technology  
for top business.

## PORTABLE SINGLE-PHASE POWER GENERATOR

OUTPUT POWER 3 kVA

PETROL ENGINE 3000 RPM

FUEL TANK 3,1 LT

### Standard Features

- Low oil level shutdown device
- 2 x 230 V - 50 Hz single-phase Schuko socket protected by circuit breaker
- 12Vdc battery charger outlet protected by fuse

### Noise level

- Lwa 95 (70 dB a 7 mt)

### AC generator - 50Hz

- Type: synchronous
- Single-phase power (max.): 3 kVA - 230 V
- Battery charger power: 120 W - 12 V - 10 A - DC
- Power Factor:  $\cos \phi$  0,8

### Petrol Engine 3000 rpm

- Type: Honda GX 160 OHV - STAGEV - 1 cyl. 4,3 HP (3,2 kWm) 163 cm<sup>3</sup>
- Cooling system: air
- Starting system: recoil
- Fuel tank capacity: 3,1 lt
- Fuel consumption @ 75%: 1,4 lt/h

### Other features

- Insulation Class: H
- Ambient temperature: 40 °C (\*)
- Altitude: 1000 mt (\*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 585 x 360 x 410 mm
- Dry weight: 36 kg