Sirocco 300 **ProPack**





Weight and dimensions

Net weight of the balloon	2.3 kg - 5 lb
Envelope size	ø 60 cm / h 37 cm ø 23 in / h 15 in
Telescopic column	Up to 2,20 m (7.2 ft) Weight 1.6 kg (3.5 lb)

Packaging

Included in the transport case:

Full set lighting balloon with 1x standard envelope with telescopic column, 1x 52V battery, 1x battery charger, 1x quick-start guide, 1x envelope repair patch kit

Transport case	$67 \times 51 \times 26 \text{ cm (L*w*h)}$ $26 \times 20 \times 10 \text{ in (L*w*h)}$
Transport gross weight	Less than 23 kg (50 lb)

Accessories & Main options

Lenticular, reversed reflector, personalised with your Envelop logo, red top colour modifiable variants










Lighting data

Light Engine	Airstar LED Matrix: 4 x 5 500 lm
Maximum lumen	22,000 lm
Average LED life *	50,000 h
Colour temperature: daylight	5,000 K
CRI	70
Light under the balloon ** (2.2 m - 7.2 ft high)	345 lx - 32 fc

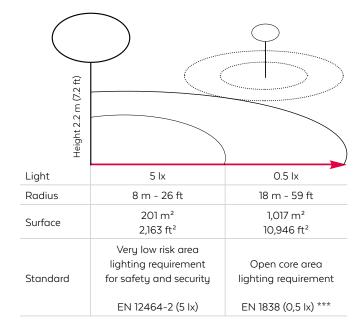

Technical data

Power consumption 160 W Efficiency 138 Im/W 8,148 Im/kg - 3,728 Im/lb Available voltage 52 V battery Mode Full Efficient Eco Battery lifetime 4 h 6.5 h 12 h Recommended battery 1,7 kWh / 52 V	Wind resistance of the balloon	80 km/h - 50 mph
Available voltage Mode Battery lifetime 8,148 lm/kg - 3,728 lm/lb 52 V battery Full Efficient Eco	Power consumption	160 W
Mode Full Efficient Eco Battery lifetime 4 h 6.5 h 12 h	Efficiency	
Battery lifetime 4 h 6.5 h 12 h	Available voltage	52 V battery
	Mode	Full Efficient Eco
Recommended battery 1,7 kWh / 52 V	Battery lifetime	4 h 6.5 h 12 h
	Recommended battery	1,7 kWh / 52 V
Certifications IEC-60598-1, CE, IP54	Certifications	IEC-60598-1, CE, IP54

Flame-retardant fabric

Airstar Light App

Control your balloons easily and remotely!





Control up to 250 balloons. Max Mesh range between two ballons: up to 100 m - 109,3 yd



4 light animations available







