




**SUPER
SILENCED**

Soundproof box



Easy installation



Compact

Compact, lightweight and silenced vehicular generator, designed for the installation on special vehicles such as Civil Defense rescue vehicles, workshop wagons, motorhomes, trucks and caravans.

Equipped with Honda 3000 RPM engine is designed with on board control panel and built-in muffler, version with built-in 17 litres fuel tank in plastic or steel available.



Stage V






MHS 6200 H/SA

Remote control panel with:
 - Multifunction display showing single-phase generator voltage, battery voltage, frequency, hour meter, RPM
 - Start / Stop button

On board:

Connection cable to remote panel
 Safety shutdown in case of low oil level, high water temperature, engine failure
 Circuit breaker
 General shutdown switch
 Built-in muffler

DIMENSIONS IN MM

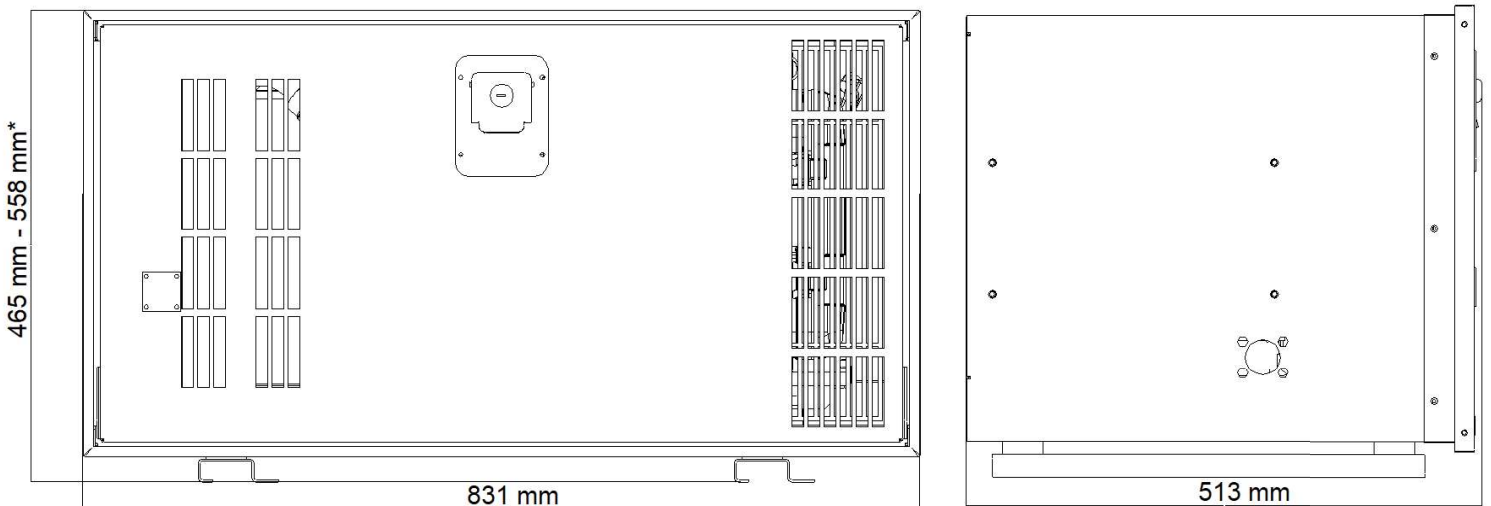

*height of with built-in tank version



MHS 6200 H/SA	
Noise level Lwa	83 (58 dB a 7 mt)
AC generator-50Hz	Synchronous
Single-phase max. power	6,2 kVA - 230 V
Power Factor	cos ϕ 0,8
Honda 3000 RPM engine	GX 390 OHV
Fuel	Petrol
No. cylinders	1
Power	11 HP (8,2 kWm)
Displacement	390 cm ³
Cooling system	Air
Starting system	Electric
Fuel tank capacity	17 lt (built-in fuel tank version)
Fuel consumption @75%	3,3 lt/h
Insulation Class	H
Ambient temperature	40 °C
Altitude	1000 mt
Degree of protection	IP 23
Dimensions (LxWxH)	831x513x465 mm - 831x513x558 mm (built-in fuel tank version)
Dry weight	140 kg - 150 kg (built-in fuel tank version)



MHS 6200 H/SA

Options on request*

- 1- Low fuel indicator kit
- 2- Fuel filler with key lock cap
- 20 lt plastic fuel tank with brackets
- 20 lt steel fuel tank with brackets
- 1 mt tank connection pipe with fuel filler

*only for not built-in fuel tank version



NOTE

