

PD 10.6 S




• 10,5 lt Fuel Tank

Control panel




Central lifting eye

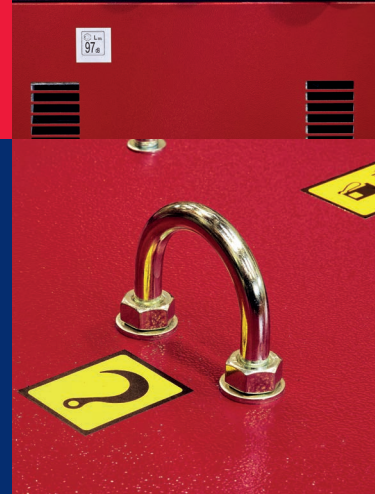

10,5 lt Fuel Tank



Unit of measure: mm

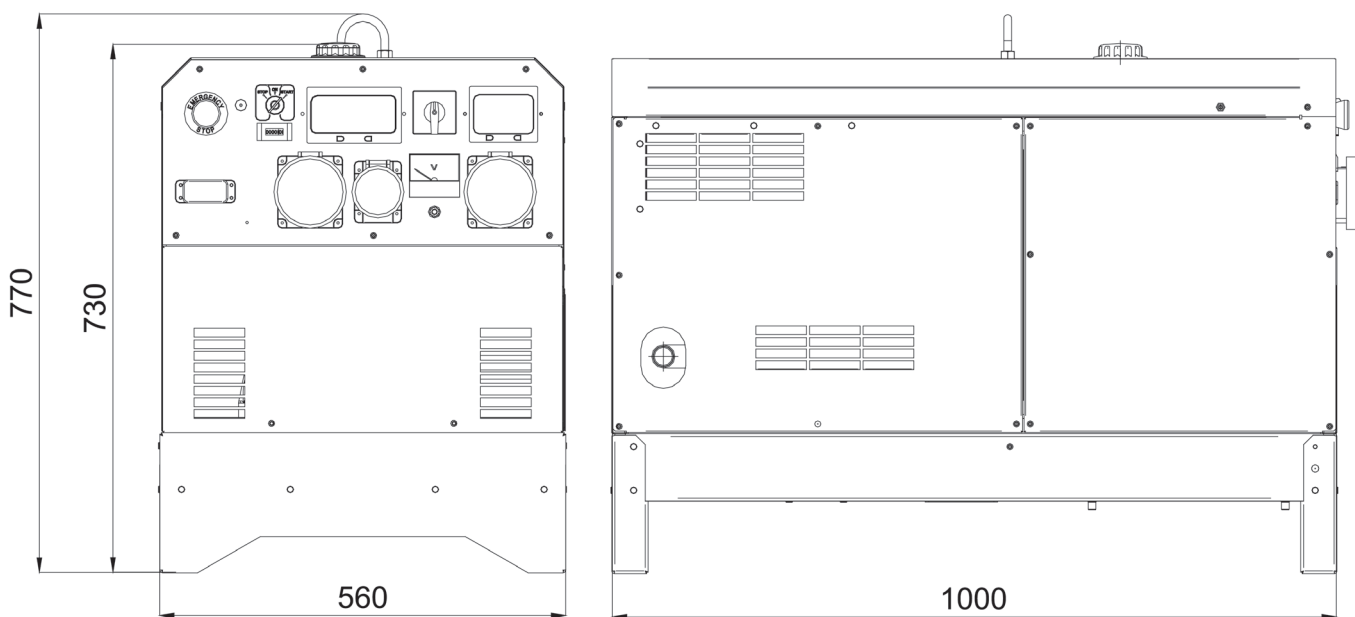

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.



Output power 10 kVA three-phase
Output power 6,6 kVA single-phase

Description

- Silenced power generator
- Electric starter
- Diesel engine 3000 rpm
- 10,5 lt fuel tank

Standard Features

- Voltmeter
- Hourmeter
- Earth leakage circuit breaker
- Emergency stop button
- Starter battery
- 1 x 16 A, 400 V - 50 Hz EEC three-phase socket
- 1 x 32A, 230V - 50 Hz EEC single-phase socket
- 1 x 16A, 230V - 50 Hz EEC single-phase socket
- Power output protection
- Fitted for AMF/ATS or Remote control operation
- Reinforced single-phase output power selector
- Central lifting eye

Options

- Versions with different voltages
- Automatic voltage regulator (AVR)

Accessories on request

- AMF/ATS panel for auto start operation
- Trolley: two-wheels and handles
- Remote START/STOP kit

Noise level

- Lwa 97 (72 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Three-phase power (max.): 10 kVA - 400 V
- Single-phase power (max.): 6,6 kVA - 230 V
- Power Factor: $\cos \phi$ 0,8

**Diesel Engine
3000 rpm**

- Type: Lombardini 25LD330/2 - 2 cyl. - 12,6 hp (9,3 kWm) - 654 cm³
- Cooling system: air
- Starting system: electric
- Fuel tank capacity: 10,5 lt
- Fuel consumption @ 75%: 2,2 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 1000 x 560 x 730 mm
- Dry weight: 190 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.