

TECHNICAL DATA SHEET



**ALTERNATOR PRO35M G/4**

*Three-Phase brushless synchronous alternator with AVR - 4 poles*

## PRO35M G/4

### COMMON DATA

Rated Power at 50Hz	kVA	725	
Rated Power at 60Hz	kVA	870	
Rated Power Factor		0,8	
Nominal Temperature	°C	40	
Control System		self-excited	
Execution		brushless	
Regulation Type		AVR	
Insulation Class		H	
Protection		IP23	
Maximum Over speed	rpm	2250	
Overload		110% of rated power for one hour in a cycle of 6 hours	
Air Flow Requirement	m <sup>3</sup> /min	54,5 at 50Hz	64 at 60Hz
R.F.I. Suppression		Standard EN55011	

### REGULATION DATA

AVR		HVR30
Sensing		three-phase
Voltage Regulation		±1%
Sustained Short Circuit		> 300% of rated current

### WINDING DATA

Stator Winding		Double layer with auxiliary winding	
Rotor Winding		with damping cage	
Winding Pitch		2/3	
Number of Leads of Stator		12	
Stator Winding Resistance	Ω	0,0019 at 20°C	
Rotor Winding Resistance	Ω	1,7 at 20°C	
Exciter Stator Resistance	Ω	12,5 at 20°C	
Exciter Rotor Resistance	Ω	0,095 at 20°C	
THD at full load		<3%	
THD at no load		<2,5%	
Excitation at no load	Adc	0,52	
Excitation at full load	Adc	2,35	

### STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

### ON REQUEST

UL 1446, Systems of Insulating Materials - General CSA-C22.2 No. 0, Appendix B, General Requirements - Canadian Electrical Code, Part I

## PRO35M G/4

### ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	<b>380/220</b>	<b>400/230</b>	<b>415/240</b>	<b>440/254</b>	<b>415/240</b>	<b>440/254</b>	<b>460/266</b>	<b>480/277</b>
Rated Power in Class H (125°C/40°C)	kVA	725	725	725	670	785	820	870	870
	kW	580	580	580	536	628	656	696	696
Rated Power in Class F (105°C/40°C)	kVA	650	650	650	600	700	740	780	780
	kW	520	520	520	480	560	592	624	624
Rated Power Standby (150°C/40°C)	kVA	765	765	765	710	830	865	920	920
	kW	612	612	612	568	664	692	736	736
Rated Power Standby (163°C/27°C)	kVA	795	795	795	735	860	895	950	950
	kW	636	636	636	588	688	716	760	760

### EFFICIENCY IN CL. H

4/4	95,3%							96,2%
3/4	95,8%							96,6%
2/4	94,6%							95,2%
1/4	93,1%							93,7%

### REACTANCES AND TIME CONSTANTS

pcc		0,31							
X <sub>d</sub> - dir. axis synchronous		365%	329%	306%	251%	397%	369%	358%	329%
X' <sub>d</sub> - dir. axis transient		21,1%	19,0%	17,7%	14,5%	22,9%	21,3%	20,7%	19,0%
X'' <sub>d</sub> - dir. axis subtransient		11,1%	10,0%	9,3%	7,6%	12,1%	11,2%	10,9%	10,0%
X <sub>q</sub> - quad. axis reactance		238%	215%	200%	164%	260%	241%	234%	215%
T' <sub>do</sub> - O.C. field time constant		2300ms							
T' <sub>d</sub> - Transient time constant		145ms							
T'' <sub>d</sub> - Sub-transient time constant		9ms							

### MECHANICAL DATA


Bearing non drive end			6316-2RS-C3
Bearing drive end (B3/B14 form)			6319-2RS-C3
Weight of generator	in B2	kg	1658
	in B3/B14	kg	1682
	in B3/B9	kg	\

# PRO35M G/4


## MOMENT OF INERZIA

B3/B9	kg·m <sup>2</sup>	\
SAE 7½	kg·m <sup>2</sup>	\
SAE 8	kg·m <sup>2</sup>	\
SAE 10	kg·m <sup>2</sup>	\
SAE 11½	kg·m <sup>2</sup>	\
SAE 14	kg·m <sup>2</sup>	12,757
SAE 18	kg·m <sup>2</sup>	13,097
B3/B14	kg·m <sup>2</sup>	12,242

## DERATING CURVES

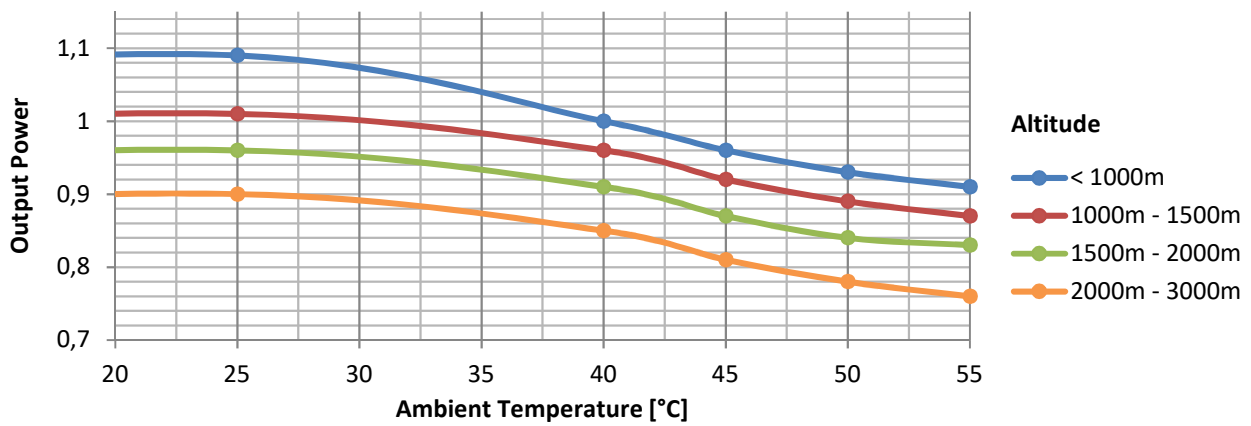


## WIRING DIAGRAM

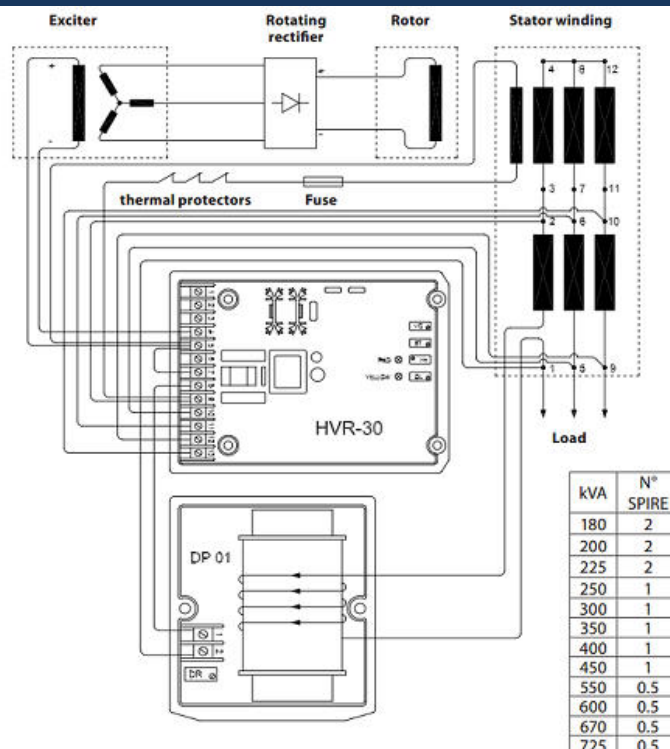

# PRO35M G/4


## TRANSIENT VOLTAGE VARIATION 50Hz

### Transient Voltage Variation @ 50Hz

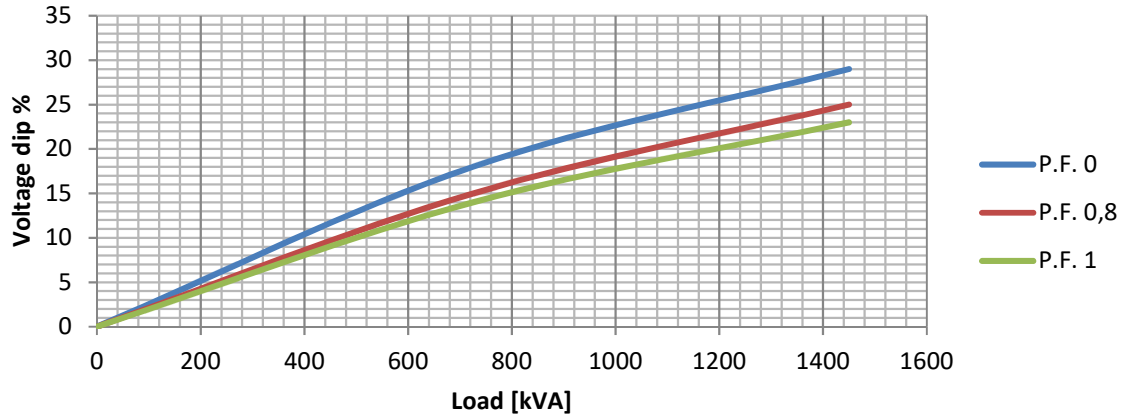


## TRANSIENT VOLTAGE VARIATION 60Hz

### Transient Voltage Variation @ 60Hz

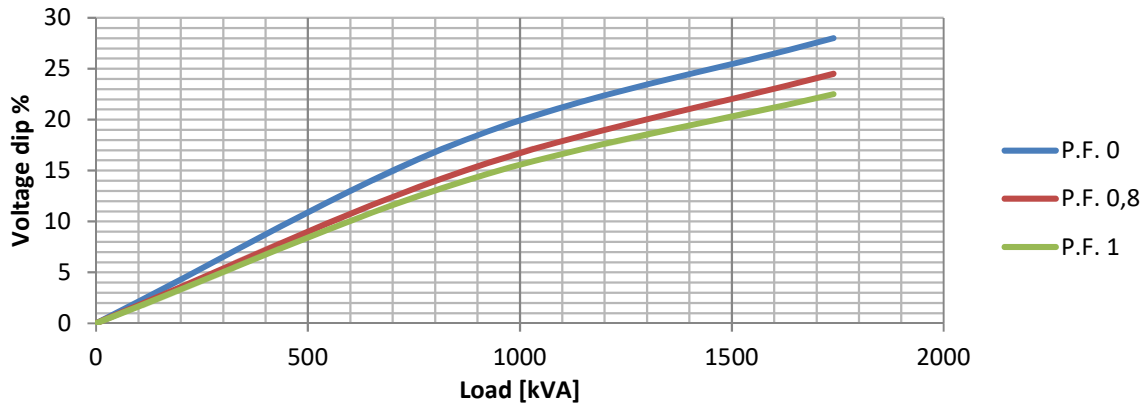


# PRO35M G/4

## EFFICIENCY 50Hz

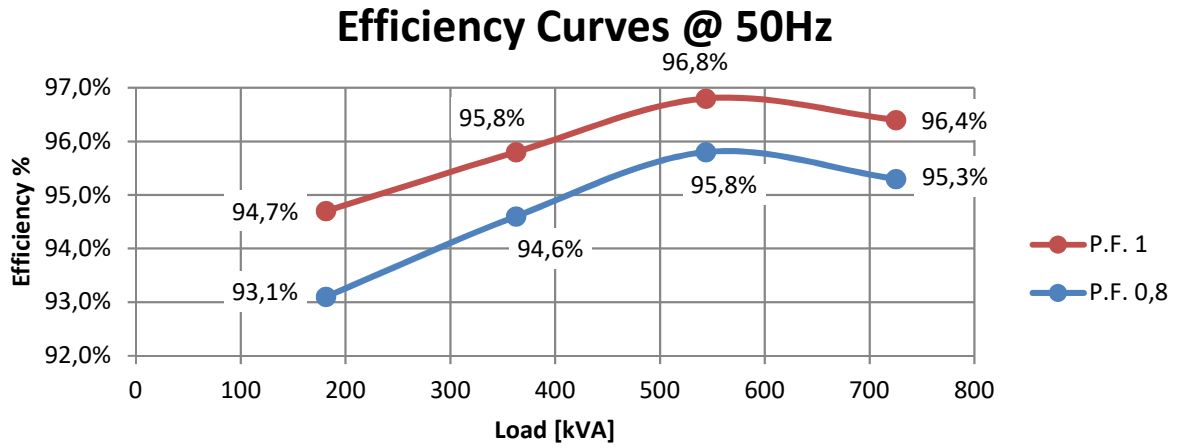


## EFFICIENCY 60Hz

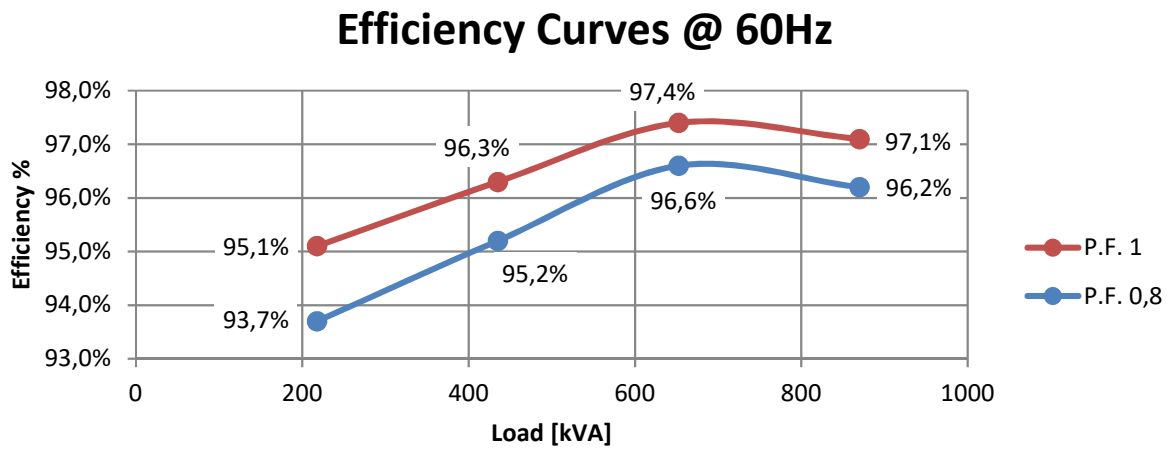


# PRO35M G/4

FORMA - FORM B3/B14

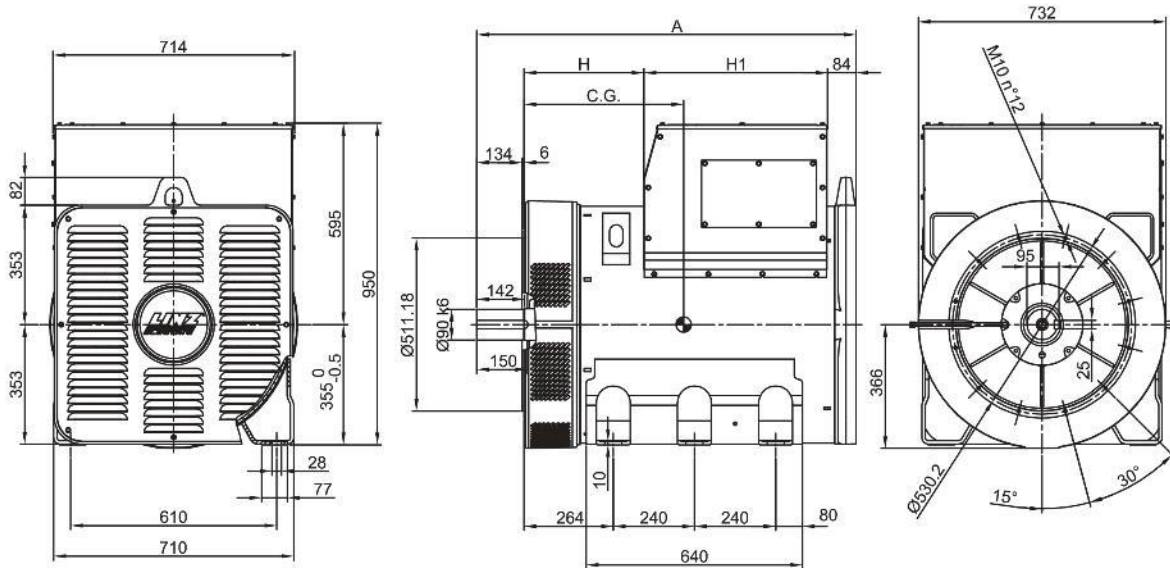

FORMA - FORM SAE

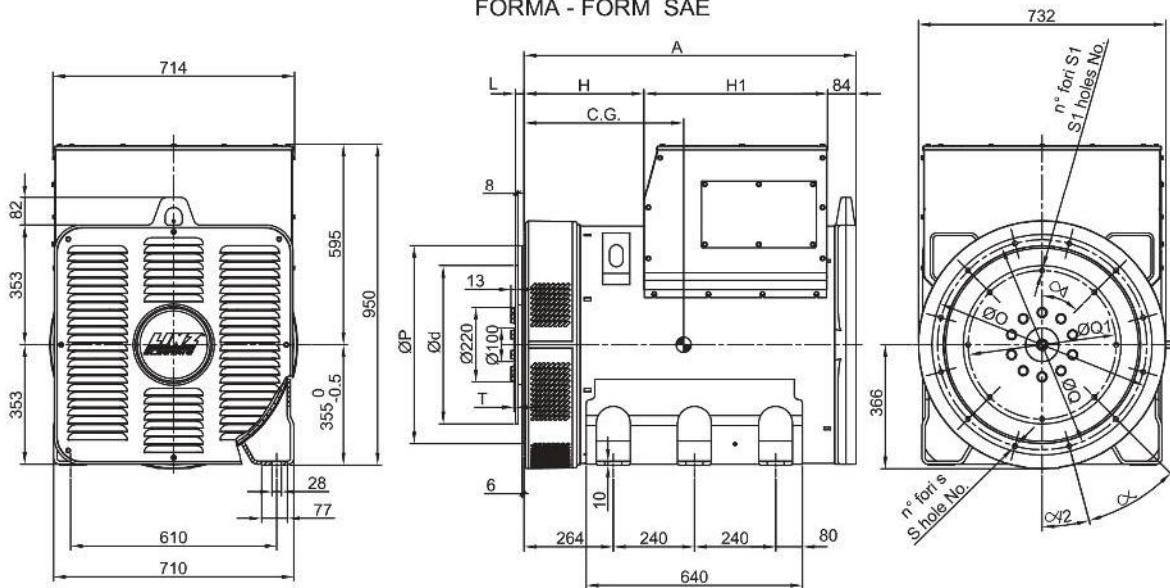

FORMA - FORM		A	H	H1	TIPO - TYPE	C.G.
B3/B14	PRO35 S	1122	454.5	443.5	PRO35S B/4	456
	PRO35 M	1247	479.5	543.5	PRO35S C/4	466
	PRO35 L	1347	579.5		PRO35S D/4	478
SAE	PRO35 S	982	454.5	443.5	PRO35M E/4	516
	PRO35 M	1107	479.5	543.5	PRO35M F/4	516
	PRO35 L	1207	579.5		PRO35M G/4	539
					PRO35L H/4	588

SAE N.	FLANGIE - FLANGES - BRIDAS					
	Ø O	Ø P	Ø Q	n. fori holes No.	S	α
0	710	647.7	679.5	16	14	22.5°
1/2	650	584.2	619.2	12	14	30°
1	552	511.18	530.2	12	12	30°

SAE N.	GIUNTI A DISCO - COUPLING DISCS- JUNTAS A DISCOS						
	L	Ø d	Ø Q1	n. fori holes No.	S1	α1	T
14	25.4	466.72	438.15	8	14	45°	4.3
18	15.7	571.5	542.92	6	17	60°	14