


MGF 33 Y



40 Lt Fuel Tank



Control panel

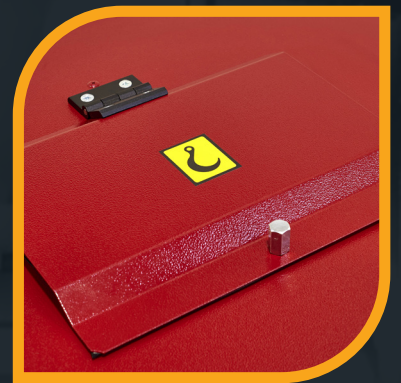

Central lifting eye



Stage V

We offer now what others will do tomorrow.



GenSet s.p.a.

Via Stazione 5 - 27030
Villanova d'Ardenghi (PV) - Italy
Phone: +39-0382-5091

commerciale@genset.it
www.genset.it

GenSet
Next Gen technology
for top business.

SILENCED POWER GENERATOR

OUTPUT POWER 33 KVA THREE-PHASE AND 11 KVA SINGLE-PHASE

DIESEL ENGINE 1500 RPM

FUEL TANK 40 LT

Standard Features	<ul style="list-style-type: none"> • Auto engine protection shutdown system with warning lights in case of low oil pressure and high cooling water temperature • Voltmeter • Hourmeter • Earth leakage circuit breaker • Emergency stop button • Starter battery • 1 x 63 A, 400 V - 50 Hz EEC three-phase socket • 1 x 16 A, 400 V - 50 Hz EEC three-phase socket • 2 x 16A, 230V - 50 Hz EEC single-phase sockets • Power output protection • Automatic voltage regulator (AVR) • Fork lift pockets • Central lifting eye
Options available as factory options	<ul style="list-style-type: none"> • Versions with different voltages • 60Hz version • Engine heater
Accessories on request	<ul style="list-style-type: none"> • AMF/ATS panel for auto start operation • GRT2W: two-wheels site tow undercarriage • Remote Start/Stop kit by cable (20 mt)
Noise level	<ul style="list-style-type: none"> • Lwa 97 (72 dB a 7 mt)
AC generator - 50Hz	<ul style="list-style-type: none"> • Type: synchronous • Three-phase power (max.): 33 kVA - 400 V • Single-phase power (max.): 11 kVA - 230 V • Power Factor: $\cos \phi$ 0,8
Diesel Engine 1500 rpm	<ul style="list-style-type: none"> • Type: Yanmar 4TNV98 - 4 cyl. - 46,1 hp (34,4 kWm) - 3319 cm³ • Cooling system: water • Starting system: electric • Fuel tank capacity: 40 lt • Fuel consumption @ 75%: 6,4 lt/h
Other features	<ul style="list-style-type: none"> • Insulation Class: H • Ambient temperature: 40 °C (*) • Altitude: 1000 mt (*) • Mechanical Protection: IP 23 • Dimensions (L x W x H): 1640 x 770 x 1076 mm • Dry weight: 830 kg

(*) - For altitude and temperature values higher than those listed above, please consult the manufacturer to verify the available power.
In line with our continued development, innovation and voice of customer program, we reserve the right to change data without notice.