

## MP36-2

MOTOR PUMPS - FOR CLEAN WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

### Main features

Type	Semitrash	
Max suction head	m	8
Max Delivery Head	m	30
Delivery Volume	l/min	600

### Performance curve

Graph

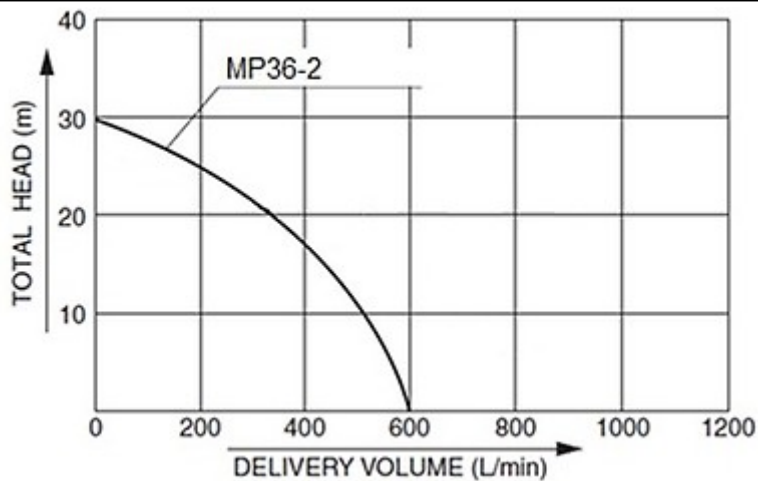

### Engine specifications

Nr. of cylinder and disposition		1 inclination angle
Displacement	cm <sup>3</sup>	118
Fuel		Petrol
Starting system		Recoil



### Pump specifications

Manufacturer		KOSHIN
Inlet pipe diameter	'	2
Outline pipe diameter	'	2
Max Solid Size	mm	-
Material for mechanical seal		Carbon Ceramic
Material for impeller		Cast Iron
Material for volute		Aluminum Die Cast

### Dimensional data

Length	(L) mm	470
Width	(W) mm	365
Height	(H) mm	390
Dry weight	Kg	26

### Consumption, running time and noise

Fuel tank capacity	l	2.0
Running time	h	2.0
Noise level at 7 m	dB(A)	78
Guaranteed noise level (LWA)	dB(A)	103

### General equipment

Strainer		1
Coupling Set		2
Hose band		3
Spark plug tool		Standard
Oil guard		Standard



### Accessories

Inlet pipes - length 8m		2"
Inlet pipes - length 25m		2"
Outlet pipes - length 10m		2"
Outlet pipes - length 50m		2"
Outlet pipes - length 100m		2"



Printed on 14/04/2015 (ID 697)

©2012 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice | ENERGY GENERATION is registered trademarks of PR INDUSTRIAL s.r.l. Other company, product or service names may be trademarks or service marks of others. RevA (06/2012).