


SKY 4.0 • 4 Sensors

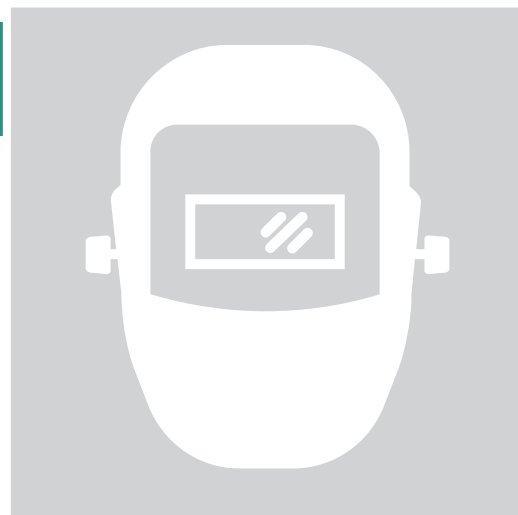

	SKY 4.0
Optical Class	1/1/2
Filter Size	110 x 90 x 10 mm
Viewing Area	100 x 53 mm
Sensors	4
Light Shade	4
Darkness Shade	DIN 5 - 8 / DIN 9 - 13 variable
Grinding	YES
Protection Adjustment	External · Variable shade
UV/IR Protection	up to DIN 16
Switching time	from light to dark - 1/25000 s from dark to light - 0.1 - 1.0 s
Sensitivity / Delay	Adjustable (by infinite knob)
Power Supply	Solar cells and 1 Lithium CR2450 battery
ON/OFF	Automatic
Low Battery Alarm	YES - Red pilot lamp
Min Amp/TIG Rating	≥ 5A AC-DC
Code	21905148