



## TWO BEARING MOMENTS OF INERTIA

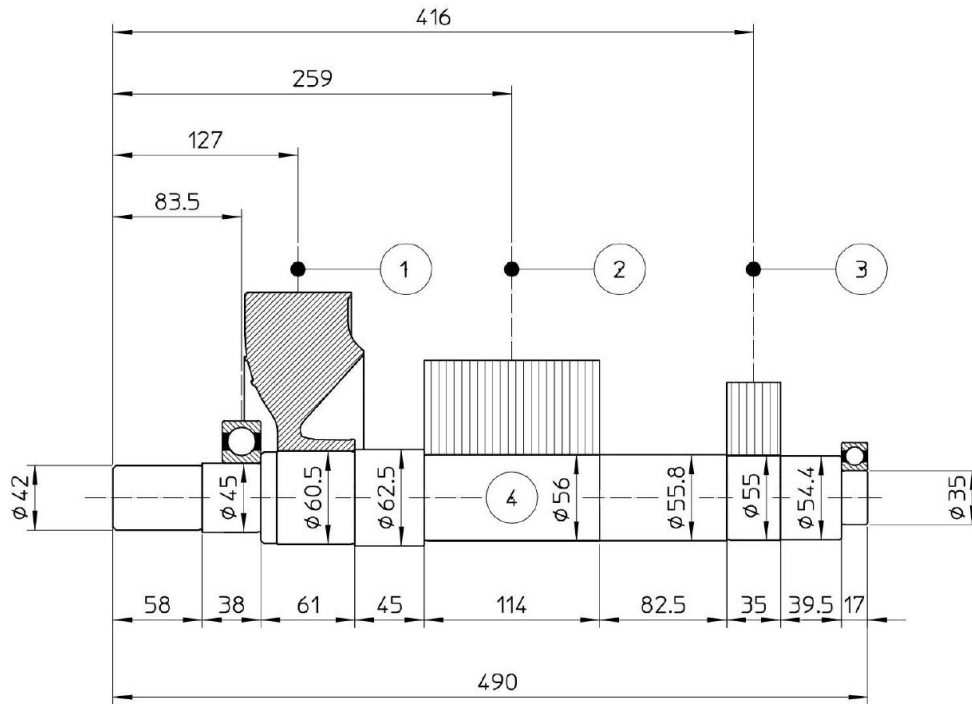

POS.	COMPONENT	WEIGHT (kg)	J (kgm <sup>2</sup> )
1	FAN	0.7	0.0046
2	MAIN ROTOR	17.2	0.0690
3	EX. ROTOR	4.4	0.0138
4	SHAFT	8.7	0.0034
TOTAL		31.0	0.0908


## TWO BEARING DIMENSIONS

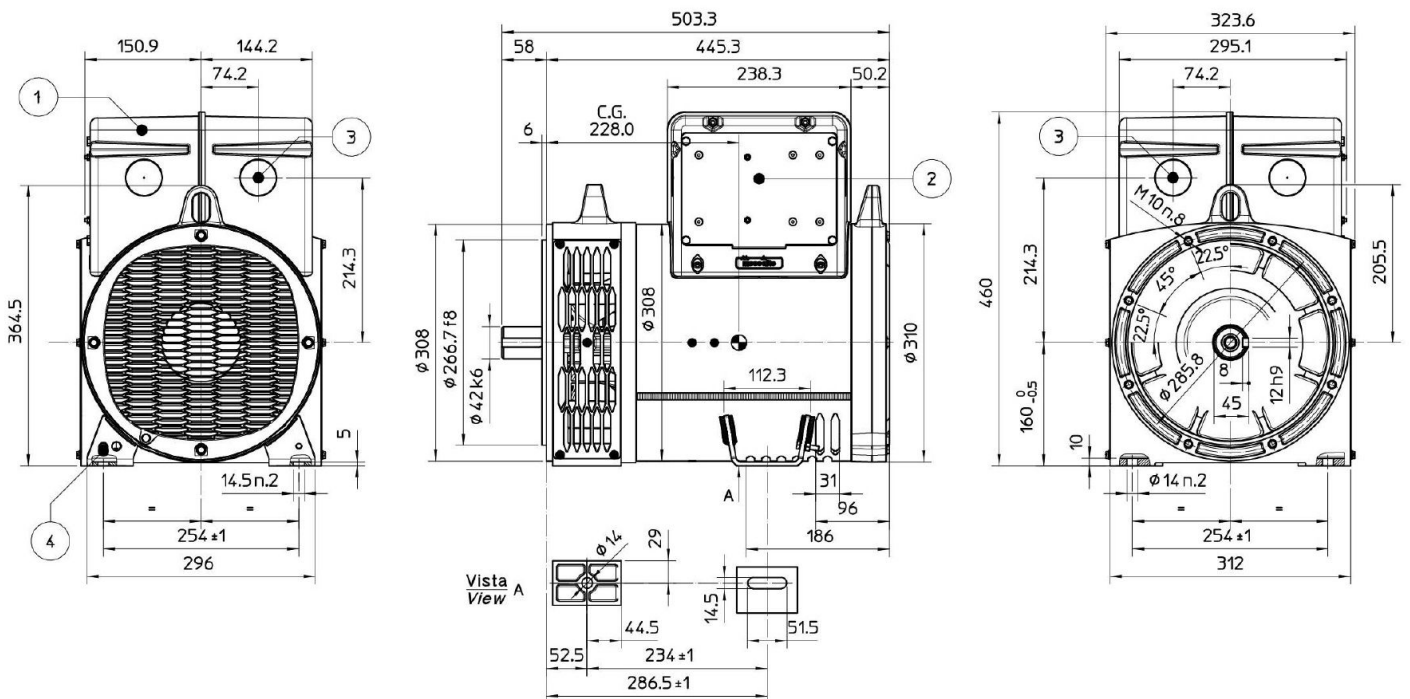

- |    |  |
|----|--|
| 1) | COPERCHIO REMOVIBILE PER ACCESSO AI TERMINALI PRINCIPALI<br>REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS |
| 2) | PANNELLO REMOVIBILE PER ACCESSO AL REGOLATORE<br>REMOVABLE PANEL FOR ACCESS TO AVR                       |
| 3) | PRE-TAGLIO PER INGRESSO CAVI φ48mm<br>PRE-CUT FOR CABLE ENTRY φ48mm                                      |
| 4) | VITE M6 PER MESSA A TERRA<br>SCREW M6 FOR GROUNDING  |

C.G.= GRAVITY CENTER


## SINGLE BEARING MOMENTS OF INERTIA

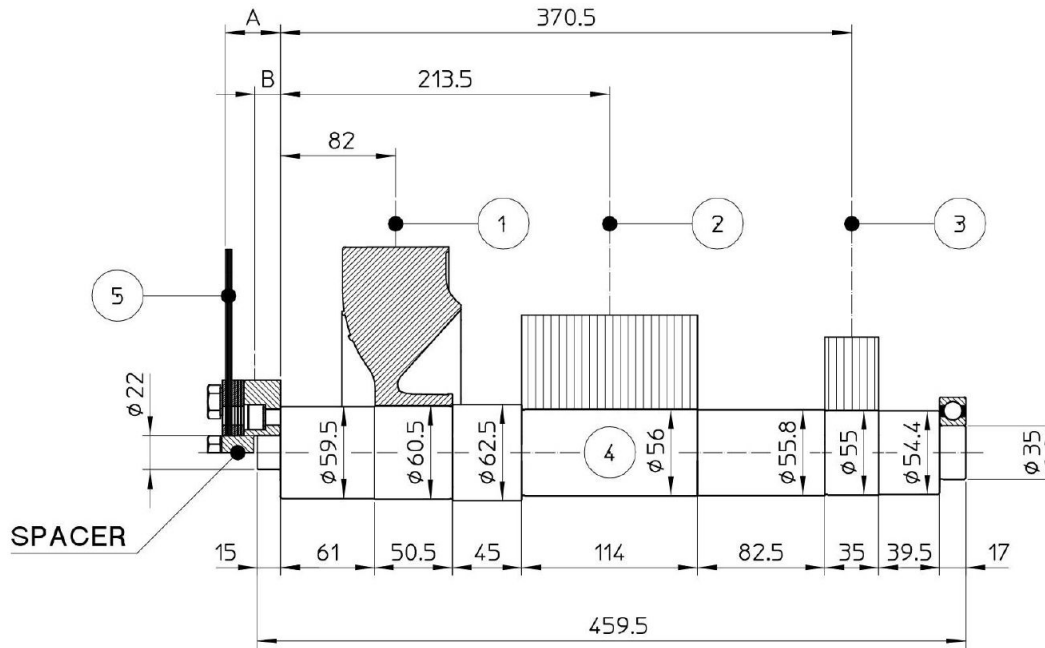

POS.	COMPONENT	WEIGHT (kg)	J (kgm <sup>2</sup> )
1	FAN	0.7	0.0046
2	MAIN ROTOR	17.2	0.0690
3	EX. ROTOR	4.4	0.0138
4	SHAFT	8.7	0.0036
TOTAL		31.0	0.0910

SAE N°	5 SHAFTS COUPLING FLEX PLATE		WEIGHT kg	J kgm <sup>2</sup>
	A	B		
6 1/2	4	2	1.4	0.0068
7 1/2	4	2	1.7	0.0104
8	35.6	28.3	2.8	0.0158
10	27.6	22.9	3.3	0.0303
11 1/2	14	11.2	3.6	0.0471

## SINGLE BEARING DIMENSIONS

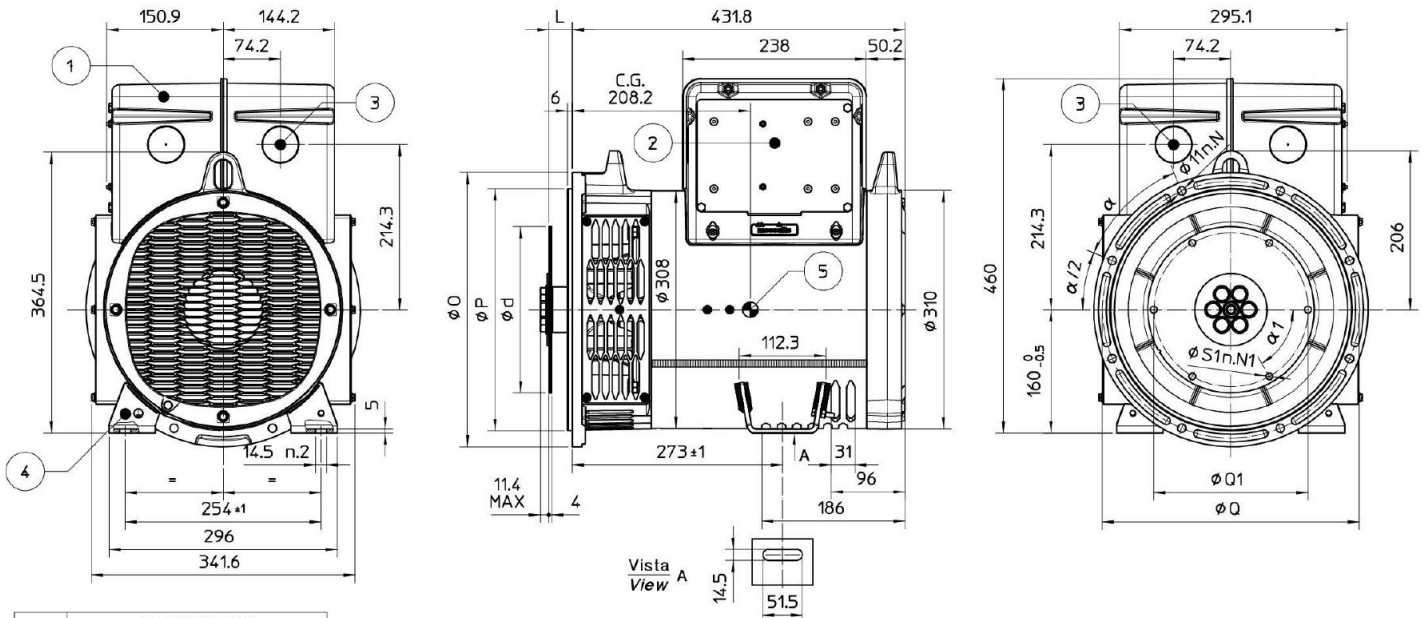

SAE N.	FLANGIA/FLANGE BRIDE/FLANSCH				
	O	P	Q	α	N
5	356	314.3	333.4	45°	8
4	403	362.0	381.0	30°	12
3	451	409.6	428.6	30°	12
2	490	447.7	466.7	30°	12

SAE N.	GIUNTI A DISCHI / DISC COUPLING DISQUE DE MONOPALIER / SCHEIBENKUPPLUNG					
	d	L	Q1	S1	α1	N1
6 1/2	215.90	30.2	200.00	9	60°	6
7 1/2	241.30	30.2	222.25	9	45°	8
8	263.52	62.0	244.47	11	60°	6
10	314.32	53.8	295.27	11	45°	8
11 1/2	352.42	39.6	333.37	11	45°	8

- 1) COPERCHIO REMOVIBILE PER ACCESSO AI TERMINALI PRINCIPALI  
REMOVABLE COVER FOR ACCESS TO MAIN TERMINALS
- 2) PANNELLO REMOVIBILE PER ACCESSO AL REGOLATORE  
REMOVABLE PANEL FOR ACCESS TO AVR
- 3) PRE-TAGLIO PER INGRESSO CAVI Ø4.8mm  
PRE-CUT FOR CABLE ENTRY Ø4.8mm
- 4) VITE M6 PER MESSA A TERRA  
SCREW M6 FOR GROUNDING
- 5) CENTRO DI GRAVITA' IN CONFIGURAZIONE SAE 3 VOLANO 11.5  
GRAVITY CENTER IN CONFIGURATION SAE 3 FLYWHEEL 11.5

C.G.= GRAVITY CENTER