

TECHNICAL DATA SHEET



ALTERNATOR E1X13S A/2

Three-Phase brushless synchronous alternator with AVR - 2 poles

E1X13S A/2

COMMON DATA

Rated Power at 50Hz	kVA	8,0	
Rated Power at 60Hz	kVA	10,0	
Rated Power Factor		0,8	
Nominal Temperature	°C	40	
Control System		self-excited	
Execution		brushless	
Regulation Type		AVR	
Insulation Class		H	
Protection		IP21	
Maximum Over speed	rpm	4500	
Overload		110% of rated power for one hour in a cycle of 6 hours	
Air Flow Requirement	m ³ /min	8,5 at 50Hz	10,2 at 60Hz
R.F.I. Suppression		Standard EN55011	

REGULATION DATA

AVR	HVR11	HVR30
Sensing	single-phase	three-phase
Voltage Regulation	±1%	±1%
Sustained Short Circuit	> 300% of rated current	

WINDING DATA

Stator Winding		Double layer with auxiliary winding
Rotor Winding		with damping cage
Winding Pitch		2/3
Number of Leads of Stator		12
Stator Winding Resistance	Ω	1,53 at 20°C
Rotor Winding Resistance	Ω	8,56 at 20°C
Exciter Stator Resistance	Ω	16,5 at 20°C
Exciter Rotor Resistance	Ω	2,15 at 20°C
THD at full load		<3%
THD at no load		<3%
Excitation at no load	Adc	0,19
Excitation at full load	Adc	1,03

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

ON REQUEST

UL 1446, Systems of Insulating Materials - General CSA-C22.2 No. 0, Appendix B, General Requirements - Canadian Electrical Code, Part I
 CAN/CSA - C22.2 No. 100-14 (R2009) Motors and Generators, UL1004-1 2nd ed. Rotating Electrical Machines - General Requirements, UL1004-4 2nd ed. Electric Generators

E1X13S A/2

ELECTRICAL DATA

Frequency		50Hz - 3000rpm				60Hz - 3600rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	8,0	8,0	8,0	6,5	9,0	10,0	10,0	10,0
	kW	6,4	6,4	6,4	5,2	7,2	8,0	8,0	8,0
Rated Power in Class F (105°C/40°C)	kVA	7,5	7,5	7,5	6,0	8,2	9,2	9,2	9,2
	kW	6,0	6,0	6,0	4,8	6,56	7,36	7,36	7,36
Rated Power Standby (150°C/40°C)	kVA	8,8	8,8	8,8	7,0	9,8	11,0	11,0	11,0
	kW	7,04	7,04	7,04	5,6	7,84	8,8	8,8	8,8
Rated Power Standby (163°C/27°C)	kVA	9,1	9,1	9,0	7,3	10,2	11,4	11,4	11,4
	kW	7,28	7,28	7,2	5,84	8,16	9,12	9,12	9,12

EFFICIENCY IN CL. H

4/4	80,2%							80,6%
3/4	80,4%							80,7%
2/4	77,0%							77,4%
1/4	73,0%							73,4%

REACTANCES AND TIME CONSTANTS

pcc		0,44							
X _d - dir. axis synchronous		410%	370%	344%	248%	445%	440%	403%	370%
X' _d - dir. axis transient		35,5%	32,0%	29,7%	21,5%	38,5%	38,1%	34,8%	32,0%
X'' _d - dir. axis subtransient		14,4%	13,0%	12,1%	8,7%	15,7%	15,5%	14,2%	13,0%
X _q - quad. axis reactance		244%	220%	204%	148%	265%	262%	240%	220%
T' _{do} - O.C. field time constant		310ms							
T' _d - Transient time constant		27ms							
T'' _d - Sub-transient time constant		7,5ms							

MECHANICAL DATA


Bearing non drive end		6305-2Z-C3	
Bearing drive end (B3/B14 form)		6208-2Z-C3	
Weight of generator	in B2	kg	60,7
	in B3/B14	kg	56,6
	in B3/B9	kg	\

E1X13S A/2


MOMENT OF INERZIA

B3/B9	kg·m ²	\
SAE 7½	kg·m ²	0,055
B2	kg·m ²	0,057

DERATING CURVES

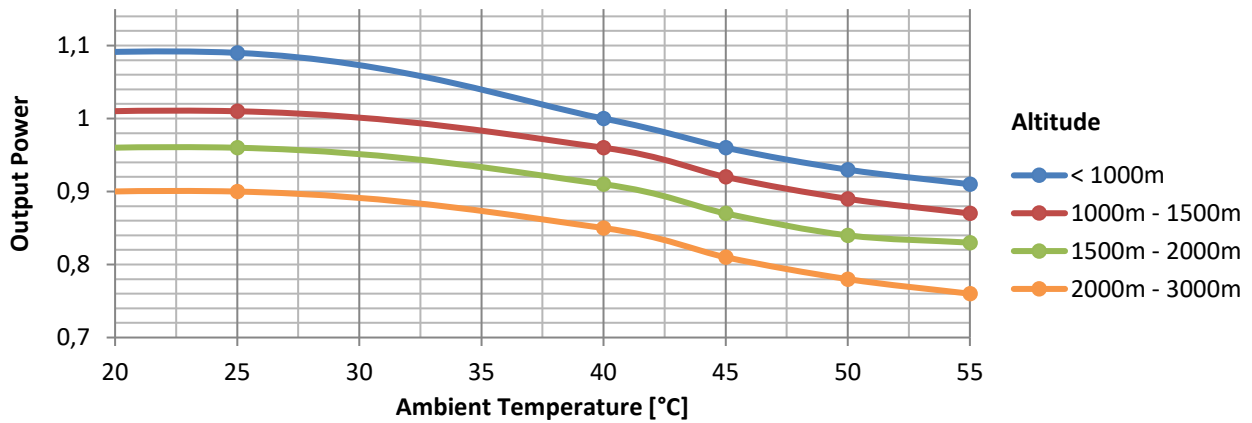


WIRING DIAGRAM

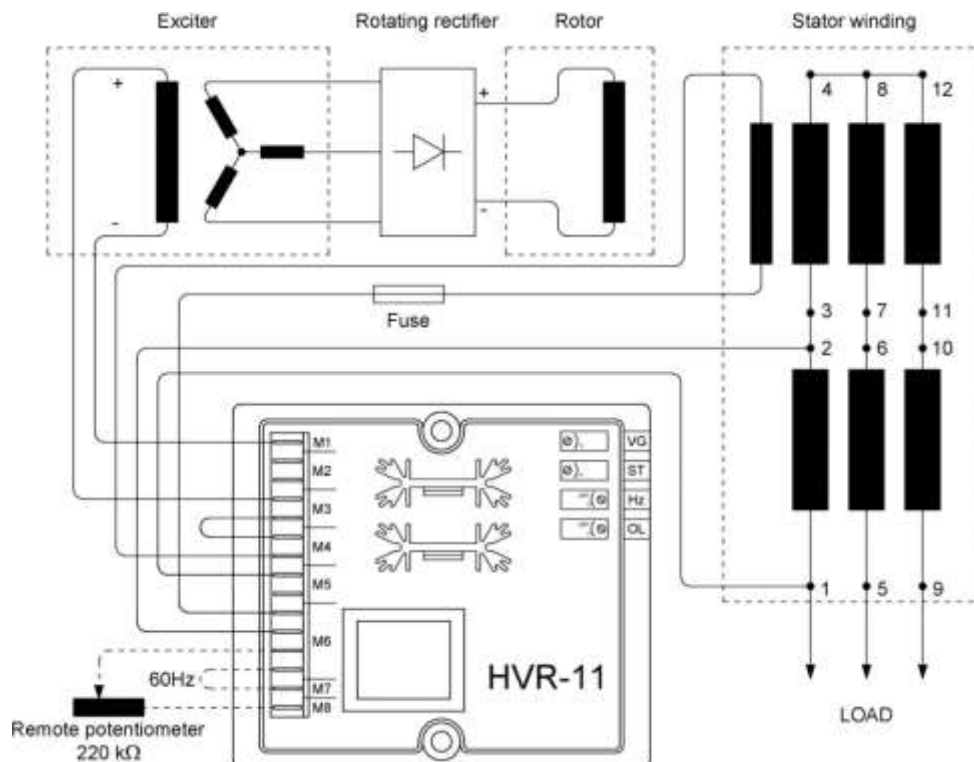

E1X13S A/2


TRANSIENT VOLTAGE VARIATION 50Hz

Transient Voltage Variation @ 50Hz

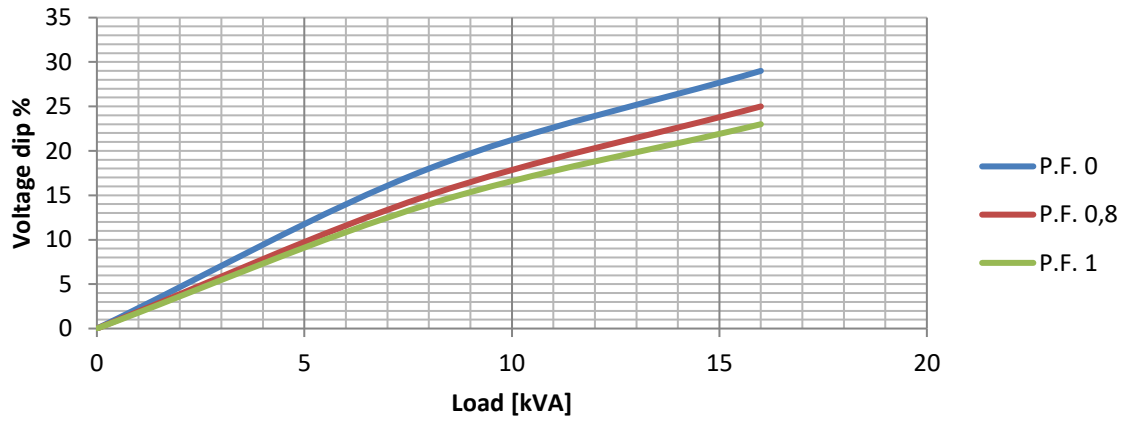

TRANSIENT VOLTAGE VARIATION 60Hz


Transient Voltage Variation @ 60Hz

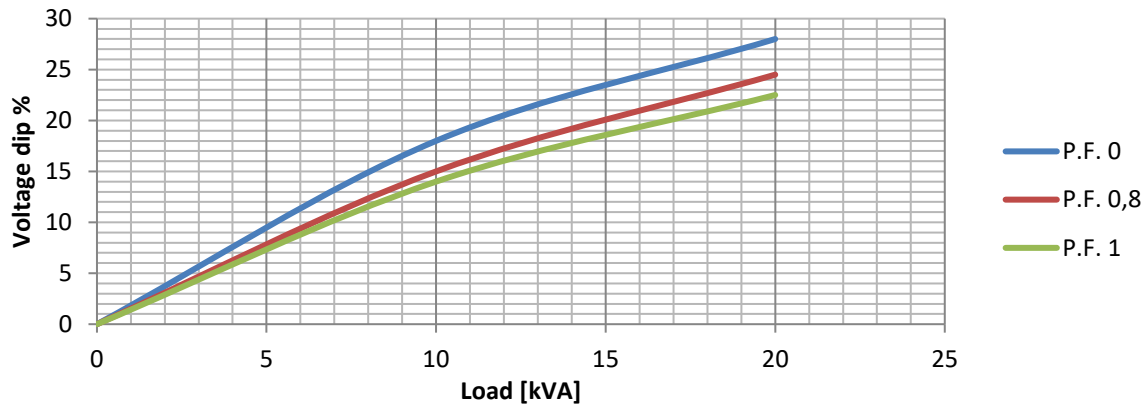

E1X13S A/2


EFFICIENCY 50Hz

Efficiency Curves @ 50Hz



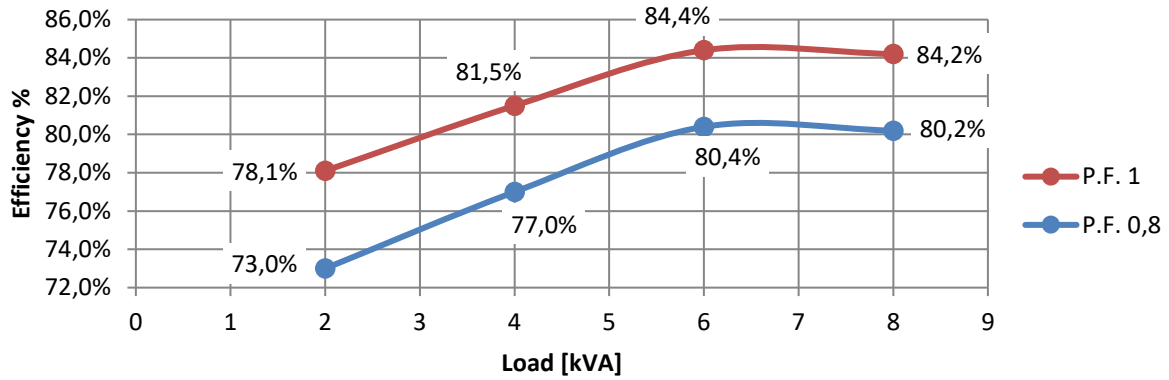


EFFICIENCY 60Hz

Efficiency Curves @ 60Hz

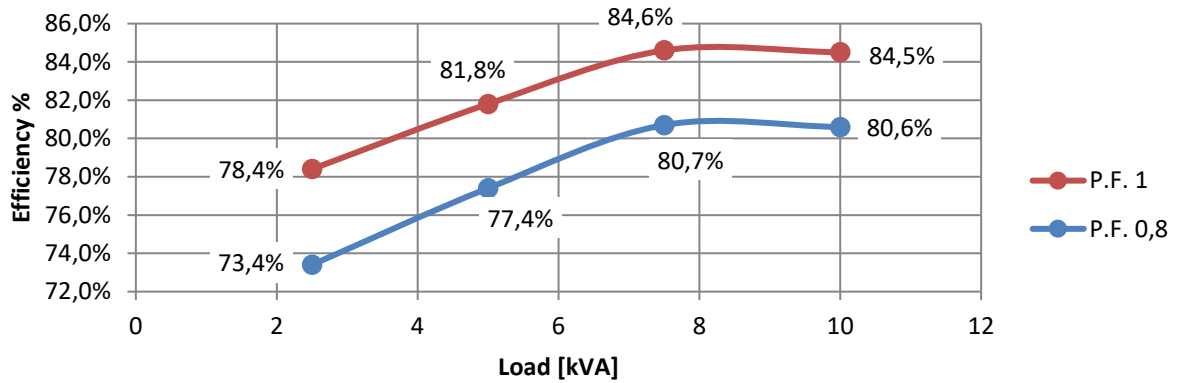

E1X13S A/2

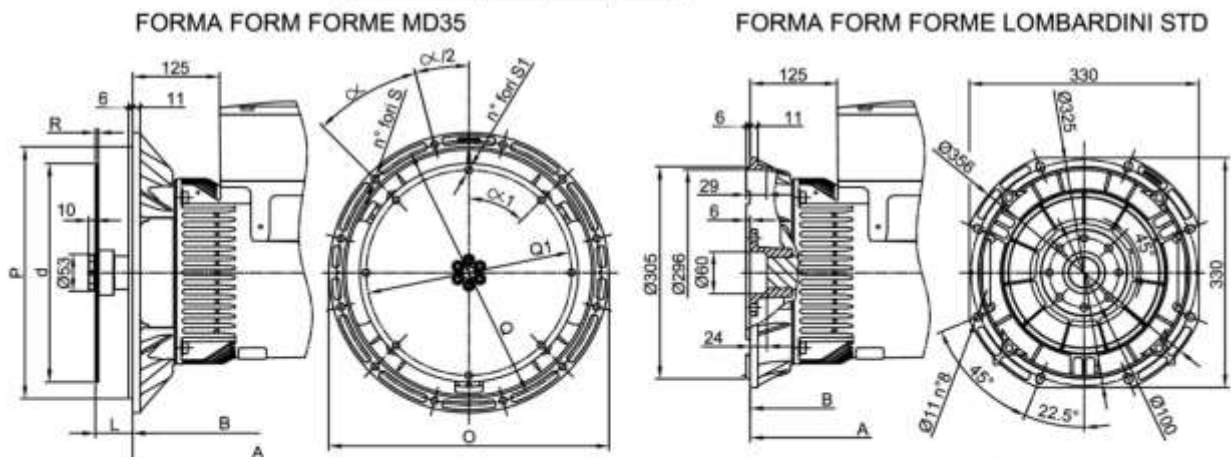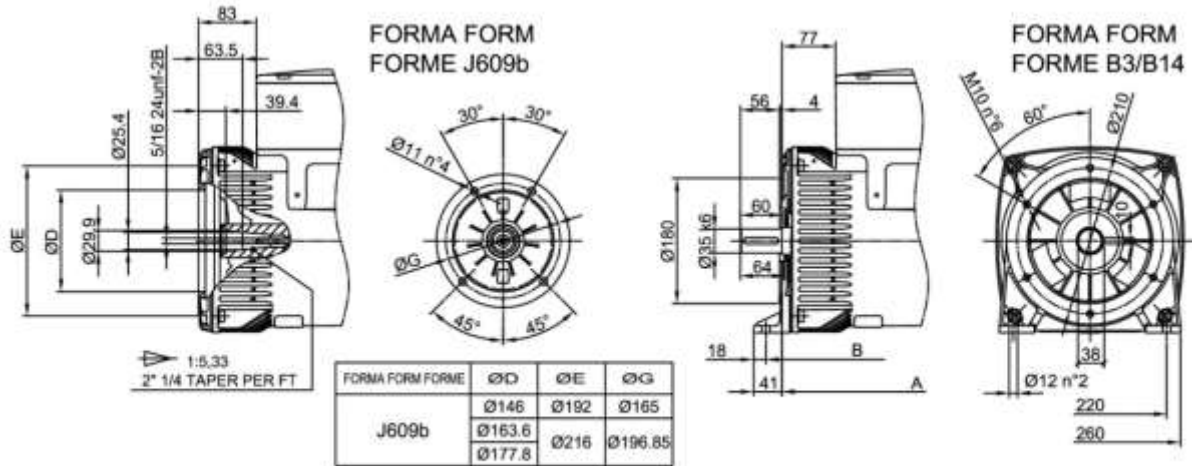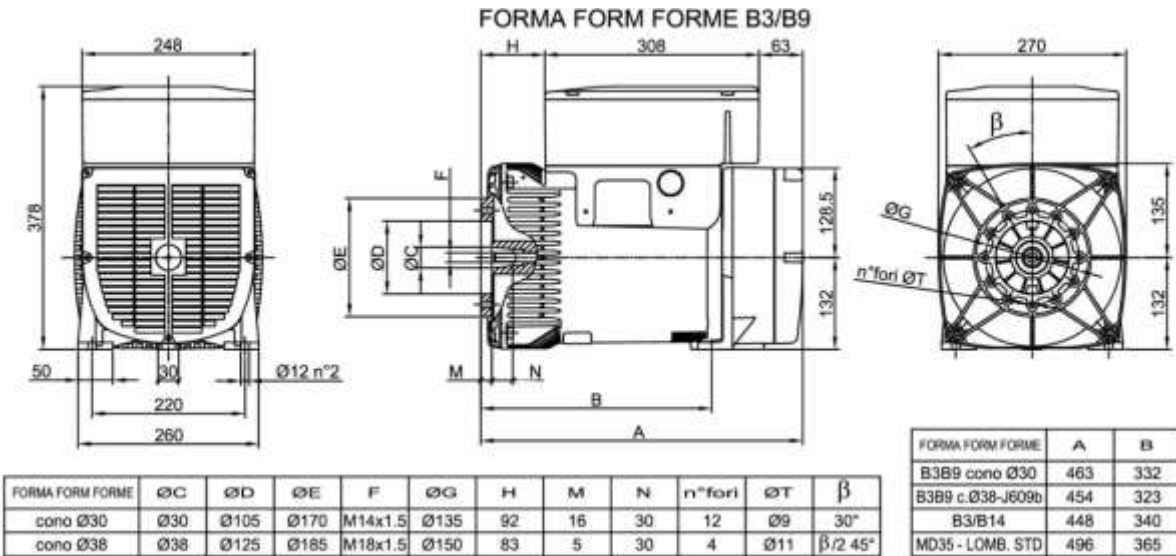

FLANGIE - BRIDE - FLANGE						
SAE N	O	P	Q	n. fori	S	α
5	356	314.3	333.4	8		45°
4	403	362	381	12	11	30
3	451	409.6	428.6	12		30

GIUNTI A DISCO - DISC COUPLING - ACC. DISQUE							
SAE N	L	d	Q1	n. fori	S1	α/1	R
6 1/2	30.2	215.9	200	6	9	60°	
7 1/2	30.2	241.3	222.25	8	9	45°	3
B	62	263.52	244.47	6	10.5	60°	
10	53.8	314.32	295.27	8	10.5	45°	4.5
11 1/2	39.6	352.42	333.37	8	10.5	45°	