

TECHNICAL DATA SHEET



ALTERNATOR E1X13S B/4

Three-Phase brushless synchronous alternator with AVR - 4 poles

E1X13S B/4

COMMON DATA

Rated Power at 50Hz	kVA	8,0	
Rated Power at 60Hz	kVA	10,0	
Rated Power Factor		0,8	
Nominal Temperature	°C	40	
Control System		self-excited	
Execution		brushless	
Regulation Type		AVR	
Insulation Class		H	
Protection		IP21	
Maximum Over speed	rpm	2250	
Overload		110% of rated power for one hour in a cycle of 6 hours	
Air Flow Requirement	m ³ /min	2,8 at 50Hz	3,5 at 60Hz
R.F.I. Suppression		Standard EN55011	

REGULATION DATA

AVR	HVR11	HVR30
Sensing	single-phase	three-phase
Voltage Regulation	±1%	±1%
Sustained Short Circuit	> 300% of rated current	

WINDING DATA

Stator Winding		Double layer with auxiliary winding
Rotor Winding		with damping cage
Winding Pitch		2/3
Number of Leads of Stator		12
Stator Winding Resistance	Ω	1,77 at 20°C
Rotor Winding Resistance	Ω	6,58 at 20°C
Exciter Stator Resistance	Ω	16,5 at 20°C
Exciter Rotor Resistance	Ω	2,15 at 20°C
THD at full load		<3%
THD at no load		<3%
Excitation at no load	Adc	0,51
Excitation at full load	Adc	1,51

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

ON REQUEST

UL 1446, Systems of Insulating Materials - General CSA-C22.2 No. 0, Appendix B, General Requirements - Canadian Electrical Code, Part I

CAN/CSA - C22.2 No. 100-14 (R2009) Motors and Generators, UL1004-1 2nd ed. Rotating Electrical Machines - General Requirements, UL1004-4 2nd ed. Electric Generators

E1X13S B/4

ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	8,0	8,0	8,0	8,0	9,0	9,5	10,0	10,0
	kW	6,4	6,4	6,4	6,4	7,2	7,6	8,0	8,0
Rated Power in Class F (105°C/40°C)	kVA	7,7	7,7	7,7	7,2	8,5	9,0	9,3	9,3
	kW	6,16	6,16	6,16	5,76	6,8	7,2	7,44	7,44
Rated Power Standby (150°C/40°C)	kVA	8,8	8,8	8,8	8,5	9,3	10	10,5	10,5
	kW	7,04	7,04	7,04	6,8	7,44	8,0	8,4	8,4
Rated Power Standby (163°C/27°C)	kVA	9,2	9,2	9,0	8,7	10,0	10,5	11,0	11,0
	kW	7,36	7,36	7,2	6,96	8,0	8,4	8,8	8,8

EFFICIENCY IN CL. H

4/4		82,8%							83,0%
3/4		83,0%							83,3%
2/4		81,0%							82,2%
1/4		76,0%							77,0%

REACTANCES AND TIME CONSTANTS

pcc		0,78							
X _d	- dir. axis synchronous	273%	246%	229%	203%	296%	278%	268%	246%
X' _d	- dir. axis transient	23,3%	21,0%	19,5%	17,4%	25,3%	23,7%	22,9%	21,0%
X'' _d	- dir. axis subtransient	10,0%	9,0%	8,4%	7,4%	10,8%	10,2%	9,8%	9,0%
X _q	- quad. axis reactance	144%	130%	121%	107%	157%	147%	142%	130%
T' _{do}	- O.C. field time constant	320ms							
T' _d	- Transient time constant	27ms							
T'' _d	- Sub-transient time constant	5ms							

MECHANICAL DATA


Bearing non drive end		6305-2Z-C3	
Bearing drive end (B3/B14 form)		6208-2Z-C3	
Weight of generator	in B2	kg	69,9
	in B3/B14	kg	65,8
	in B3/B9	kg	\

E1X13S B/4


MOMENT OF INERZIA

B3/B9	kg·m ²	\
SAE 7½	kg·m ²	0,066
B2	kg·m ²	0,066

DERATING CURVES

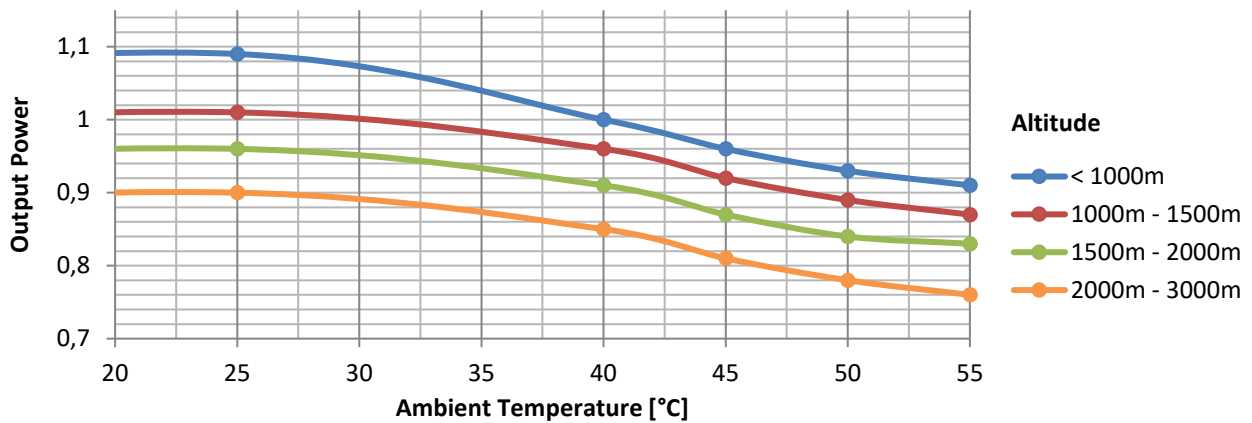


WIRING DIAGRAM

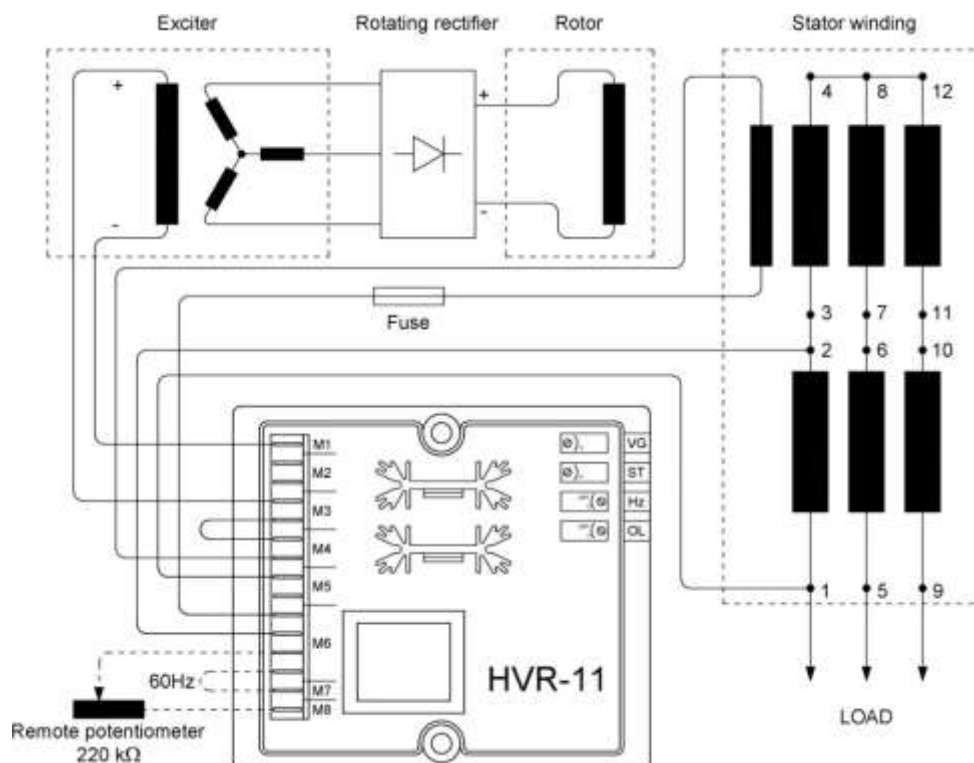

E1X13S B/4


TRANSIENT VOLTAGE VARIATION 50Hz

Transient Voltage Variation @ 50Hz

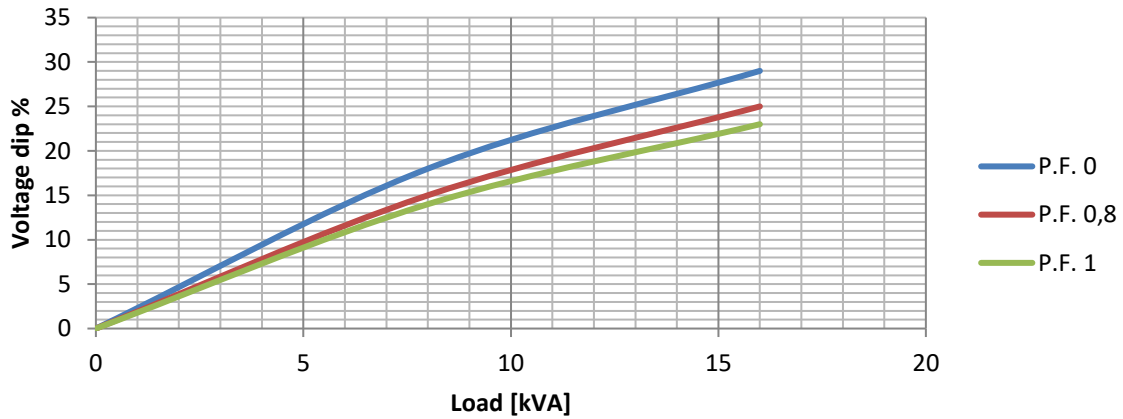

TRANSIENT VOLTAGE VARIATION 60Hz


Transient Voltage Variation @ 60Hz

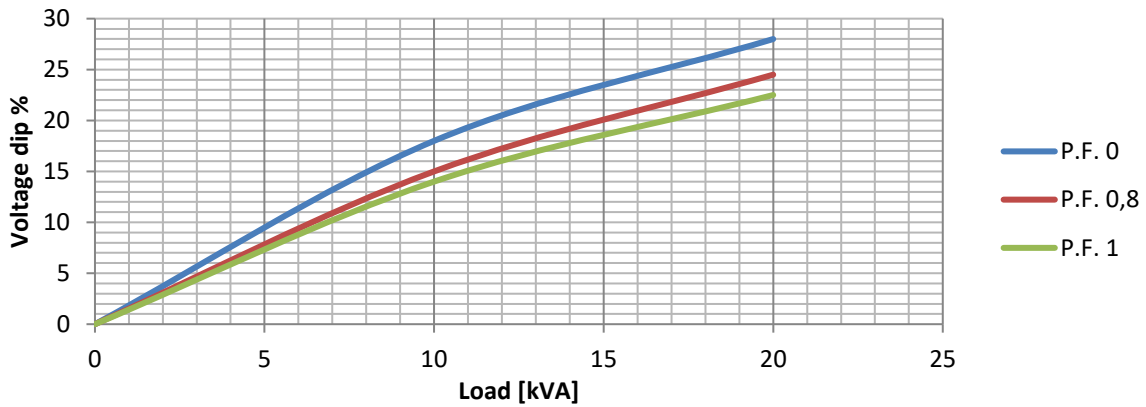

E1X13S B/4


EFFICIENCY 50Hz

Efficiency Curves @ 50Hz



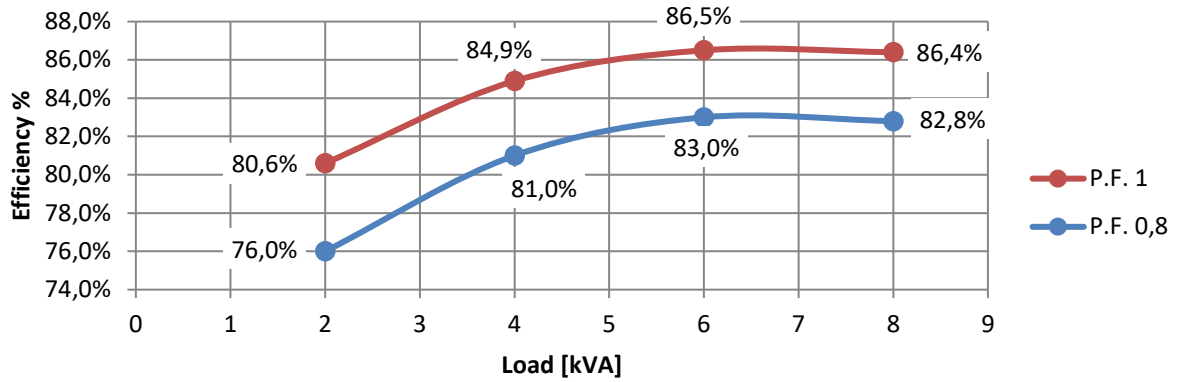


EFFICIENCY 60Hz

Efficiency Curves @ 60Hz

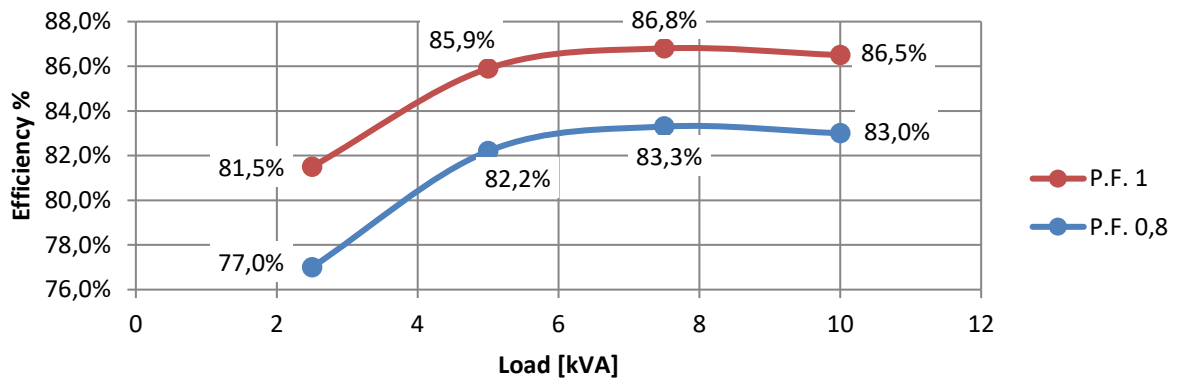

E1X13S B/4

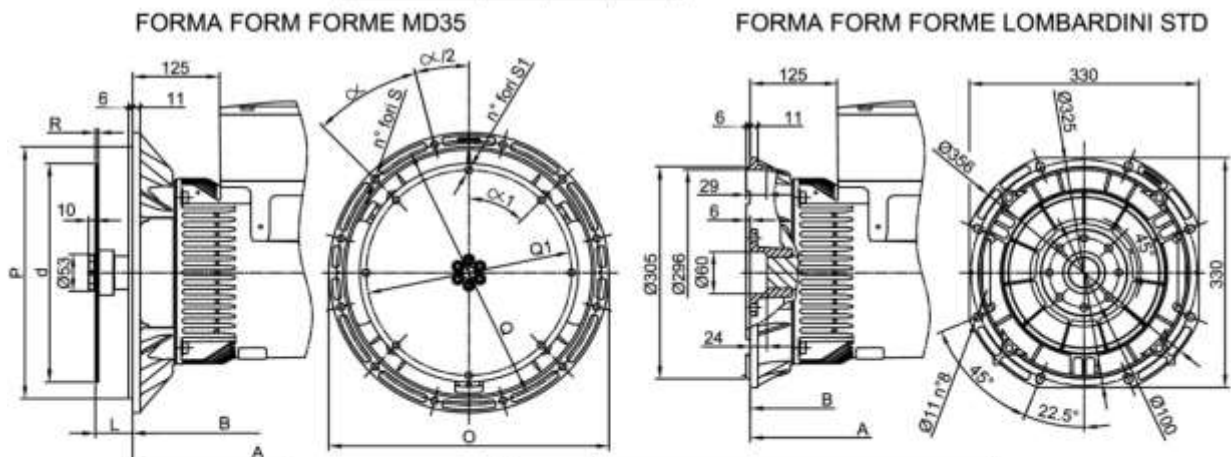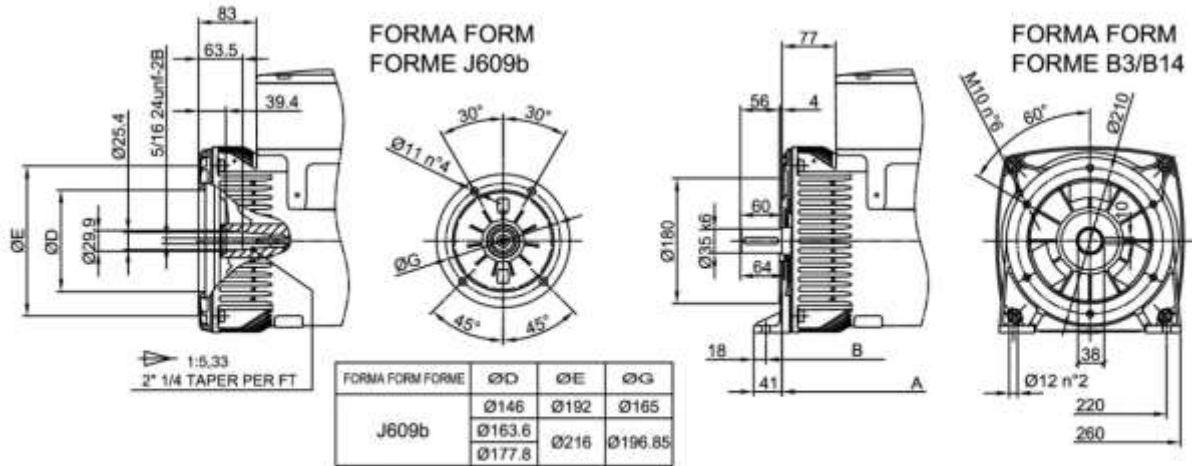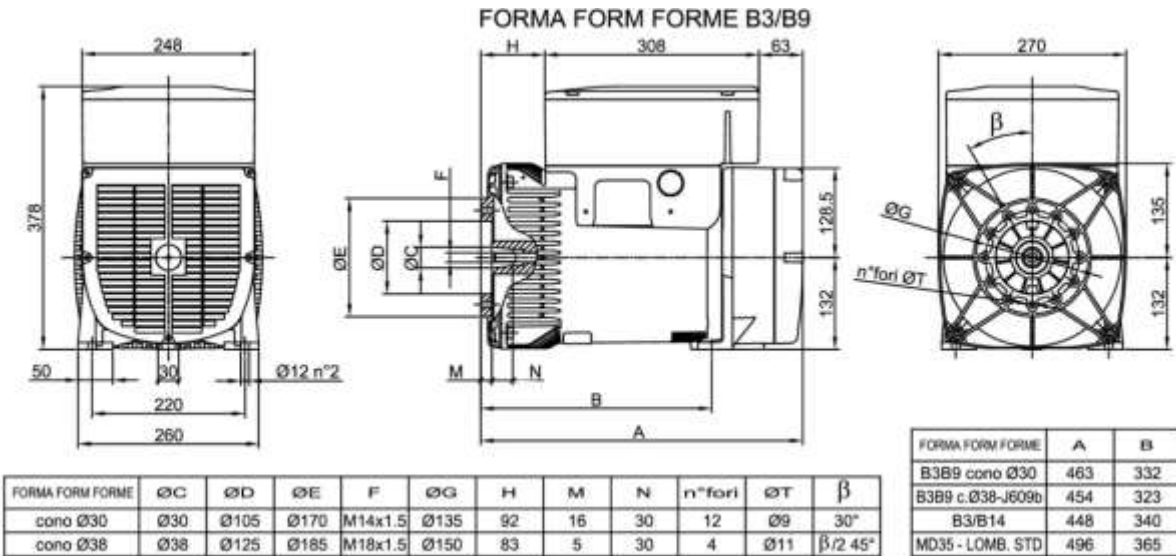

FLANGIE - BRIDE - FLANGE						
SAE N	O	P	Q	n. fori	S	α
5	356	314.3	333.4	8		45°
4	403	362	381	12	11	30
3	451	409.6	428.6	12		30

GIUNTI A DISCO - DISC COUPLING - ACC. DISQUE							
SAE N	L	d	Q1	n. fori	S1	α1	R
6 1/2	30.2	215.9	200	6	9	60°	
7 1/2	30.2	241.3	222.25	8	9	45°	3
B	62	263.52	244.47	6	10.5	60°	
10	53.8	314.32	295.27	8	10.5	45°	4.5
11 1/2	39.6	352.42	333.37	8	10.5	45°	