

TECHNICAL DATA SHEET



ALTERNATOR PRO22S C/4

Three-Phase brushless synchronous alternator with AVR - 4 poles

PRO22S C/4

COMMON DATA

Rated Power at 50Hz	kVA	85
Rated Power at 60Hz	kVA	102
Rated Power Factor		0,8
Nominal Temperature	°C	40
Control System		self-excited
Execution		brushless
Regulation Type		AVR
Insulation Class		H
Protection		IP23
Maximum Over speed	rpm	2250
Overload		110% of rated power for one hour in a cycle of 6 hours
Air Flow Requirement	m ³ /min	18 at 50Hz 21,1 at 60Hz
R.F.I. Suppression		Standard EN55011

REGULATION DATA

AVR	HVR11	HVR30
Sensing	single-phase	three-phase
Voltage Regulation	±1%	±1%
Sustained Short Circuit	> 250% of rated current	

WINDING DATA

Stator Winding	Double layer with auxiliary winding	
Rotor Winding	with damping cage	
Winding Pitch	2/3	
Number of Leads of Stator	12	
Stator Winding Resistance	Ω	0,027 at 20°C
Rotor Winding Resistance	Ω	2,9 at 20°C
Exciter Stator Resistance	Ω	14,3 at 20°C
Exciter Rotor Resistance	Ω	0,47 at 20°C
THD at full load	<3%	
THD at no load	<3%	
Excitation at no load	A _{dc}	0,77
Excitation at full load	A _{dc}	2,3

STANDARD

References	EN60034-1 ISO8528-3 EN55011
------------	-----------------------------

ON REQUEST

UL 1446, Systems of Insulating Materials - General CSA-C22.2 No. 0, Appendix B, General Requirements - Canadian Electrical Code, Part I

CAN/CSA - C22.2 No. 100-14 (R2009) Motors and Generators, UL1004-1 2nd ed. Rotating Electrical Machines - General Requirements, UL1004-4 2nd ed. Electric Generators

PRO22S C/4

ELECTRICAL DATA

Frequency		50Hz - 1500rpm				60Hz - 1800rpm			
Voltage Series Star	V	380/220	400/230	415/240	440/254	415/240	440/254	460/266	480/277
Rated Power in Class H (125°C/40°C)	kVA	85	85	85	72	94	100	102	102
	kW	68	68	68	57,6	75,2	80	81,6	81,6
Rated Power in Class F (105°C/40°C)	kVA	79	79	79	67	88	93	95	95
	kW	63,2	63,2	63,2	53,6	70,4	74,4	76	76
Rated Power Standby (150°C/40°C)	kVA	92	92	90	77	100	105	110	110
	kW	73,6	73,6	72	61,6	80	84	88	88
Rated Power Standby (163°C/27°C)	kVA	96	96	90	79	105	110	115	115
	kW	76,8	76,8	74,4	63,2	84	88	92	92

EFFICIENCY IN CL. H

4/4		90,3%						90,6%
3/4		90,6%						90,8%
2/4		87,9%						89,5%
1/4		84,2%						87,7%

REACTANCES AND TIME CONSTANTS

Pcc		0,45							
X _d - dir. axis synchronous		332%	300%	279%	210%	370%	350%	327%	300%
X' _d - dir. axis transient		21,1%	19,0%	17,7%	13,3%	23,4%	22,2%	20,7%	19,0%
X'' _d - dir. axis subtransient		10,5%	9,5%	8,8%	6,7%	11,7%	11,1%	10,3%	9,5%
X _q - quad. axis reactance		224%	202%	188%	141%	249%	236%	220%	202%
T' _{do} - O.C. field time constant		258ms							
T' _d - Transient time constant		21ms							
T'' _d - Sub-transient time constant		11ms							

MECHANICAL DATA


Bearing non drive end			6309-2RS-C3
Bearing drive end (B3/B14 form)			6314-2RS-C3
Weight of generator	in B2	kg	341
	in B3/B14	kg	343
	in B3/B9	kg	\

PRO22S C/4


MOMENT OF INERZIA

B3/B9	kg·m ²	\
SAE 7½	kg·m ²	\
SAE 8	kg·m ²	\
SAE 10	kg·m ²	\
SAE 11½	kg·m ²	0,932
SAE 14	kg·m ²	1,080
SAE 18	kg·m ²	\
B3/B14	kg·m ²	0,854

DERATING CURVES

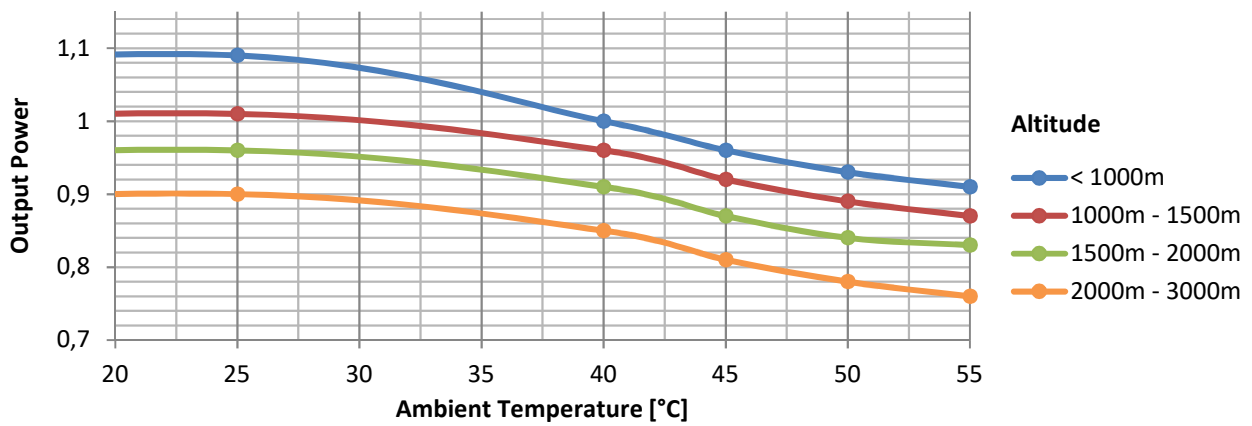


WIRING DIAGRAM

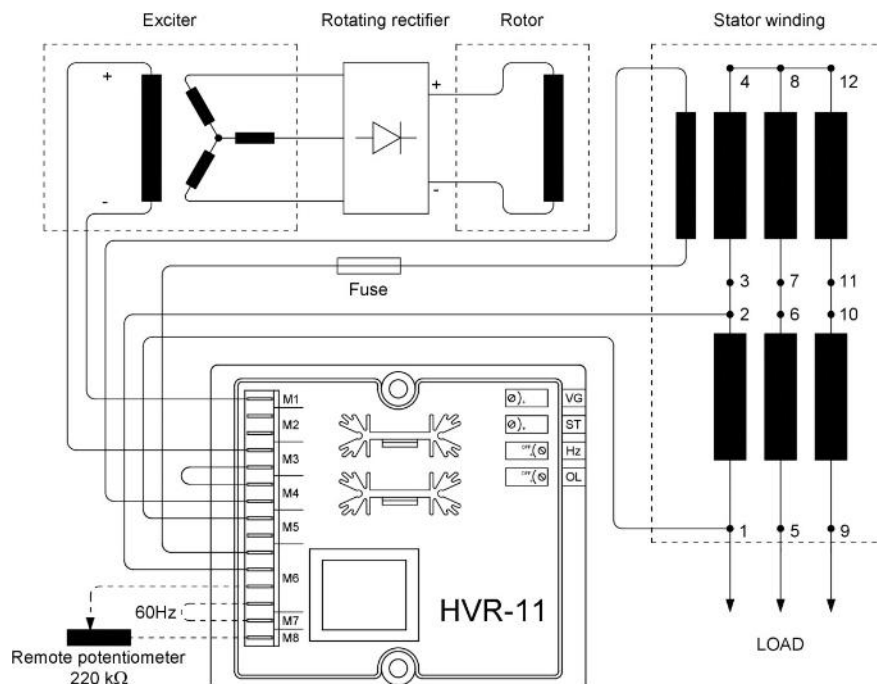

PRO22S C/4


TRANSIENT VOLTAGE VARIATION 50Hz

Transient Voltage Variation @ 50Hz

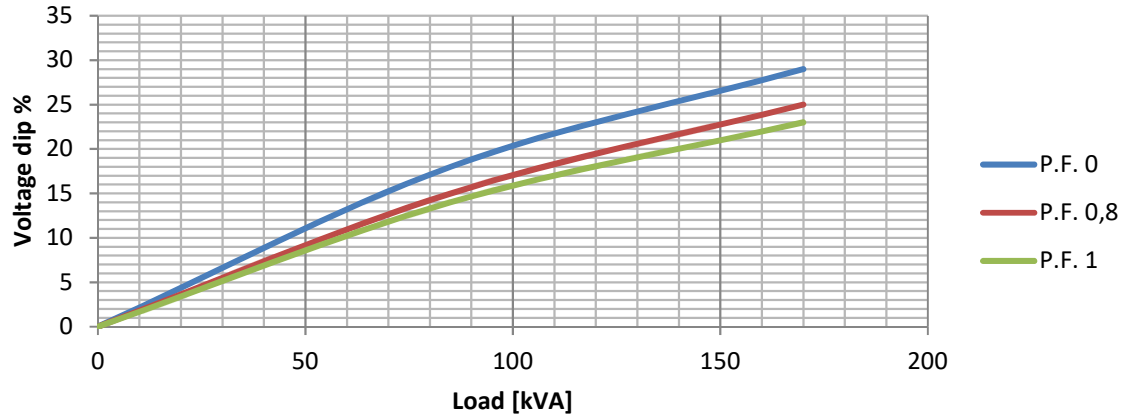

TRANSIENT VOLTAGE VARIATION 60Hz


Transient Voltage Variation @ 60Hz

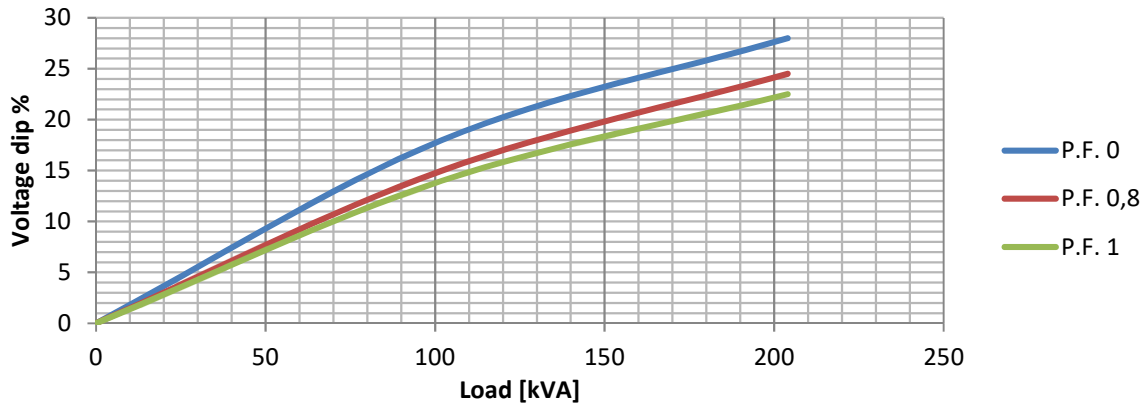

PRO22S C/4

EFFICIENCY 50Hz

Efficiency Curves @ 50Hz

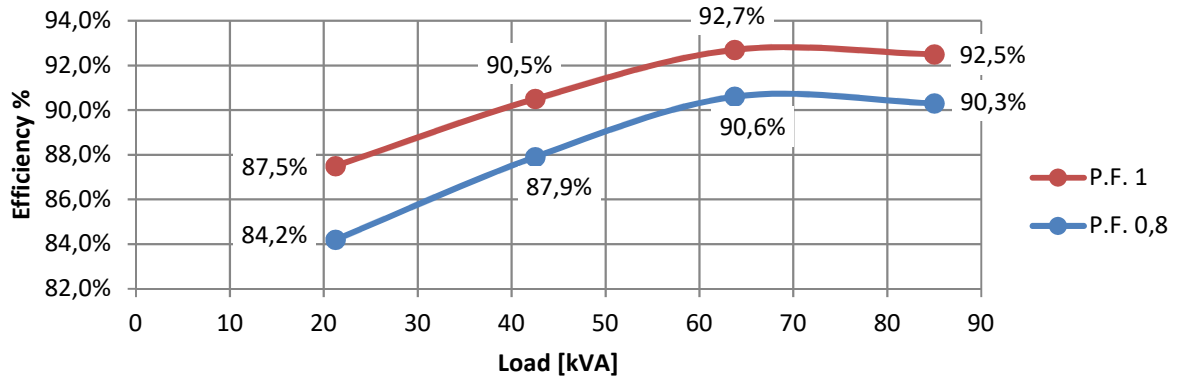

EFFICIENCY 60Hz

Efficiency Curves @ 60Hz

