

FOX 211 DIGITAL



INCLUDED

- 23000350 · MIG torch ERGO PLUS 25 · 3 m
- 43210132 · Ground cable · 25mm² · 3 m
- 43205098 · MMA welding cable · 16mm² · 3 m
- 22905090 · Pressure regulator ECO Mini CO₂
- 22910014 · Adaptor for gas bottle
- 33805101 · Drive rolls Ø 30mm · 0,8 - 1,0 mm



OPTIONAL


- 99900195 · Trolley
- 23020154 · TIG Torch Eurotig 26V · 4m with gas valve · conn. 50mm²



| | FOX 211 | | |
|-----------------|---------------------------|---------------------------|---------------------------|
| Input voltage | (1ph) 230V 50/60Hz | | |
| Power 60% | 5,5 KVA | | |
| | MMA | TIG | MIG |
| U _o | 65 V | 65 V | 35 V |
| Amp. Min-Max | 5 ÷ 200 A | 5 ÷ 200 A | 20 ÷ 200 A |
| Duty Cycle 40°C | 200A @ 35% 120A @ 100% | 200A @ 35% 120A @ 100% | 200A @ 35% 140A @ 100% |
| Steel | 0,6 ÷ 1,0 Ø mm | | |
| Stainless Steel | 0,8 ÷ 1,0 Ø mm | | |
| Flux Core | 0,9 Ø mm | | |
| Aluminium | 0,8 ÷ 1,0 Ø mm | | |
| Brazing | 0,8 ÷ 1,0 Ø mm | | |
| Ø Electrode | 1,6 ÷ 5,0 Ø mm | | |
| Electrode Type | 6013 - 7018 - CrNi | | |
| Insulation | H | | |
| Protec. Degree | IP22S | | |
| Dimens. (LxWxH) | 480x220x385 mm | | |
| Box (LxWxH) | 685x275x450 mm | | |
| Weight box/net | 23 / 19 Kg | | |
| Code | 99820053 | | |

Fox

MULTIPROCESS INVERTERS

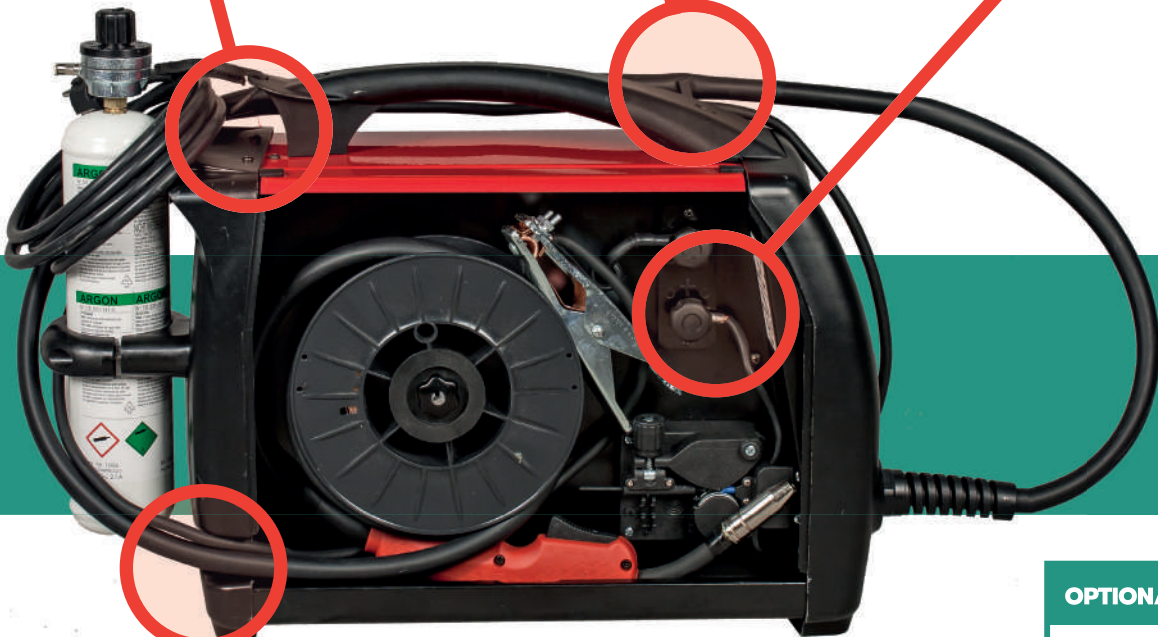

OPTIONAL "FULL GAS"



Trolley

99900195

OPTIONAL "EASY GAS"

Gas regulator



22905001

Disposable Gas cylinders



Plastic Support



04600404