




# GREEN POWER GP1650A/P OPEN (MANUAL CONTROL UNIT)

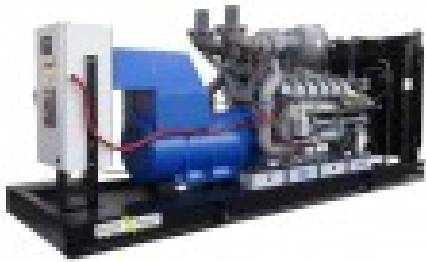

**Product price:**

**200.836,00 € tax excluded**

## **Product description:**

The GREEN POWER 1500 rpm generators are designed for versatile use, from construction sites to industry, from agriculture to civil protection.

Robust welded steel frames with built-in tank of variable capacity produced by Green Power, engines and alternators supplied by the most important manufacturers in the sector and cutting-edge control units are the elements to ensure generators of excellent quality.

The hoods are made of steel, which allows them to be used in tropical environments. The Green Power covers guarantee maximum accessibility for maintenance and cleaning operations.

Green Power's strong point is the design and implementation within the company, a feature that helps to reduce the time to market of the product and allows any customization.

**THIS PRODUCT IS ONLY AVAILABLE IN THE AUTOMATIC CONTROL UNIT VERSION**

## **You can choose between the versions:**

- Open group with AVR-Leroy alternator (automatic power pack)
- Open group with AVR-Mecc Alte alternator (automatic power pack)
- Open group with AVR-Stamford alternator (automatic power pack)

The image is purely indicative.



**Product features:**

Phase: Three phase

Maximum power three phase (KW): 1320

Continuous power three phase (KW): 1200

Maximum power three phase (KVA): 1650

Continuous power three phase (KVA): 1500

Fuel: Diesel

Frequency (Hz): 50

Voltage (V): 230 / 400

Engine: 1506A-E88TAG2

Emissions Regulations: NON EMISSIONATO

Engine rpm (rpm): 1500

Speed governor: Electronic

Starting system: Elettrico

Engine capacity (cm<sup>3</sup>): 45842

Number cylinders: 12

Cylinders' position: In line

Cooling: Water

Alternator: LINZ PRO 22SD/4 - Sincrono

Poles: 4

Protection degree: IP23

Fuel tank capacity (L): 800

Consumption (L/h): 237 Lt/h al 75% del carico

Running time (h): 3.37 h al 75% del carico

Length (mm): 5200

Width (mm): 2200

Height (mm): 2500

Dry weight (Kg): 12000

Silenced: No

Super silenced: No

ATS Switch device : Optional

Voltage regulator: AVR

