




# GREEN POWER GP1000A/C OPEN (MANUAL CONTROL UNIT)

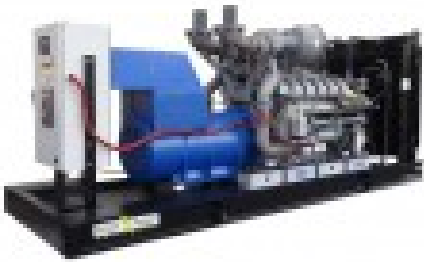

**Product price:**

**104.855,00 € tax excluded**

## **Product description:**

GREEN POWER GP1000A/C OPEN (MANUAL CONTROL UNIT)

Discover the GREEN POWER GP1000A/C in its open design, equipped with a manual control unit for precise and hands-on operation. This model represents GREEN POWER's commitment to delivering performance with the advantage of manual control, ensuring flexibility and reliability in a variety of applications. Its open configuration allows for easy installation and maintenance, making it an essential tool for those demanding peak efficiency. The GREEN POWER 1500 rpm generators are designed for versatile use, from construction sites to industry, from agriculture to civil protection.

Robust welded steel frames with built-in tank of variable capacity produced by Green Power, engines and alternators supplied by the most important manufacturers in the sector and cutting-edge control units are the elements to ensure generators of excellent quality.

The hoods are made of steel, which allows them to be used in tropical environments. The Green Power covers guarantee maximum accessibility for maintenance and cleaning operations.

Green Power's strong point is the design and implementation within the company, a feature that helps to reduce the time to market of the product and allows any customization.

The image is purely indicative.

## **Product features:**

Phase: Three phase



---

Maximum power three phase (KW): 396  
Continuous power three phase (KW): 480  
Maximum power three phase (KVA): 495  
Continuous power three phase (KVA): 600  
Fuel: Diesel  
Frequency (Hz): 50  
Voltage (V): 230 / 400  
Engine: 1506A-E88TAG2  
Engine rpm (rpm): 1500  
Speed governor: Electronic  
Starting system: Electric  
Engine capacity (cm<sup>3</sup>): 8800  
Number cylinders: 12  
Cylinders' position: In line  
Cooling: Water  
Alternator: LINZ PRO 22SD/4 - Sincrono  
Poles: 4  
Fuel tank capacity (L): 400  
Consumption (L/h): 24.7 Lt/h al 75% del carico  
Running time (h): 9.62 h al 75% del carico  
Length (mm): 4500  
Width (mm): 2050  
Height (mm): 2350  
Dry weight (Kg): 3430  
Silenced: No  
Super silenced: No  
ATS Switch device : Optional  
Voltage regulator: AVR