




# GREEN POWER GP2530A/M OPEN (MANUAL CONTROL UNIT)

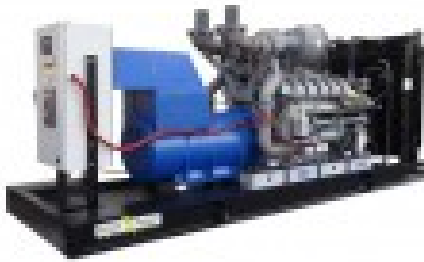

**Product price:**

**384.822,00 € tax excluded**

## **Product description:**

The GREEN POWER 1500 rpm generators are designed for versatile use, from construction sites to industry, from agriculture to civil protection.

Robust welded steel frames with built-in tank of variable capacity produced by Green Power, engines and alternators supplied by the most important manufacturers in the sector and cutting-edge control units are the elements to ensure generators of excellent quality.

The hoods are made of steel, which allows them to be used in tropical environments. The Green Power covers guarantee maximum accessibility for maintenance and cleaning operations.

Green Power's strong point is the design and implementation within the company, a feature that helps to reduce the time to market of the product and allows any customization.

The image is purely indicative.

## **Product features:**

Phase: Three phase

Maximum power three phase (KW): 2024

Continuous power three phase (KW): 1840

Maximum power three phase (KVA): 2530

Continuous power three phase (KVA): 2300

Fuel: Diesel

Frequency (Hz): 50

Voltage (V): 230 / 400

Engine: MTU 16V 4000 G24F

Engine rpm (rpm): 1500

Speed governor: Electronic



---

Starting system: Electric  
Engine capacity (cm<sup>3</sup>): 76300  
Number cylinders: 16  
Cylinders' position: In line  
Cooling: Water  
Alternator: MECC ALTE ECO46-1.5L/4  
Poles: 4  
Fuel tank capacity (L): 800  
Consumption (L/h): 427 Lt/h al 75% del carico  
Running time (h): 1.87 h al 75% del carico  
Length (mm): 6100  
Width (mm): 2300  
Height (mm): 3000  
Dry weight (Kg): 12500  
Silenced: No  
Super silenced: No  
ATS Switch device : Optional  
Voltage regulator: AVR  
Precision of voltage regulation:  $\pm 1\%$