


NANNI QMS16M MARINE GENERATOR 16.2KW

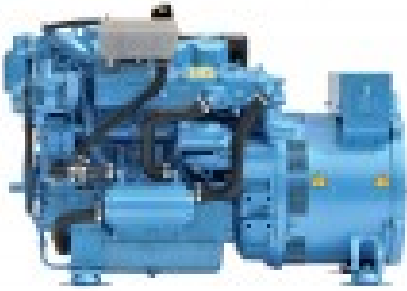

Product description:

NANNI QMS16M MARINE GENERATOR 16.2KW

NANNI QMS16M is a three-phase marine generator equipped with a Kubota 4-stroke engine with Diesel power supply capable of delivering a maximum power of 16.2KW.

The NANNI QMS16M is equipped with a Kubota base engine which has been used for years in marine and industrial applications all over the world.

The NANNI QMS16M generator is equipped with a fast-heating injector and glow plug and are located in the combustion chamber, ensuring that the engine will start even at low temperatures.

The cooling system allows the NANNI QMS16M to operate at an optimal temperature. In the case of closed-loop heat exchanger cooling, the coolant is cooled by seawater flowing through the heat exchanger.

The E-TVCS injection system produces an ideal mixture of air and fuel by creating three swirls in the combustion chamber. The combustion efficiency of the NANNI QMS16M is improved, resulting in low fuel consumption.

NANNI QMS16M is complete with freshwater and saltwater exchanger. Also available with a keel cooling system, also known as Keel Cooling.

The NANNI QMS16M's alternator provides 13.9 KW of power in continuous operation and can produce up to 16.2 KW. Protection level IP23 (protection level available on request).

TECHNICAL FEATURES NANNI QMS16M

Maximum power Single-phase: 16.2 KW

Single-phase continuous use power: 13.9 KW

Fuel: Diesel
Voltage: 230 V
Frequency: 50 Hz
Engine: Kubota, 4 stroke
Starting: Electric
Consumption: 4.8 Lt/h at full load
Length: 1014 mm
Width: 548 mm
Height: 691 mm
Weight: 328 Kg

Are you looking for a marine power generator with different technical features? Here you can find the full range NANNI or other brands specializing in the field.

The image and technical data are not binding and may be subject to revisions by the manufacturer.

Product features:

Phase: Single phase
Maximum power single phase (KW): 16.2
Continuous power single phase (KW): 13.9
Fuel: Diesel
Frequency (Hz): 50
Voltage (V): 230
Engine: Kubota, 4 stroke
Engine rpm (rpm): 1500
Starting system: Electric
Engine capacity (cm³): 2197
Number cylinders: 4
Cylinders' position: In line
Oil capacity (L): 7.5
Cooling: Water
Inyección : Indirect (E-TVCS)
Alternator: Electronic regulator
Bore x stroke (mm): 87 x 92.4
Consumption (L/h): 4.8 at 100% of the load
Length (mm): 1014
Width (mm): 548
Height (mm): 691

Dry weight (Kg): 328

Silenced: No