


VITRIFRIGO MACS 12000 HEAT PUMP SINGLE- BLOCK NAUTICAL AIR CONDITIONER 12000 BTU/h

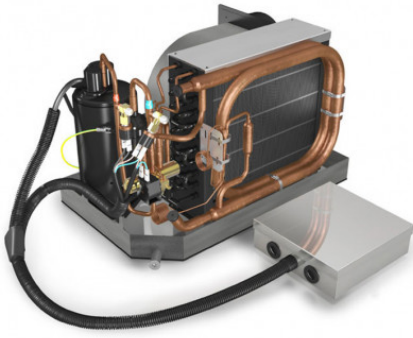

Product price:

1.601,38 € tax excluded

Product description:

VITRIFRIGO MACS12000 AIR CONDITIONER NAUTICAL ONE-BLOCK UNIT HEAT PUMP

VITRIFRIGO MACS12000 NAUTICAL HEAT PUMP AIR CONDITIONER in a monoblock unit suitable for use on boats, with a cooling capacity of 12000 BTU/h.

VITRIFRIGO MACS12000 Nautical CLIMATISER is designed to ensure maximum comfort and well-being on board, even in extreme climatic conditions. The cooling capacity of the Vitrifrigo MACS12000 Nautical is 12,000 BTU/h, which means it can cool an area of approximately 20-25 square metres. The machine is equipped with an on-board compressor, which ensures greater energy efficiency and quieter operation than other air conditioning units.

The temperature can be controlled digitally, allowing the user to set the desired temperature precisely. The LCD display on the control panel provides precise information on the set temperature and the current temperature.

In addition, the Vitrifrigo MACS12000 Nautical AIR CONDITIONER uses environmentally friendly R410A refrigerant, which has low greenhouse gas emissions and meets international environmental standards. This makes it a sustainable choice for those who want a high-quality, environmentally friendly air conditioning system.

TECHNICAL CHARACTERISTICS VITRIFRIGO MACS12000 NAUTICAL:

Phase type: Single-phase

Power supply voltage: 230V

Frequency: 50Hz

Air delivery Ø: 152 mm
Ø condensate discharge pipe: 18 mm
Switch cabinet dimensions: 245 x 188 x 64 mm
Nominal capacity in cooling mode (BTU/h): 12000
Nominal capacity in heating mode (BTU/h): 13000
Rated consumption power (cooling mode): 0.9 KW
Rated power consumption (heating mode): 1.1 KW
Rated consumption in cooling mode: 4 A
Nominal consumption in heating mode: 4.7 A
Treated air flow rate: 540 mc/h
Recommended pump capacity: 900 l/h
Width: 520 mm
Depth: 321 mm
Height: 330 mm
Net weight: 26 kg

You are looking for a product similar to VITRIFRIGO MACS12000 Nautical or with different technical characteristics? Here you can find the area dedicated to nautical air conditioners VITRIFRIGO or other specialized brands.

Images and technical data are not binding.

Product features:

Phase: Single phase
Frequency (Hz): 50
Voltage (V): 230
Outlet diameter thread type (mm/inches): 152 - 6
Refrigerating yield: 12000 BTU/h
Heating power: 13000 BTU/h
Absorbed average current, refrigerating (A): 4
Absorbed average current, heater (A): 4.7
Inlet power, refrigerating (KW): 0.9
Inlet power, heater (KW): 1.1
Maximum air flow rate (m³/h): 540
Length (mm): 520
Width (mm): 330
Height (mm): 321
Product type: Air conditioner
Coolant: R410A
Weight (Kg): 26