


# Vitrifrigo Centrifugal Seawater Pump BCM22E

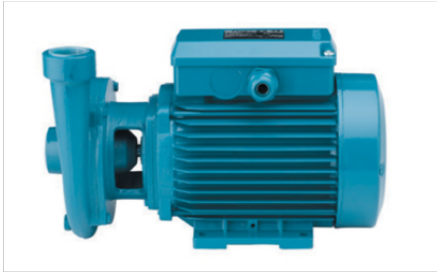

**Product price:**

**683,39 € tax excluded**

## **Product description:**

### VITRIFRIGO CENTRIFUGAL SEAWATER PUMP BCM22E

The VITRIFRIGO Centrifugal Seawater Pump with open impeller is an exceptional solution to meet the needs of seawater distribution aboard yachts and boats.

With a power supply of 230V/1ph/50Hz and a current draw of 4.5A, the VITRIFRIGO Centrifugal Seawater Pump with open impeller is designed to maximize energy efficiency and ensure long-term use without issues of overheating or overload.

Its compact dimensions, with a length of 303 mm, a width of 186 mm, and a height of 181 mm, make it suitable even for limited spaces on board. Despite weighing 9.6 kg, this VITRIFRIGO pump is characterized by a robust construction that ensures reliable distribution of seawater at any time.

The VITRIFRIGO Centrifugal Seawater Pump with open impeller offers an impressive flow rate, ranging from 1500 to 6600 liters per hour at various lift heights.

This allows for smooth and uniform distribution of water, ensuring a comfortable and safe navigation experience.

Furthermore, thanks to its advanced technology and open impeller, this VITRIFRIGO pump ensures quiet and vibration-free operation, contributing to maintaining a peaceful environment during navigation.

The VITRIFRIGO Centrifugal Seawater Pump with open impeller is therefore ideal for enhancing crew comfort aboard vessels, guaranteeing high performance and uniform distribution of seawater.

The VITRIFRIGO Pump with open impeller is an exceptional solution for seawater distribution aboard yachts and boats, providing efficient and reliable performance in any marine environment.



---

## Technical specifications VITRIFRIGO Seawater Pump Centrifuge:

Alimentación: 230V/1ph/50Hz

Corriente absorbida: 4,5 A

Entrada de agua: 1 mm.

Salida de agua: 1 mm.

Caudal: 1500/21 m - 4800/17,5 m - 6600/7,5 m

Longitud: 303 mm.

Anchura: 186 mm.

Altura: 181 mm.

Peso: 9,6 kg

Are you looking for a marine air conditioner? [HERE](#) you can find the area dedicated to Vitrifrigo marine air conditioners or other specialized brands.

Non-binding images and technical data.

### Product features:

Maximum permissible current (A): 4.5

Length (mm): 303

Width (mm): 186

Height (mm): 181

Dry weight (Kg): 9.6

Feed Type: 230V/1ph/50Hz

Capacity (Lt/h): 1500/21 m - 4800/17,5 m - 6600/7,5 m

Water Inlet (mm.): 1

Water Outlet: 1

