


## E8000 400V 50HZ

### ENERGY AT FAIR PRICE

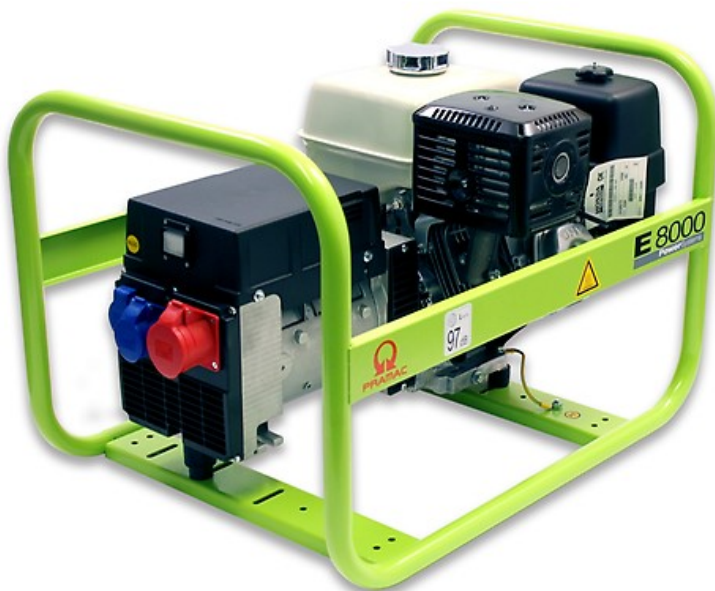

Simple professional generator. Pramac has designed this generator to ensure a high performance level at attractive price. Powerful and strong generator; easy to maintain, it will be soon essential to all your activities.

#### Main Features

Frequency	Hz	50
Voltage	V	400
Power factor	cos $\phi$	0.8
Phase and connection		3

#### Power Rating

Standby power LTP	kVA	8.3
Standby power LTP	kW	6.6
Continuous power COP	kVA	7.0
Continuous power COP	kW	5.6

#### Single Phase Power Rating

Single phase standby power LTP	kVA	4.0
Single phase continuous power COP	kVA	3.7

Ratings definition (According to standard ISO8528 1:2005)

### Engine specifications

Engine manufacturer		Honda
Model		GX390 Recoil
Engine cooling system		Air
Displacement	cm <sup>3</sup>	389
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Petrol
Oil capacity	l	1.1
Starting system		Recoil



### Alternator Specifications

Type		Brushes
Class		H
Voltage regulation system		Compound
IP protection		23
Poles		2
Frequency	Hz	50
Voltage tolerance	%	6

### Dimensional data

Length	(L) mm	750
Width	(W) mm	578
Height	(H) mm	531
Dry weight	Kg	80
Fuel tank capacity	l	6.1

### Autonomy

Running time @ 75% PRP	h	2.84
Running time @ 100% PRP	h	2.13

### Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 mt	dB(A)	69

