

# VOYAGER 8.05 DM



Control panel





1500 rpm Yanmar engine



Fuel inlet and outlet



Unit of measure: mm

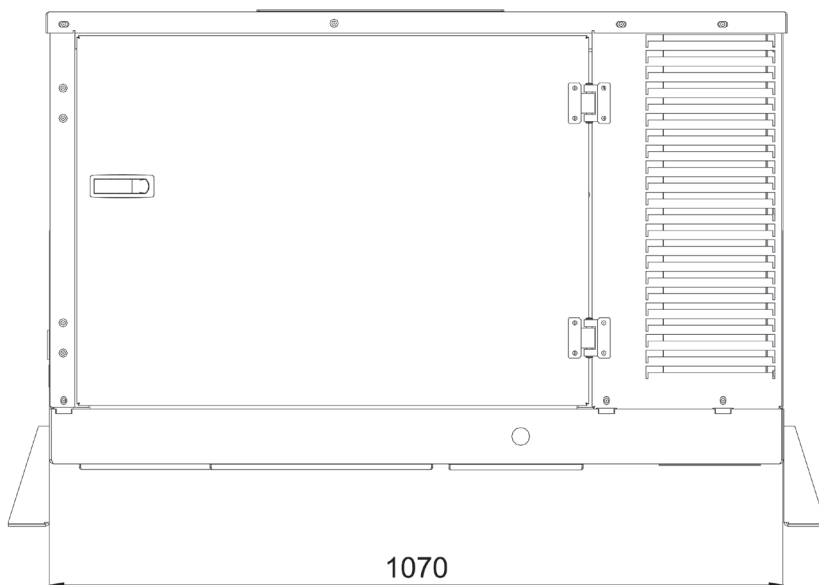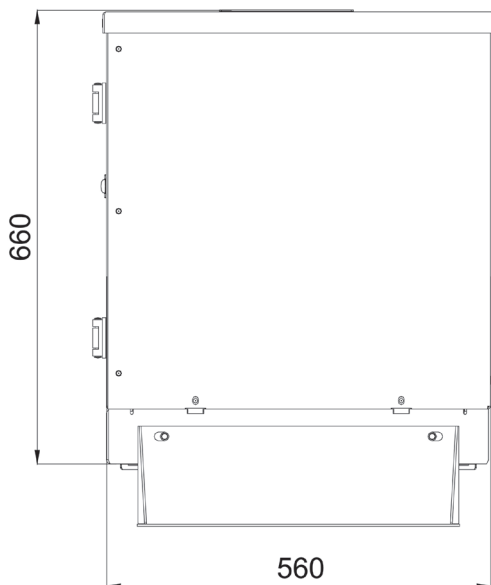

We reserve the right to change data, images and drawings without notice.  
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa  
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311  
www.masegenerators.com - commercial@masegenerators.com





Output power 10 kVA single-phase

## Description

- Vehicular power generator
- Diesel engine 1500 rpm
- Super silenced model

## Standard Features

- Remote control panel with: multifunction display showing generator voltage, battery voltage, frequency, hour meter, rpm
- Built-in control panel
- Start / Stop button
- Connection cable to remote panel
- Safety shutdown in case of: low oil level, high water temperature
- Engine failure warning lights
- Operation lamp
- Hourmeter
- Circuit breaker for the generator protection
- General shutdown switch
- Faults memory
- External muffler

## Options

- 20 lt plastic fuel tank with brackets
- 20 lt steel fuel tank with brackets
- Fuel reserve indicator kit
- Fuel filler with key lock cap
- 1 mt fuel pipe for connection tank-fuel filler
- Fuel pipe I/O to the automatic tank
- CBU remote control panel with 20 mt cable

## Noise level

- Lwa 83 (58 dB a 7 mt)

## AC generator - 50Hz

- Type: synchronous
- Single-phase power (max.): 10 kVA - 230V
- Power Factor:  $\cos \phi$  0,8

## Diesel Engine 1500 rpm

- Type: Yanmar 3TNV80F - 3 cyl. - 13 hp (9,7 kWm) - 1267 cm<sup>3</sup>
- Cooling system: water
- Starting system: electric
- Fuel consumption @ 75%: 2,2 lt/h

## Other features

- Insulation Class: H
- Ambient temperature: 40 °C (\*)
- Altitude: 1000 mt (\*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 1070 x 560 x 660 mm
- Dry weight: 320 kg

(\*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.