


VOYAGER 20 DT



Control panel




1500 rpm Yanmar engine

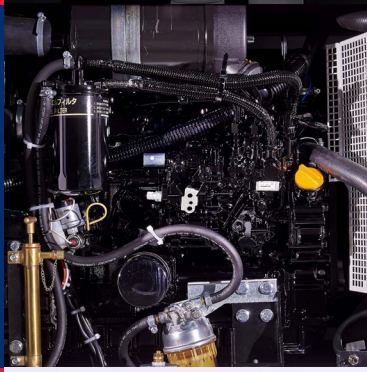

Fuel inlet and outlet



Unit of measure: mm

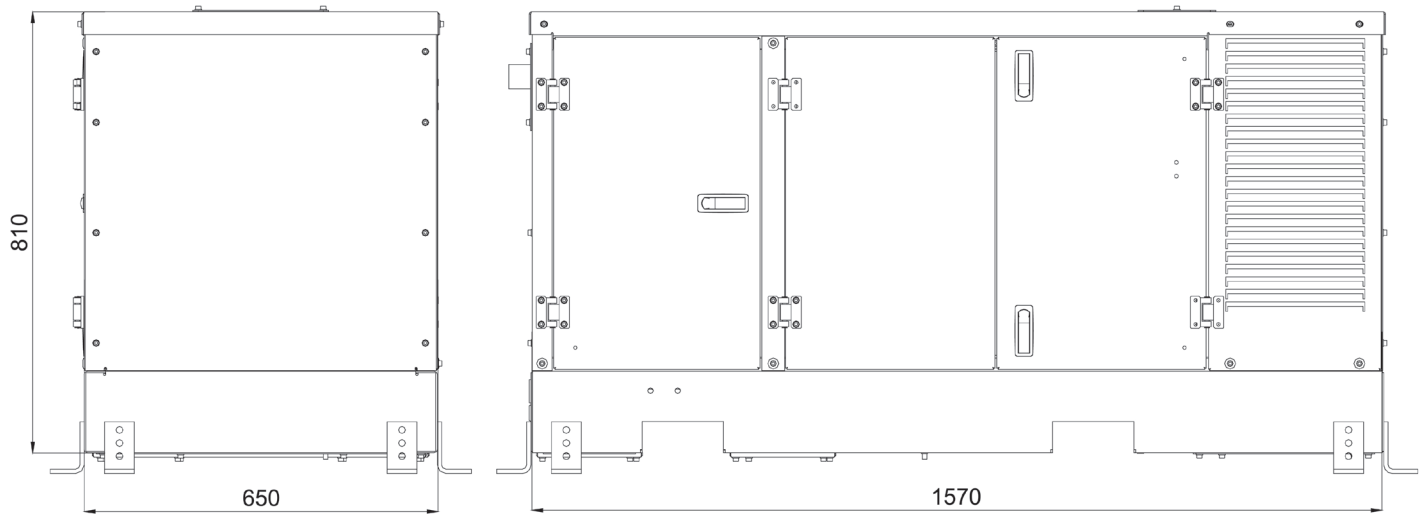

We reserve the right to change data, images and drawings without notice.
For more information, you may contact your local dealer or Mase Generators S.p.A.

Mase Generators spa
Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311
www.masegenerators.com - commercial@masegenerators.com





Output power 19,1 kVA three-phase
Output power 6,3 kVA single-phase

Description

- Vehicular power generator
- Diesel engine 1500 rpm
- Super silenced model

Standard Features

- Remote control panel with: multifunction display showing generator voltage, battery voltage, frequency, hour meter, rpm
- Built-in control panel
- Start / Stop button
- Connection cable to remote panel
- Safety shutdown in case of: low oil level, high water temperature
- Engine failure warning lights
- Operation lamp
- Hourmeter
- Circuit breaker for the generator protection
- Earth leakage circuit breaker
- General shutdown switch
- Faults memory
- Built-in muffler

Options

- 20 lt plastic fuel tank with brackets
- 20 lt steel fuel tank with brackets
- Fuel reserve indicator kit
- Fuel filler with key lock cap
- 1 mt tank connection pipe with fuel filler
- Input/Output fuel pipe to the tank
- CBU remote control panel with 20 mt cable

Noise level

- Lwa 87 (62 dB a 7 mt)

AC generator - 50Hz

- Type: synchronous
- Three-phase power (max.): 19,1 kVA - 400V
- Single-phase power (max.): 6,3 kVA - 230V
- Power Factor: $\cos \phi$ 0,8

Diesel Engine 1500 rpm

- Type: Yanmar 4TNV88 - 4 cyl. - 24,1 hp (18 kWm) - 2190 cm³
- Cooling system: water
- Starting system: electric
- Fuel consumption @ 75%: 3,5 lt/h

Other features

- Insulation Class: H
- Ambient temperature: 40 °C (*)
- Altitude: 1000 mt (*)
- Mechanical Protection: IP 23
- Dimensions (L x W x H): 1570 x 650 x 810 mm
- Dry weight: 550 kg

(*) - For altitude and temperature values other than those listed above, please consult the manufacturer to verify the available power.