


# VISA D41CK GENERATOR 40KVA AVR

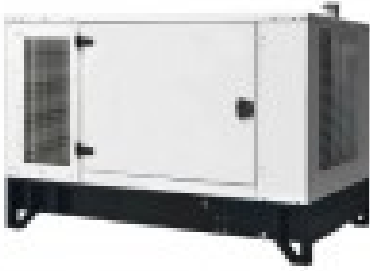

**Product price:**

**10.625,00 € tax excluded**

## **Product description:**

### VISA D41CK GENERATOR SILENCED 40 KVA AVR

The generator silenced VISA D41CK terrestrial, with 40 KVA power in continuous use and AVR, mounts top brand components: the D41CK model uses a reliable DEUTZ F3M2011 3-cylinder, 1500 rpm diesel engine and a STAMFORD S1L2-Y alternator equipped with AVR AS540 with a voltage regulation accuracy of 1%.

VISA CRICKET industrial power generators have silenced casings and tropicalized treatment, so they are suitable for use even in torrid climates; in particular VISA D41CK is water cooled, which ensures excellent heat management.

The VISA D41CK generator is a silenced version with a silenced casing and a tropicalized treatment.

hot-dip galvanized and powder-coated sheet metal, compact base frame, integrated tank without collection tank.

## **Main advantages of choosing an industrial generator VISA D41CK**

- 1 - Original industrial diesel engine with certificate of origin
- 2 - Brushless industrial alternator with AVR
- 3 - Steel base, tank with electro level
- 4 - Soundproofing hood completely made of galvanized sheet metal and painted with polyester powders
- 5 - Soundproofing material in polyester fiber with high abatement
- 6 - Residential exhaust silencer with insulated manifold
- 7 - Electrical panel mounted on board of the machine with control, monitoring and protection device integrated in box
- 8 - Compactness for ease of handling and use
- 9 - Test certification , manuals and diagrams provided

10 - After-sales technical support World wide

11- CRICKET RANGE: from 9 to 200 kVA at 50 or 60Hz.

### **AUTOMATIC CONTROL UNIT AMF Composition control panel of the generator Cricket range:**

- 1 - On/Off key;
- 2 - Emergency stop button;
- 3 - DEEP SEA® 4520 MKII control unit;
- 4 - Primary brand main switch.

### **DEEP SEA® 4520 MKII**

DSE4520 control panel DSE4520 is a compact module for automatic control of power failure. By monitoring a large number of motor parameters, the module can display warning, shutdown and motor status information on the backlit LCD display.

### **TECHNICAL CHARACTERISTICS VISA D41CK GENERATOR**

Phase type: three-phase

Continuous output (PRP): 40 (kVA)

Continuous output (PRP): 32 (kW)

Stand-by power (LTP): 44 (kVA)

Stand-by power (LTP): 35.2 (kW)

Fuel: Diesel

Voltage: 400V

Frequency: 50 Hz

Power factor: 0.8 cos?

Engine: DEUTZ F4M2011 STATIONAL USE

Number of cylinders: 3

RPM: 1500 r.p.m.

Consumption at 75% (R.P.P.) 10.4 l/h

AVR

Setting accuracy: 1%

Are you looking for a Power Generator with different technical features? Here you can find the full range of VISA generators and other specialized brands.

Images and technical data not binding

**Product features:**

Phase: Three phase  
Maximum power three phase (KW): 35.2  
Continuous power three phase (KW): 32  
Maximum power three phase (KVA): 44  
Continuous power three phase (KVA): 40  
Fuel: Diesel  
Frequency (Hz): 50  
Voltage (V): 400  
Sockets configuration: Terminal box  
Engine: DEUTZ F4M2011  
Emissions Regulations: Stationary Use  
Engine rpm (rpm): 1500  
Speed governor: Mechanical  
Starting system: Electric  
Cooling: Water  
Poles: 4  
Silenced: Yes  
Brushes: No  
Product type: Generator  
ATS Switch device : Optional  
Voltage regulator: AVR  
Engine manufacturer: Deutz